
DRC Item 1

REGENCY - GOLDEN HILLS PLAZA MAJOR 4 - SHELL BUILDING for FUTURE GROCER PLANNING SUBMITTAL

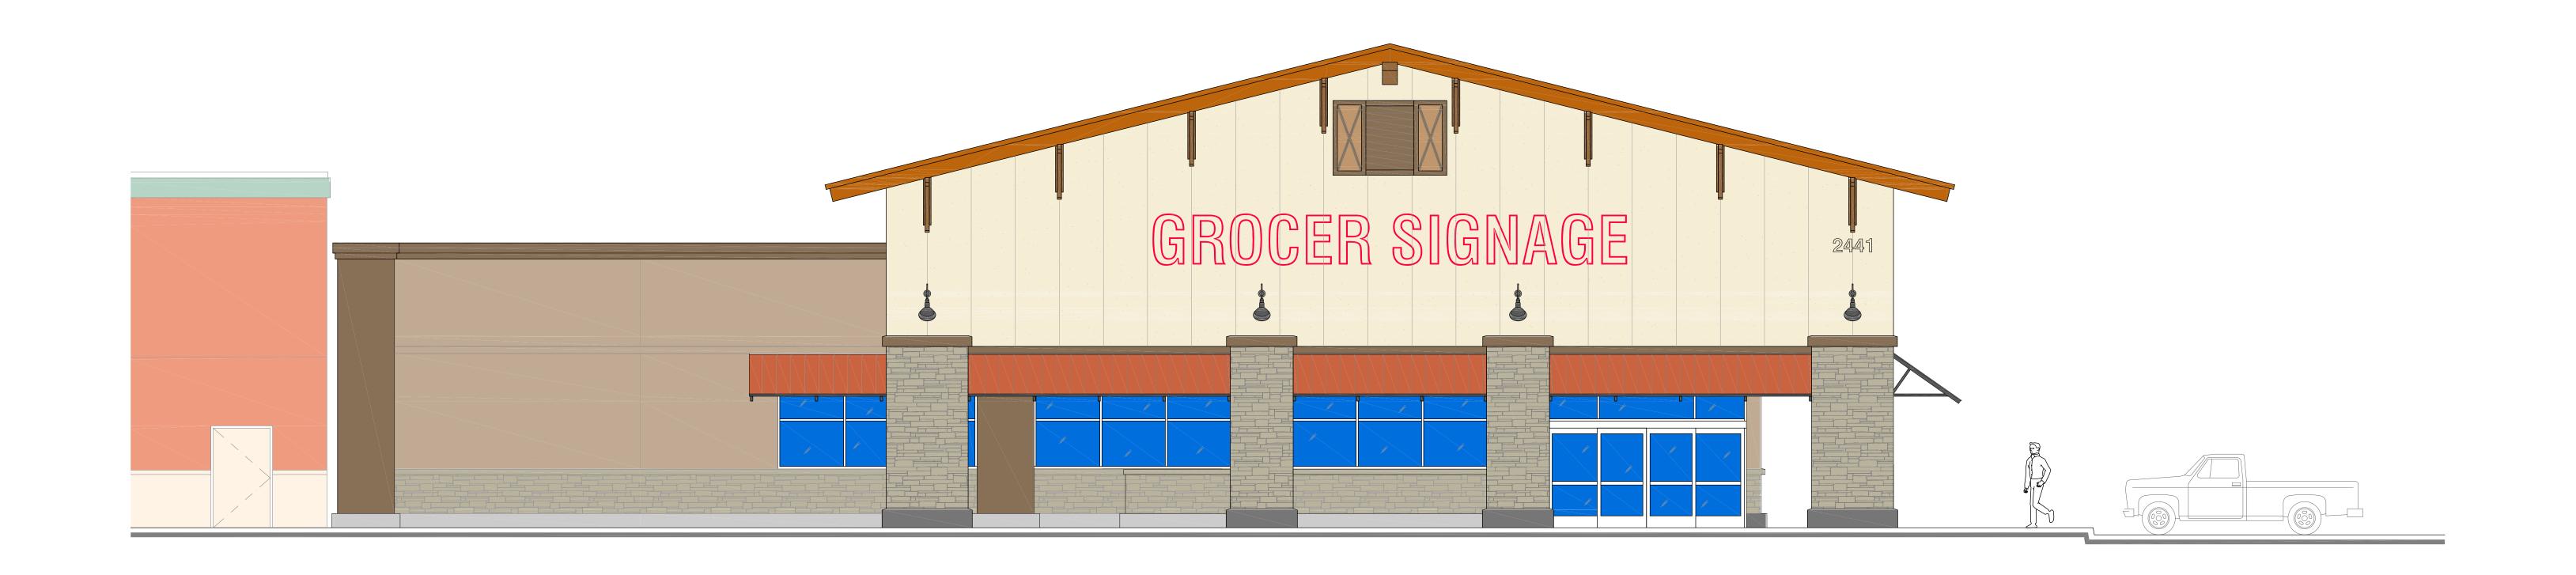

PROJECT DATA

SITE: **EXISTING MAJOR 4 SITE** (CURRENTLY UNDEVELOPED)

ADDRESS: 2445 GOLDEN HILL ROAD, PASO ROBLES, CA

25.08 ACRES

025-422-035 APN:

OVERALL SITE AREA:

PROPOSED BUILDING AREA: 12,494 SF GROSS

DEVELOPMENT AREA: 44,388 SF (1.02 ACRES)

BUILDING TYPE: V-B (SPRINKLERED)

OCCUPANCY: M OCCUPANCY (FUTURE GROCER)

C3 - COMMERCIAL / LIGHT INDUSTRIAL ZONING:

PLANNING RESOLUTION: NO. 08-037 DATED SEPTEMBER 5, 2008

DESCRIPTION

THIS PROJECT DEPICTS A NEW BUILDING ON THE EXISTING 'MAJOR 4' UNDEVELOPED PORTION OF AN EXISTING COMMERCIAL SITE KNOWN AS THE REGENCY GOLDEN HILLS PLAZA PROPERTY. THE SUBJECT SITE IS ONE OF THE THREE UNDEVELOPED SITES WITHIN THE PLAZA AS PREVIOUSLY APPROVED FOR RETAIL USE UNDER THE PLANNING RESOLUTION 08-037 DATED SEPTEMBER 5, 2008.

THE BUILDING LAYOUT IS BASED ON THE REQUIREMENTS FROM A FUTURE 'GROCER' TENANT FOR MERCHANDISING, CUSTOMER ACCESS, AND DELIVERY ACCESS. THE PREVIOUSLY APPROVED SITE STANDARDS FOR COLORS AND FINISHES HAVE BEEN FOLLOWED REGARDING THE EXTERIOR FENESTRATION. THIS INCLUDES STUCCO WALL FINISHES, STONE VENEER, WOOD BRACKETS, STEEL AWNINGS AND STANDING SEAM METAL ROOFING.

THE SITE WORK INCLUDES THE INCORPORATION OF 40 NEW PARKING STALLS, LANDSCAPED AREAS, AN EXTENDED PATH OF ACCESSIBLE TRAVEL THROUGH THIS NEW SECTION OF THE SITE, AND A NEW RECESSED TRUCK

DIRECTORY

REGENCY CENTERS **DEVELOPER:** 1777 BOTELHO DRIVE, SUITE 200 WALNUT CREEK, CA 94596

PHONE: 925.279.1800 CRAIG RAMEY/MICHELLE ROONEY

CIVIL ENGINEERS: KIER + WRIGHT 2850 COLLIER CANYON ROAD

LIVERMORE, CA. 94551 PHONE: 925.245.8488 STEPHEN STROUP, P.E.

ARCHITECT: MARK.THIEME.ARCHITECT, INC. 77 SOLANO SQUARE, #134 BENICIA, CA 94510

PHONE: 707.590.3033 MARK THIEME / RENEE THIEME

STRUCTURAL: COVENANT ENGINEERING P.O. BOX 4260 BEDFORD, WY 83112 PHONE: 916.838.1973

MECHANICAL/ 2D ENGINEERING

4632 CREEK RD. SACRAMENTO, CA 95841 PHONE: 916.247.0240

IAN HEIM

MERRITT MAVY

ELECTRICAL: NORBERG ENGINEERING 5060 ROBERT J MATHEWS PKWY SUITE 102

EL DORADO HILLS, CA 95762 PHONE: 916.996.8322 BILL NORBERG

LANDSCAPE ARCHITECTS:

RENO, NV 89509 PHONE: 775.846-1997

KIENAN HERMAN

GREEN DESIGN LANDSCAPE ARCHITECTS, INC. 1464 POPINJAY DRIVE

SHEET INDEX

SHEET NO.	SHEET DESCRIPTION
GENERAL	
G1.0	COVER SHEET: PROJECT DATA, DESCRIPTION, DIRECTORY, + INDEX
CIVIL	
C1.0	CIVIL COVER SHEET
C2.0	TOPOGRAPHIC SURVEY
C3.0	PRELIMINARY DEMOLITION PLAN
C4.1	PRELIMINARY PAVING + HORIZONTAL CONTROL PLAN
C4.2	PRELIMINARY TYPICAL SECTIONS
C5.0	GRADING + DRAINAGE PLAN
C6.0	PRELIMINARY UTILITY PLAN
C7.0	PRELIMINARY EROSION CONTROL PLAN
ARCHITECTURAL	
SP0.0	PROPOSED OVERALL PROPERTY SITE PLAN - PLANNING EXHIBIT
SP1.0	PROPOSED MAJOR 4 SITE PLAN - PLANNING EXHIBIT
A1.0	PROPOSED ROOF + FLOOR PLAN - PLANNING EXHIBIT

PROPOSED EXTERIOR ELEVATIONS - PLANNING EXHIBIT

PROPOSED EXTERIOR ELEVATION FINISHES + COLOR PALETTE

PROPOSED BUILDING SECTIONS + LINE OF SIGHT DIAGRAM

SITE LIGHTING


A3.0

A3.1

A4.0

PROPOSED MAJOR 4 PHOTOMETRIC PLAN

LANDSCAPING L1.1 LANDSCAPE PLANS L2.1 IRRIGATION PLAN L3.1 LANDSCAPE DETAILS IRRIGATION DETAILS

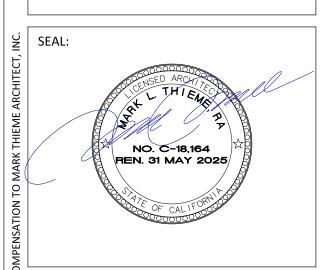

Regency Centers.

Golden Hills Plaza

MAJOR 4

PLANNING REVIEW PROPOSED RETAIL BUILDING

Golden Hill Road Paso Robles, Ca 93446

SHEET DESCRIPTION:

COVER SHEET PROJECT DATA, PROJ DESCRIPTION, DIRECTORY, + SHEET INDEX PLANNING EXHIBIT

	ISSUES:		\triangle	REVIS	SIONS:	
NO.	DATE	ВҮ	DESC	RIPTIC	N	
(P1)	2/7/25	MT	SITE +	DESIGN	REVIEW	SUBMIT
	NUMBER:		510.43	3		
SCA			.A.			
DAT			EGIN:	11/1	5/24	
	AWN BY:	M	IT, RT			
CHE	CKED BY:					

SHEET NUMBER:

CADD FILE NUMBER: 1610.43_PLANNING


GENERAL NOTES

- 1. ALL WORK SHALL BE IN CONFORMANCE WITH THE CITY OF PASO ROBLES DEPARTMENT OF PUBLIC WORKS' STANDARD SPECIFICATIONS AND DETAILS. ALL WORK SHALL BE SUBJECT TO APPROVAL OF AND INSPECTION BY THE CITY ENGINEER.
- 2. AT LEAST ONE SET OF APPROVED PLANS SHALL BE ON THE SITE AT ALL TIMES FOR INSPECTION. ANY DEVIATION FROM THE APPROVED PLANS DURING CONSTRUCTION WILL REQUIRE 48 HOURS PRIOR NOTICE AND APPROVAL OF THE CITY ENGINEER.
- 3. THE PERMITTEE/CONTRACTOR SHALL NOTIFY THE CITY OF PASO ROBLES ENGINEERING DIVISION TWO (2) BUSINESS DAYS PRIOR TO THE START OF ANY WORK.
- 4. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO ASCERTAIN THE EXISTENCE OF ANY AND ALL UNDERGROUND FACILITIES, WHICH MAY BE SUBJECT TO DAMAGE BY REASON OF HIS OPERATIONS. THE CONTRACTOR SHALL NOTIFY UNDERGROUND SERVICE ALERT (USA) AT (800) 642—2444, 48 HOURS PRIOR TO ANY EXCAVATION. WORK SHALL START WITHIN 5 DAYS AFTER THE ISSUANCE OF A USA INQUIRY IDENTIFICATION NUMBER. COMPLETE REMOVAL OF THE USA MARKINGS SHALL BE WITHIN 2 WORKING DAYS AFTER COMPLETION OF THE EXCAVATION, BACKFILL AND SURFACE REPLACEMENT OR FOURTEEN (14) CALENDAR DAYS FOLLOWING THE ISSUANCE OF THE INQUIRY IDENTIFICATION NUMBER WHICHEVER IS FARIER
- 5. CONTACTING USA DOES NOT RELIEVE THE CONTRACTOR FROM HIS RESPONSIBILITY TO DETERMINE LOCATION AND DEPTH OF BURIED UTILITIES OR REPAIR OF BURIED UTILITIES DAMAGED BY HIS OPERATION.
- 6. ALL GRADING, SITE PREPARATION, PLACING AND COMPACTION OF FILL SHALL BE DONE IN ACCORDANCE WITH THE CITY OF CITY OF PASO ROBLES STANDARDS, SPECIFICATIONS, SPECIFIC NOTES, DETAIL DRAWINGS.
- 7. A GRADING PERMIT IS REQUIRED PRIOR TO COMMENCEMENT OF GRADING. A COPY OF THE GRADING PERMIT IS REQUIRED TO BE ON SITE AT ALL TIMES.
- 8. NOISE—PRODUCING CONSTRUCTION AND GRADING OPERATIONS SHALL BE LIMITED TO WEEKDAYS (MONDAY THROUGH FRIDAY) EXCEPT CITY HOLIDAYS AND FROM THE HOURS OF 7:30 A.M. TO 6:00 P.M. ALL EQUIPMENT SHALL BE ADEQUATELY MUFFLED AND MAINTAINED. NO CHANGES SHALL BE ALLOWED WITHOUT PRIOR WRITTEN CONSENT OF THE CITY. ALL REQUESTS FOR CHANGE MUST BE MADE A MINIMUM OF 72 HOURS PRIOR TO THE NEED FOR THE IMPLEMENTATION OF THE REQUESTED CHANGE.
- 9. IT SHALL BE UNDERSTOOD THAT THE TERM "CITY ENGINEER" AS USED HEREIN IS THE CITY ENGINEER OF THE CITY OF PASO ROBLES OR HIS AUTHORIZED REPRESENTATIVE.
- THE ENGINEERING DIVISION.

 10. A PRE—CONSTRUCTION CONFERENCE SHALL BE SCHEDULED AT LEAST TWO WORKING DAYS IN ADVANCE OF COMMENCEMENT OF ANY CONSTRUCTION WORK FOR THE IMPROVEMENTS DELINEATED WITHIN THIS SET OF PLANS. THE FOLLOWING INDIVIDUALS SHALL BE IN ATTENDANCE: OWNER/DEVELOPER, CONTRACTOR(S), CITY ENGINEER, ENGINEER, SOILS ENGINEER, CONSTRUCTION INSPECTOR, OR THEIR AUTHORIZED REPRESENTATIVES.
- 11. THE CONTRACTOR SHALL SUBMIT A SCHEDULE OF ALL GRADING OPERATIONS AND RECEIVE APPROVAL OF SAIL SCHEDULE FROM THE CITY ENGINEER PRIOR TO OR THE DAY OF THE PRE—CONSTRUCTION CONFERENCE.
- 12. THE CONSTRUCTION CONTRACTOR AGREES, THAT IN ACCORDANCE WITH GENERALLY ACCEPTED CONSTRUCTION PRACTICES, TO ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR THE JOB SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THE PROJECT, INCLUDING SAFETY OF ALL PERSONS AND PROPERTY; THAT THIS REQUIREMENT SHALL BE MADE TO APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOURS.
- 13. THE CONTRACTOR SHALL PROVIDE EMERGENCY TELEPHONE NUMBERS FOR PUBLIC WORKS, AMBULANCE, POLICE, AND FIRE DEPARTMENTS AT THE JOB SITE.
- 14. THE CONTRACTOR SHALL NOT DISTURB OR DESTROY ANY PERMANENT SURVEY POINTS WITHOUT THE CONSENT OF THE CITY ENGINEER. IN THE EVENT IT BECOMES NECESSARY TO REMOVE OR DISTURB A MONUMENT, THE PERSON SO DOING SHALL FIRST OBTAIN PERMISSION, IN WRITING, FROM THE CITY ENGINEER AND SHALL DEPOSIT WITH THE CITY ENGINEER A SUFFICIENT AMOUNT, BASED UPON THE CITY ENGINEER'S ESTIMATE, TO COVER THE COST OF PRELIMINARY REFERENCING AND FINAL RELOCATION OF THE MONUMENT.
- 15. ALL CONSTRUCTION STAKING SHALL BE DONE BY A REGISTERED CIVIL ENGINEER OR LICENSED LAND SURVEYOR. UPON COMPLETION OF GRADING, THE CONTRACTOR SHALL REQUEST THE LICENSED LAND SURVEYOR TO CHECK THE GRADES AND CERTIFY THAT THE PADS ARE GRADED TO WITHIN \pm 0.10 FOOT OF FINISH PAD GRADE.
- 16. THE CONTRACTOR SHALL PROVIDE FOR INGRESS AND EGRESS TO AND FROM PRIVATE PROPERTY ADJACENT TO THE WORK AREA THROUGHOUT THE PERIOD OF CONSTRUCTION.
- 17. THE CONTRACTOR IS RESPONSIBLE FOR MATCHING EXISTING STREETS, SURROUNDING LANDSCAPE AND OTHER IMPROVEMENTS, WITH A SMOOTH TRANSITION IN GRADE AVOIDING ANY ABRUPT OR APPARENT CHANGES IN GRADE OR CROSS SLOPE, LOW SPOTS, OR HAZARDOUS CONDITIONS.
- 18. ALL UTILITY STRUCTURES/VAULTS INSTALLED IN PAVED AREAS SHALL HAVE THE STRUCTURE/VAULT LID INSTALLED TO SLOPE WITH THE PAVEMENT.
- 19. EXISTING CURB AND SIDEWALK WITHIN THE PROJECT LIMITS THAT ARE DAMAGED OR DISPLACED, EVEN THOUGH THEY WERE NOT TO BE REMOVED, SHALL BE REPAIRED OR REPLACED, EVEN IF THE DAMAGE OR DISPLACEMENT OCCURRED PRIOR TO ANY WORK PERFORMED BY THE CONTRACTOR. CONTRACTOR SHALL DOCUMENT CONDITION VIA PHOTOGRAPHS PRIOR TO THE START OF CONSTRUCTION.
- 20. THE CONTRACTOR SHALL CONTROL DUST BY WATERING EXPOSED SURFACES AS NEEDED. INCREASED WATERING SHALL BE REQUIRED WHEN WIND SPEEDS EXCEED 10 MPH OR WHEN DIRECTED BY THE CITY.
- 21. NO PERSON SHALL, WHEN HAULING ANY EARTH, SAND, GRAVEL, STONE, DEBRIS, PAPER, OR ANY OTHER SUBSTANCE OVER ANY PUBLIC STREETS OR OTHER PUBLIC PLACE, ALLOW MATERIAL TO BLOW OR SPILL OVER AND UPON SAID PUBLIC OR ADJACENT PRIVATE PROPERTY. ALL LOADS LEAVING THE SITE SHALL BE COVERED.
- 22. THE CONTRACTOR SHALL PROVIDE A STABILIZED CONSTRUCTION ENTRANCE/EXIT TO PREVENT THE TRACKING OF SOIL, DUST, MUD, OR CONSTRUCTION DEBRIS ONTO PUBLIC STREETS.
- 23. MUD TRACKED ONTO STREETS OR ADJACENT PROPERTIES SHALL BE REMOVED IMMEDIATELY, STREET SHALL BE SWEPT WITH A POWER SWEEPER (NOT PRESSURE WASHED) AS DIRECTED BY THE CITY.
- 24. A DISPOSAL SITE FOR ANY OFF-SITE HAUL OF DIRT MATERIALS SHALL BE APPROVED BY THE CITY PRIOR TO APPROVAL OF THE GRADING PERMIT. THE OFF-SITE HAUL ROUTE FOR EXCESS DIRT OR CONSTRUCTION DEBRIS IS SUBJECT TO APPROVAL OF THE CITY ENGINEER.
- 25. EXCAVATIONS SHALL BE ADEQUATELY SHORED, BRACED AND SHEETED SO THAT THE EARTH WILL NOT SLIDE OR SETTLE AND SO THAT ALL EXISTING IMPROVEMENTS OF ANY KIND WILL BE FULLY PROTECTED FROM DAMAGE. ANY DAMAGE RESULTING FROM A LACK OF ADEQUATE SHORING, BRACING AND SHEETING, SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR AND THE CONTRACTOR SHALL EFFECT NECESSARY REPAIRS OR RECONSTRUCTION AT HIS OWN EXPENSE. WHERE THE EXCAVATION FOR A TRENCH, STRUCTURE AND/OR BORING OR JACKING PIT IS FIVE FEET OR MORE IN DEPTH THE CONTRACTOR SHALL CONFORM TO THE APPLICABLE CONSTRUCTION SAFETY ORDERS OF THE DIVISION OF INDUSTRIAL SAFETY OF THE STATE OF CALIFORNIA.
- 26. ALL TRENCHES IN EXISTING CITY STREETS SHALL BE BACKFILLED AND PAVED WITHIN 24 HOURS OF EXCAVATION. STEEL PLATES MAY BE PLACED OVER UNBACKFILLED TRENCHES BEYOND THE 24 HOUR PERIOD WITH THE SPECIFIC APPROVAL OF THE CITY ENGINEER.
- 27. ALL REINFORCED CONCRETE PIPE SHALL BE CLASS III OR BETTER, UNLESS OTHERWISE NOTED.
- 28. OPERATION OF VALVES ON THE WATER SYSTEM SHALL BE PERFORMED BY WATER PURVEYOR JURISDICTIONAL PERSONNEL ONLY.

SITE IMPROVEMENT PLANS

GOLDEN HILLS PLAZA
FOR
REGENCY CENTERS
PASO ROBLES,
CALIFORNIA

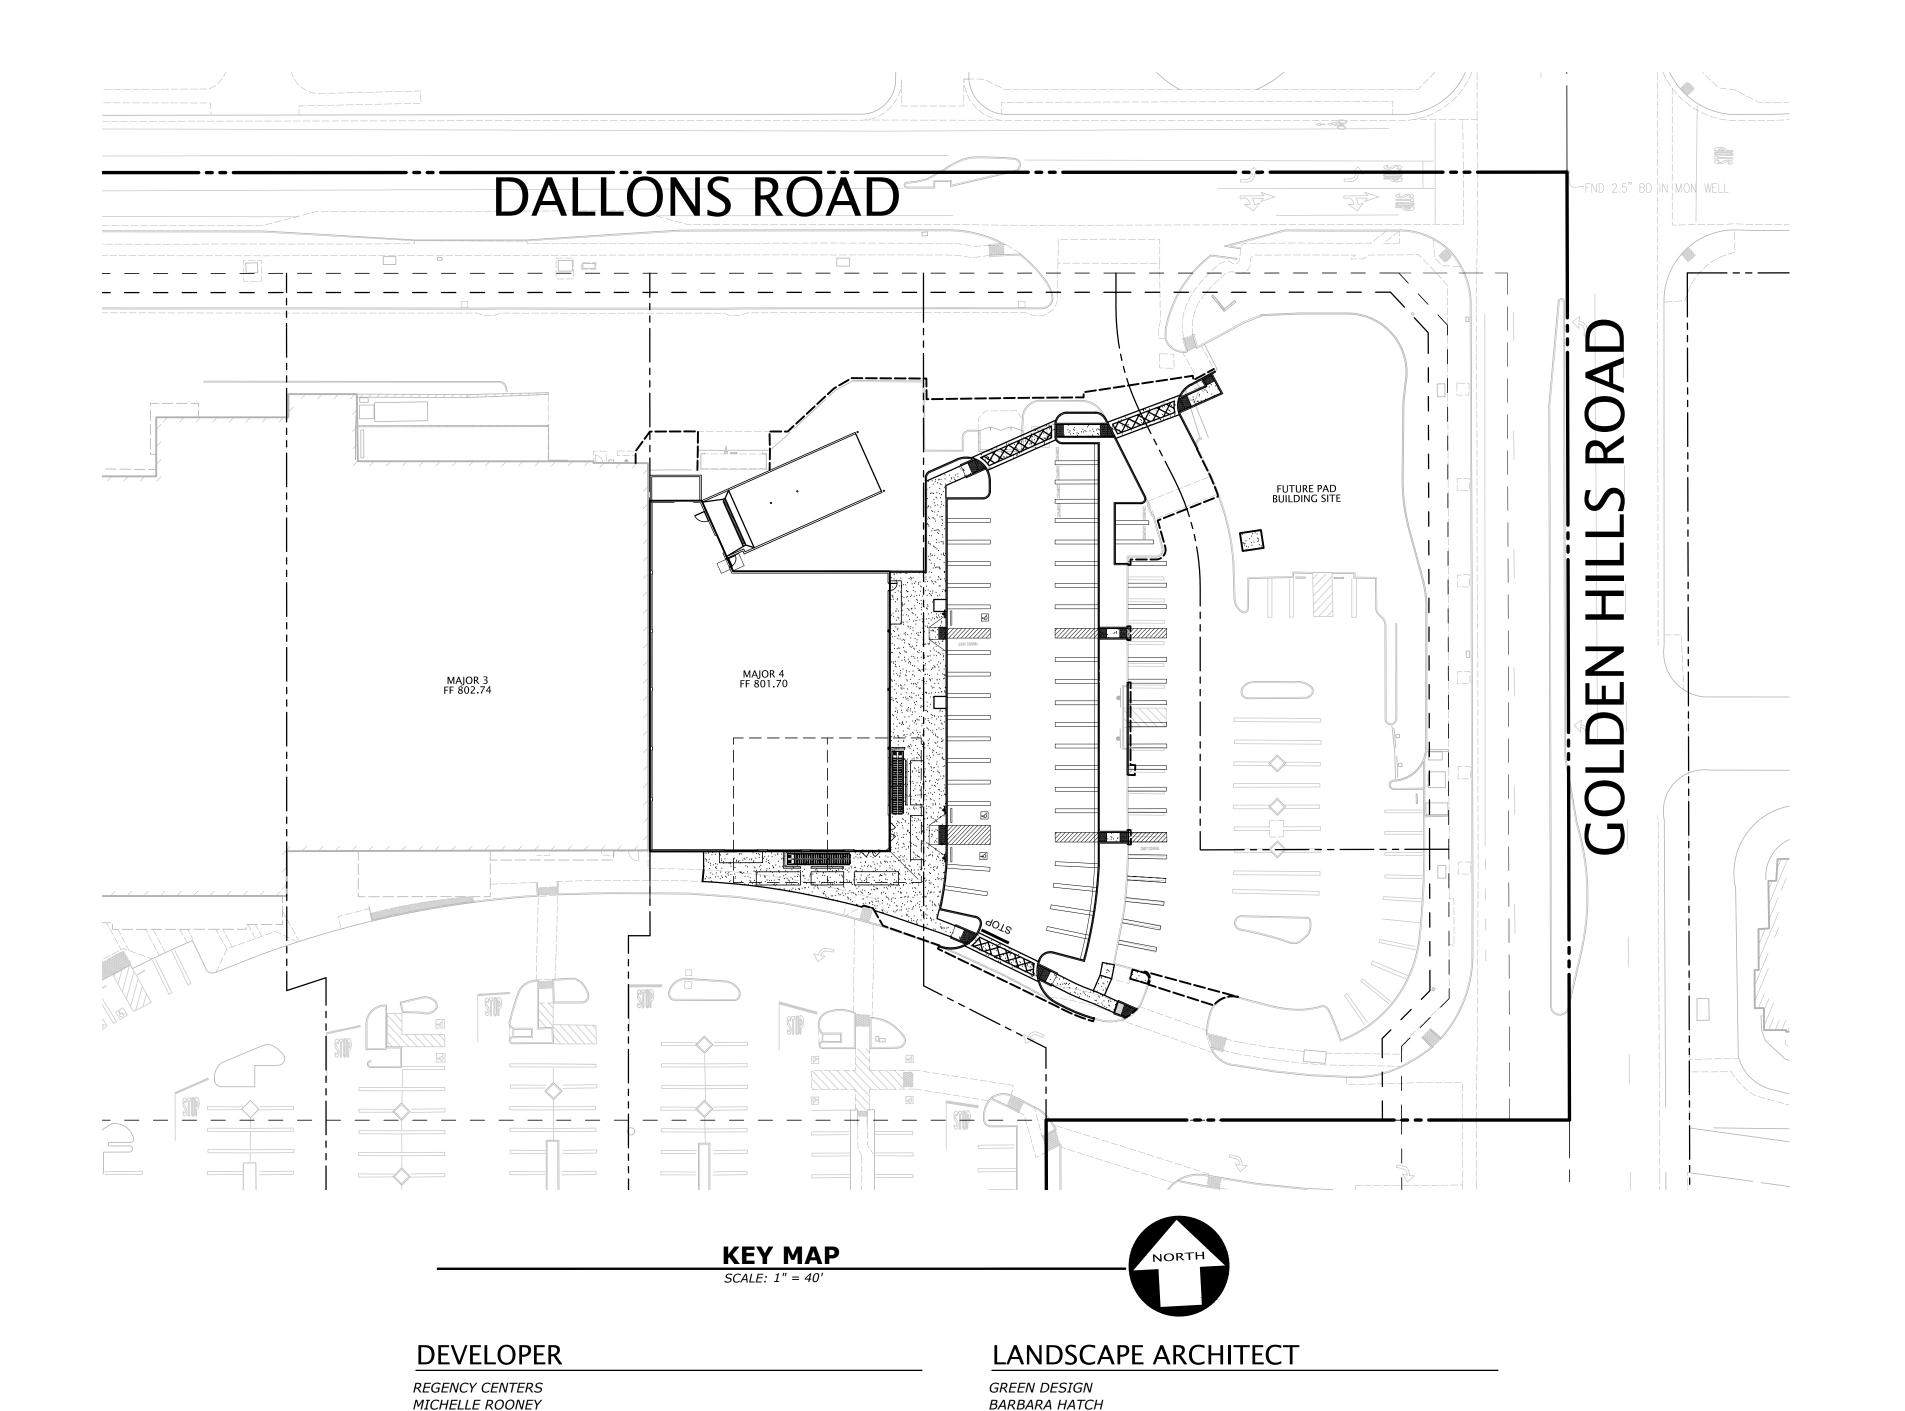

1464 POPINJAY DRIVE

RENO, NEVADA 89509

ARCHITECT

BENICIA, CA 94510

MARK THIEME ARCHITECT, INC. 77 SOLANO SQUARE, #114

775-846-1997

MARK THIEME

707-590-3033

1777 BOTELHO DRIVE, SUITE 200

KIER & WRIGHT CIVIL ENGINEERS & SURVEYORS, INC.

WALNUT CREEK, CA 94596

CIVIL ENGINEER


250 CHERRY LANE, SUITE 208

ATTN: STEPHEN STROUP

MANTECA, CA 95337

209-328-1123


925-279-1801

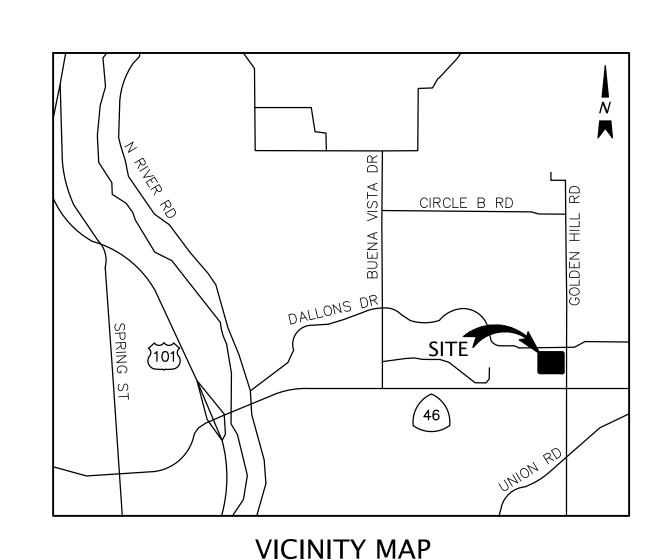

SHEET INDEX

NOT TO SCALE

#	CIVIL	DESCRIPTION
1	C1.0	COVER
2	C2.0	TOPOGRAPHIC SURVEY
3	C3.0	PRELIMINARY DEMOLITION PLAN
4	C4.1	PRELIMINARY PAVING AND HORIZONTAL CONTROL PLAN
5	C4.2	PRELIMINARY TYPICAL SECTIONS
6	C5.0	GRADING AND DRAINAGE PLAN
7	C6.0	PRELIMINARY UTILITY PLAN
8	C7.0	PRELIMINARY EROSION CONTROL PLAN

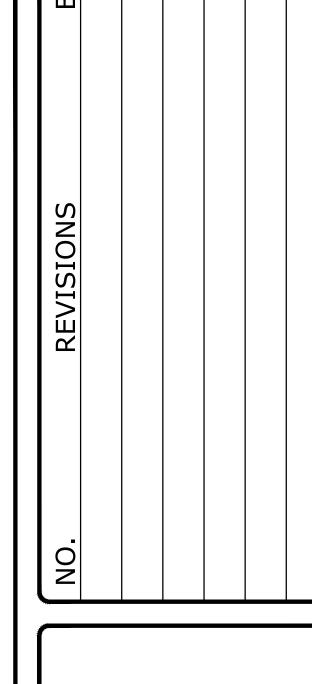

2850 Col Livermore

人人

IMPROVEMENT PLANS
OF
GOLDEN HILLS PLAZA- MAJOR 4
FOR
REGENCY CENTERS
PASO ROBLES, CALIFONIA


ORIGINAL ISSUE
DATE: 02/07/2025


CURRENT SET ISSUE
DATE: 02/07/2025

PERMIT SET / CONSTRUCTION
DATE: {XX XX XXXX}

C1.0

NOT FOR CONSTRUCTION

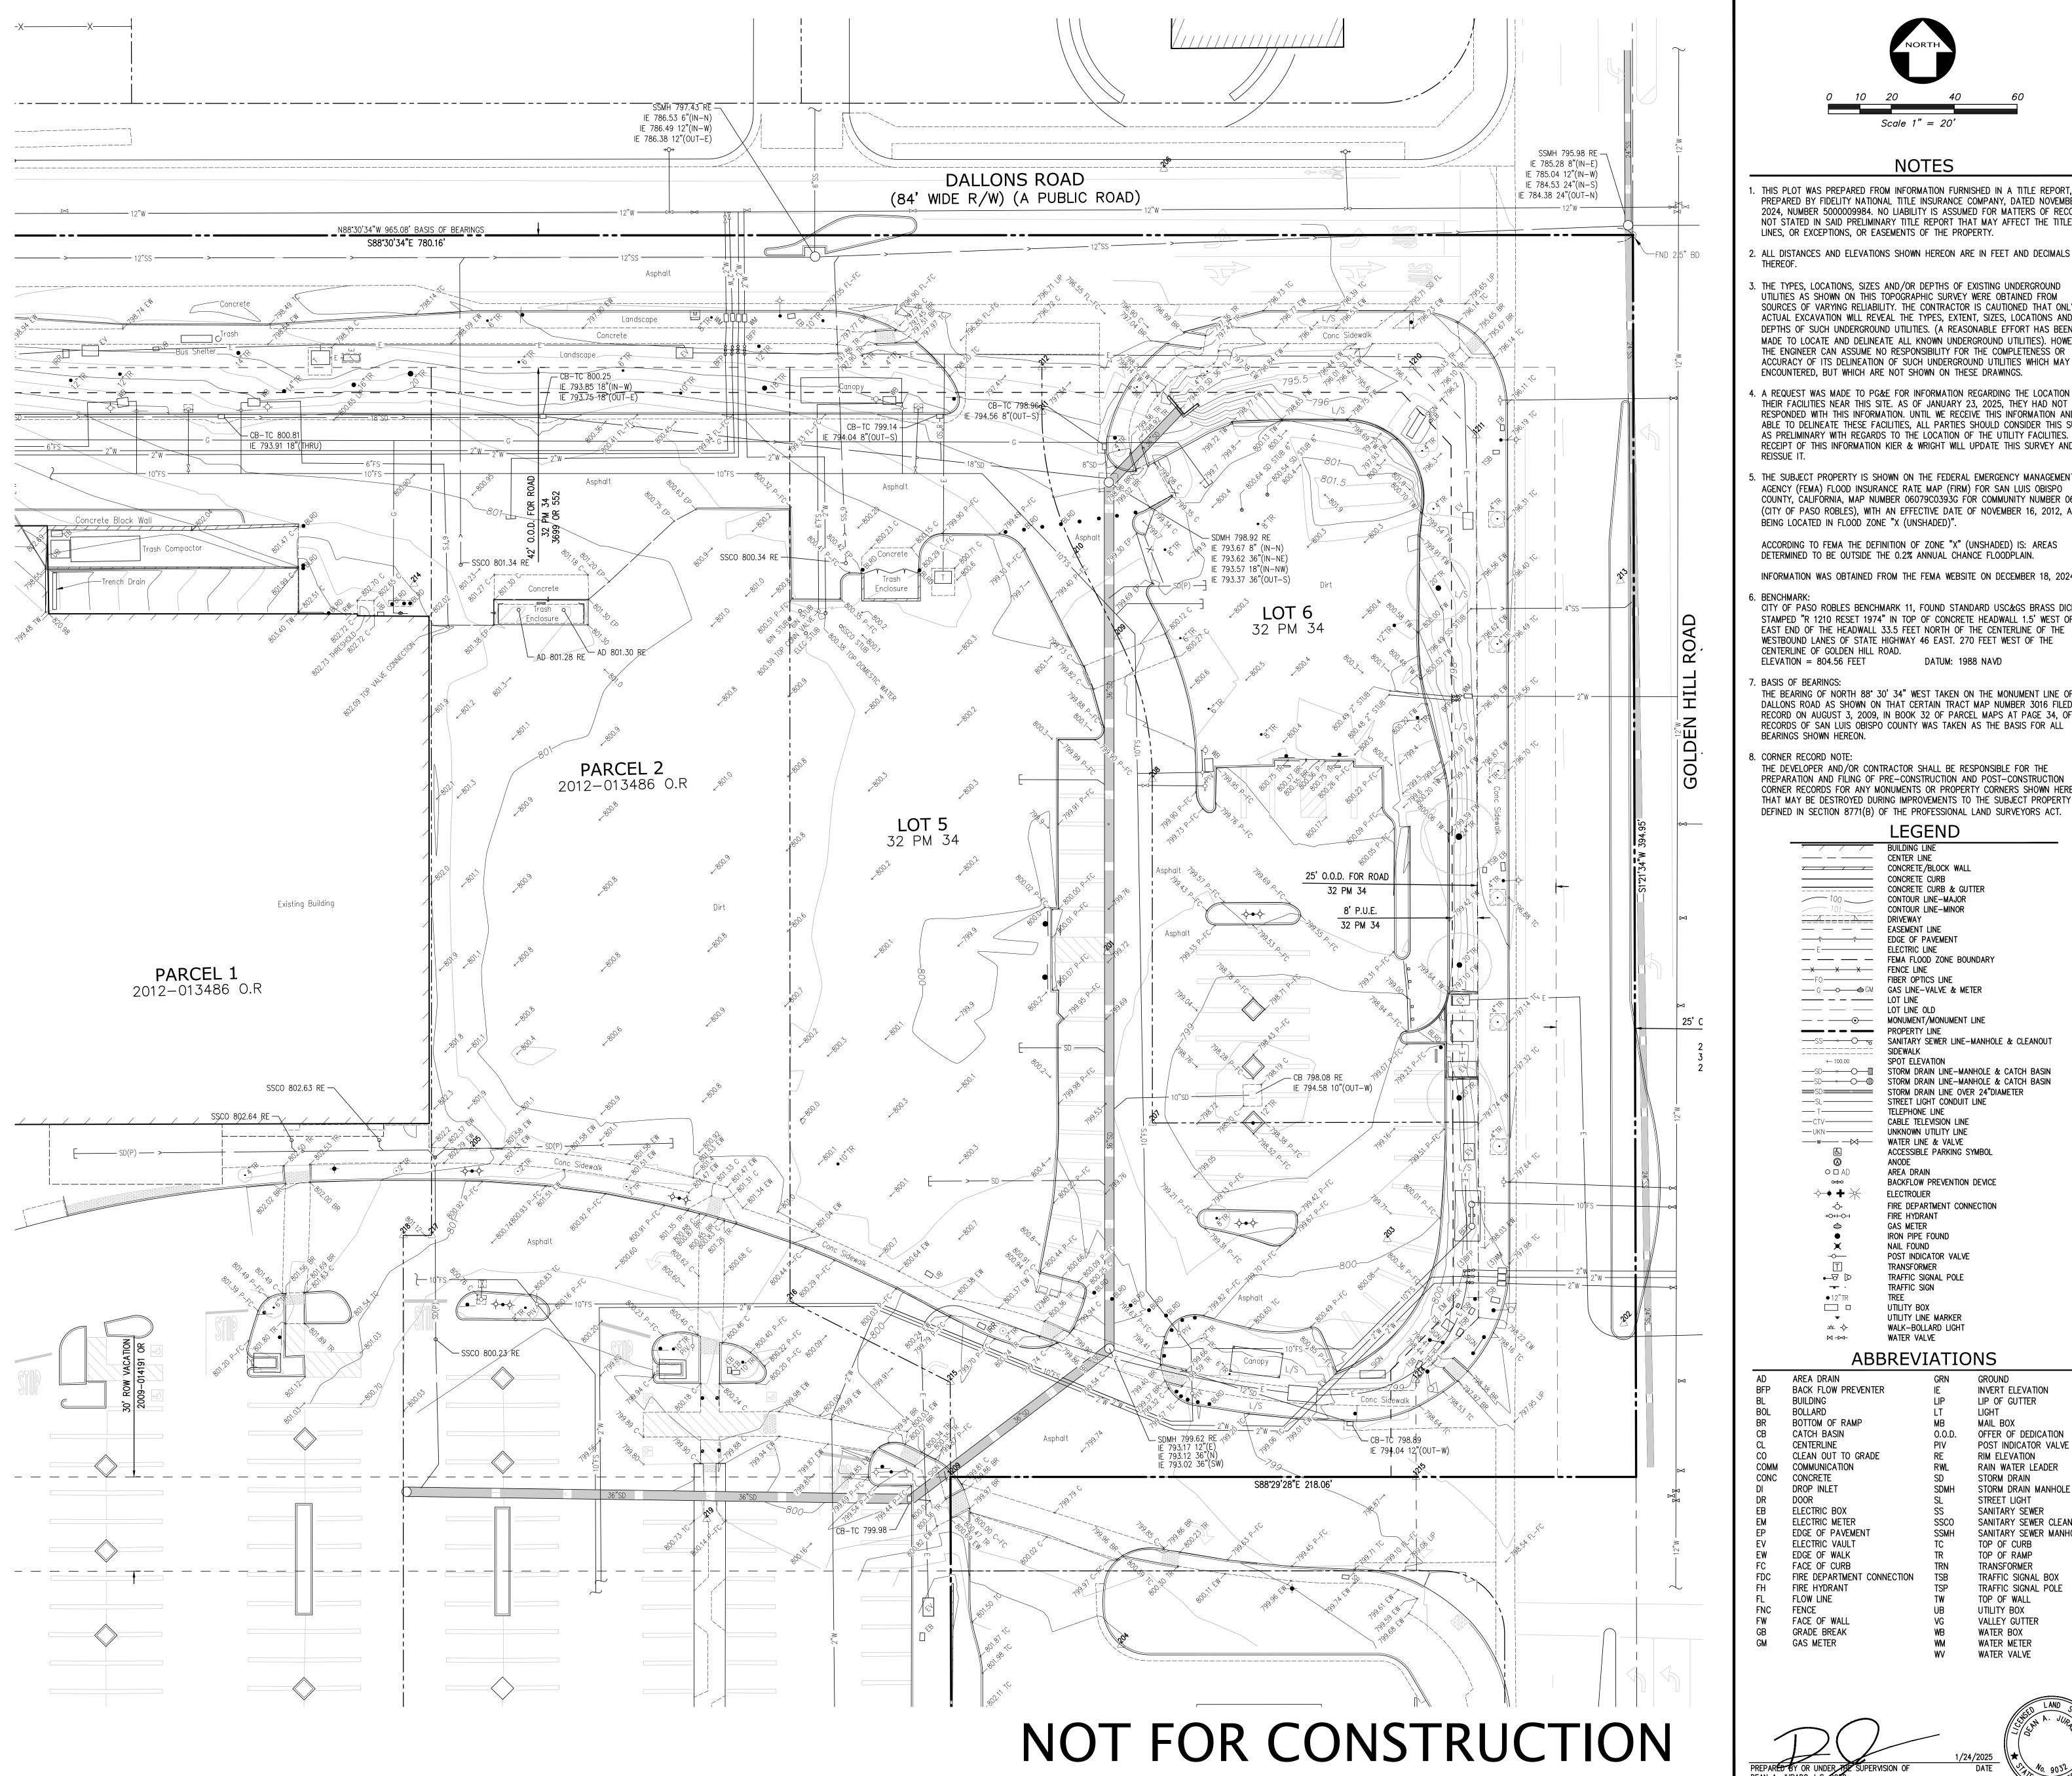

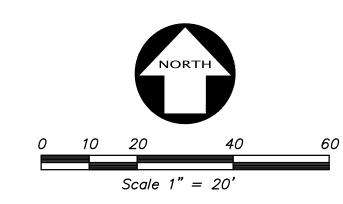

- PREPARED BY FIDELITY NATIONAL TITLE INSURANCE COMPANY, DATED NOVEMBER 14 2024, NUMBER 5000009984. NO LIABILITY IS ASSUMED FOR MATTERS OF RECORD NOT STATED IN SAID PRELIMINARY TITLE REPORT THAT MAY AFFECT THE TITLE LINES, OR EXCEPTIONS, OR EASEMENTS OF THE PROPERTY.
- 2. ALL DISTANCES AND ELEVATIONS SHOWN HEREON ARE IN FEET AND DECIMALS THEREOF.
- 3. THE TYPES, LOCATIONS, SIZES AND/OR DEPTHS OF EXISTING UNDERGROUND UTILITIES AS SHOWN ON THIS TOPOGRAPHIC SURVEY WERE OBTAINED FROM SOURCES OF VARYING RELIABILITY. THE CONTRACTOR IS CAUTIONED THAT ONLY ACTUAL EXCAVATION WILL REVEAL THE TYPES, EXTENT, SIZES, LOCATIONS AND DEPTHS OF SUCH UNDERGROUND UTILITIES. (A REASONABLE EFFORT HAS BEEN MADE TO LOCATE AND DELINEATE ALL KNOWN UNDERGROUND UTILITIES). HOWEVER, THE ENGINEER CAN ASSUME NO RESPONSIBILITY FOR THE COMPLETENESS OR ACCURACY OF ITS DELINEATION OF SUCH UNDERGROUND UTILITIES WHICH MAY BE ENCOUNTERED, BUT WHICH ARE NOT SHOWN ON THESE DRAWINGS.
- 4. A REQUEST WAS MADE TO PG&E FOR INFORMATION REGARDING THE LOCATION OF THEIR FACILITIES NEAR THIS SITE. AS OF JANUARY 23, 2025, THEY HAD NOT RESPONDED WITH THIS INFORMATION. UNTIL WE RECEIVE THIS INFORMATION AND ARE ABLE TO DELINEATE THESE FACILITIES, ALL PARTIES SHOULD CONSIDER THIS SURVEY AS PRELIMINARY WITH REGARDS TO THE LOCATION OF THE UTILITY FACILITIES. UPON RECEIPT OF THIS INFORMATION KIER & WRIGHT WILL UPDATE THIS SURVEY AND
- 5. THE SUBJECT PROPERTY IS SHOWN ON THE FEDERAL EMERGENCY MANAGEMENT AGENCY (FEMA) FLOOD INSURANCE RATE MAP (FIRM) FOR SAN LUIS OBISPO COUNTY, CALIFORNIA, MAP NUMBER 06079C0393G FOR COMMUNITY NUMBER 060308 (CITY OF PASO ROBLES), WITH AN EFFECTIVE DATE OF NOVEMBER 16, 2012, AS BEING LOCATED IN FLOOD ZONE "X (UNSHADED)".
- ACCORDING TO FEMA THE DEFINITION OF ZONE "X" (UNSHADED) IS: AREAS DETERMINED TO BE OUTSIDE THE 0.2% ANNUAL CHANCE FLOODPLAIN.
- INFORMATION WAS OBTAINED FROM THE FEMA WEBSITE ON DECEMBER 18, 2024.
- CITY OF PASO ROBLES BENCHMARK 11, FOUND STANDARD USC&GS BRASS DICK STAMPED "R 1210 RESET 1974" IN TOP OF CONCRETE HEADWALL 1.5' WEST OF THE EAST END OF THE HEADWALL 33.5 FEET NORTH OF THE CENTERLINE OF THE WESTBOUND LANES OF STATE HIGHWAY 46 EAST. 270 FEET WEST OF THE CENTERLINE OF GOLDEN HILL ROAD.
- ELEVATION = 804.56 FEETDATUM: 1988 NAVD
- THE BEARING OF NORTH 88° 30' 34" WEST TAKEN ON THE MONUMENT LINE OF DALLONS ROAD AS SHOWN ON THAT CERTAIN TRACT MAP NUMBER 3016 FILED FOR RECORD ON AUGUST 3, 2009, IN BOOK 32 OF PARCEL MAPS AT PAGE 34, OFFICIAL RECORDS OF SAN LUIS OBISPO COUNTY WAS TAKEN AS THE BASIS FOR ALL BEARINGS SHOWN HEREON.
- THE DEVELOPER AND/OR CONTRACTOR SHALL BE RESPONSIBLE FOR THE PREPARATION AND FILING OF PRE-CONSTRUCTION AND POST-CONSTRUCTION CORNER RECORDS FOR ANY MONUMENTS OR PROPERTY CORNERS SHOWN HEREON THAT MAY BE DESTROYED DURING IMPROVEMENTS TO THE SUBJECT PROPERTY AS DEFINED IN SECTION 8771(B) OF THE PROFESSIONAL LAND SURVEYORS ACT.


EFINED IN SECTION 8771(B)	OF THE PROFESSIONAL LAND SURVEYORS ACT.
	LEGEND
	BUILDING LINE
	CENTER LINE
	CONCRETE/BLOCK WALL
	CONCRETE CURB
	CONCRETE CURB & GUTTER
100	CONTOUR LINE-MAJOR
101	CONTOUR LINE-MINOR
	DRIVEWAY
	EASEMENT LINE
γγ	EDGE OF PAVEMENT
— E———	ELECTRIC LINE
	FEMA FLOOD ZONE BOUNDARY
	FENCE LINE
—-F0	FIBER OPTICS LINE
— G — ◆ GM	GAS LINE-VALVE & METER
	LOT LINE
	LOT LINE OLD
<u> </u>	MONUMENT/MONUMENT LINE
	PROPERTY LINE
—SS—— •	SANITARY SEWER LINE-MANHOLE & CLEANOUT
	SIDEWALK
+ 100.00	SPOT ELEVATION
\longrightarrow SD \longrightarrow	STORM DRAIN LINE-MANHOLE & CATCH BASIN
SDO	STORM DRAIN LINE-MANHOLE & CATCH BASIN
SD=====	STORM DRAIN LINE OVER 24"DIAMETER
——SL ———	STREET LIGHT CONDUIT LINE
— T——	TELEPHONE LINE
CTV	CABLE TELEVISION LINE
——UKN———	UNKNOWN UTILITY LINE
——w——_ ——	WATER LINE & VALVE
<u>&</u>	ACCESSIBLE PARKING SYMBOL
	ANODE
	AREA DRAIN
	BACKFLOW PREVENTION DEVICE
→ → *	ELECTROLIER
ьĢ	FIRE DEPARTMENT CONNECTION
+0+1-0-1	FIRE HYDRANT
\diamond	GAS METER
•	IRON PIPE FOUND
×	NAIL FOUND
<u> </u>	POST INDICATOR VALVE
┰	TRANSFORMER

⋈ -⋈-	WALK-BOLLARD LIGHT
菻	WATER VALVE
AE	BBREVIATION


UTILITY BOX UTILITY LINE MARKER

TRAFFIC SIGNAL POLE


ABBREVIATIONS								
AD	AREA DRAIN	GRN	GROUND					
BFP	BACK FLOW PREVENTER	ΙE	INVERT ELEVATION					
BL	BUILDING	LIP	LIP OF GUTTER					
BOL	BOLLARD	LT	LIGHT					
BR	BOTTOM OF RAMP	MB	MAIL BOX					
CB	CATCH BASIN	0.0.D.	OFFER OF DEDICATION					
CL	CENTERLINE	PIV	POST INDICATOR VALVE					
CO	CLEAN OUT TO GRADE	RE	RIM ELEVATION					
COMM	COMMUNICATION	RWL	RAIN WATER LEADER					
CONC	CONCRETE	SD	STORM DRAIN					
DI	DROP INLET	SDMH	STORM DRAIN MANHOLE					
DR	DOOR	SL	STREET LIGHT					
EB	ELECTRIC BOX	SS	SANITARY SEWER					
EM	ELECTRIC METER	SSC0						
EP	EDGE OF PAVEMENT	SSMH	SANITARY SEWER MANHOLE					
EV		TC	TOP OF CURB					
EW		TR	TOP OF RAMP					
FC	FACE OF CURB	TRN	TRANSFORMER					
FDC	FIRE DEPARTMENT CONNECTION	TSB	TRAFFIC SIGNAL BOX					
FH	FIRE HYDRANT	TSP	TRAFFIC SIGNAL POLE					
FL	FLOW LINE	TW	TOP OF WALL					
FNC	FENCE	UB	UTILITY BOX					
FW	FACE OF WALL	VG	VALLEY GUTTER					
GB	GRADE BREAK	WB	WATER BOX					
GM	GAS METER	WM	WATER METER					
		WV	WATER VALVE					

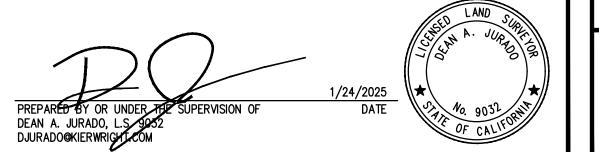



KIER + WRIGHT PROJECT NUMBER: A24172-1

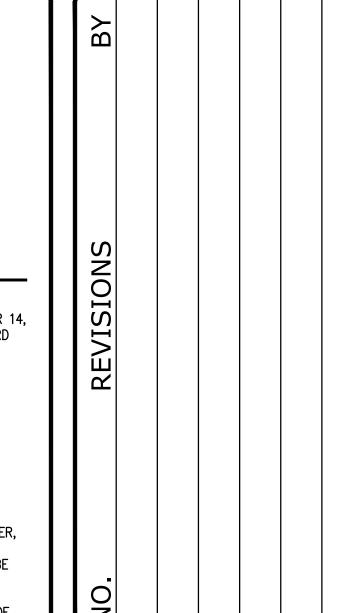



DATE: {XX.XX.XXXX}

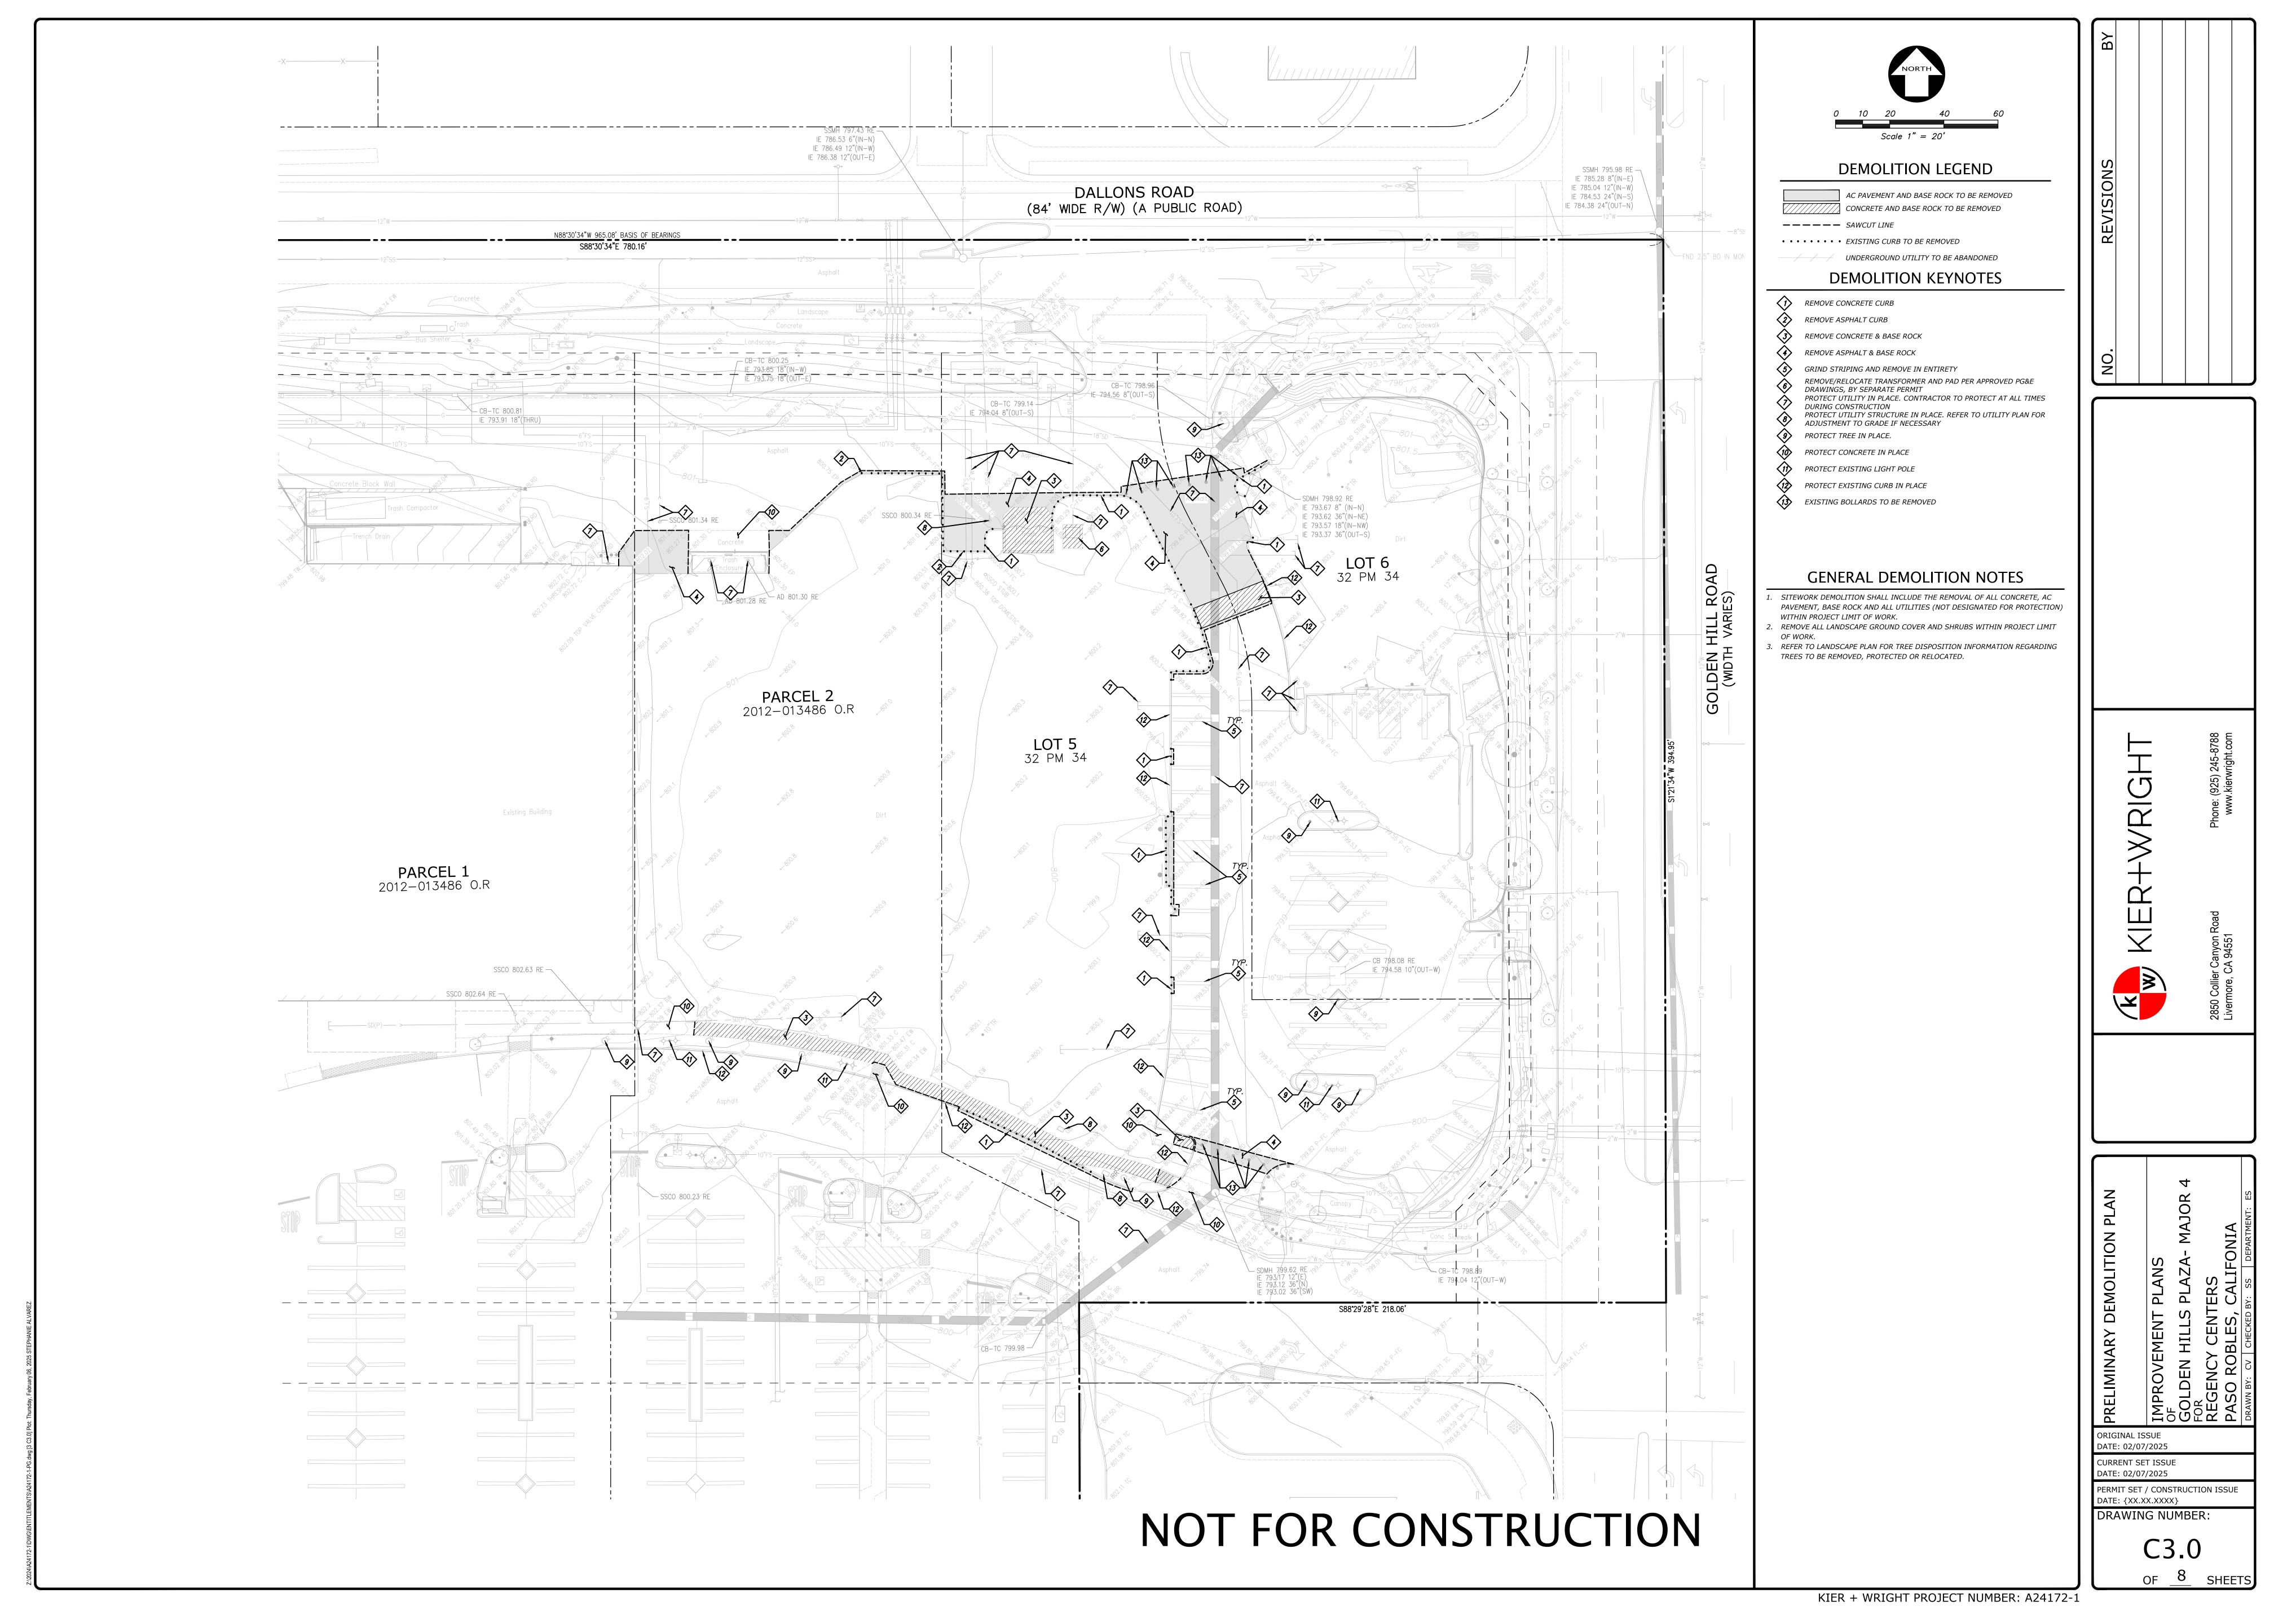

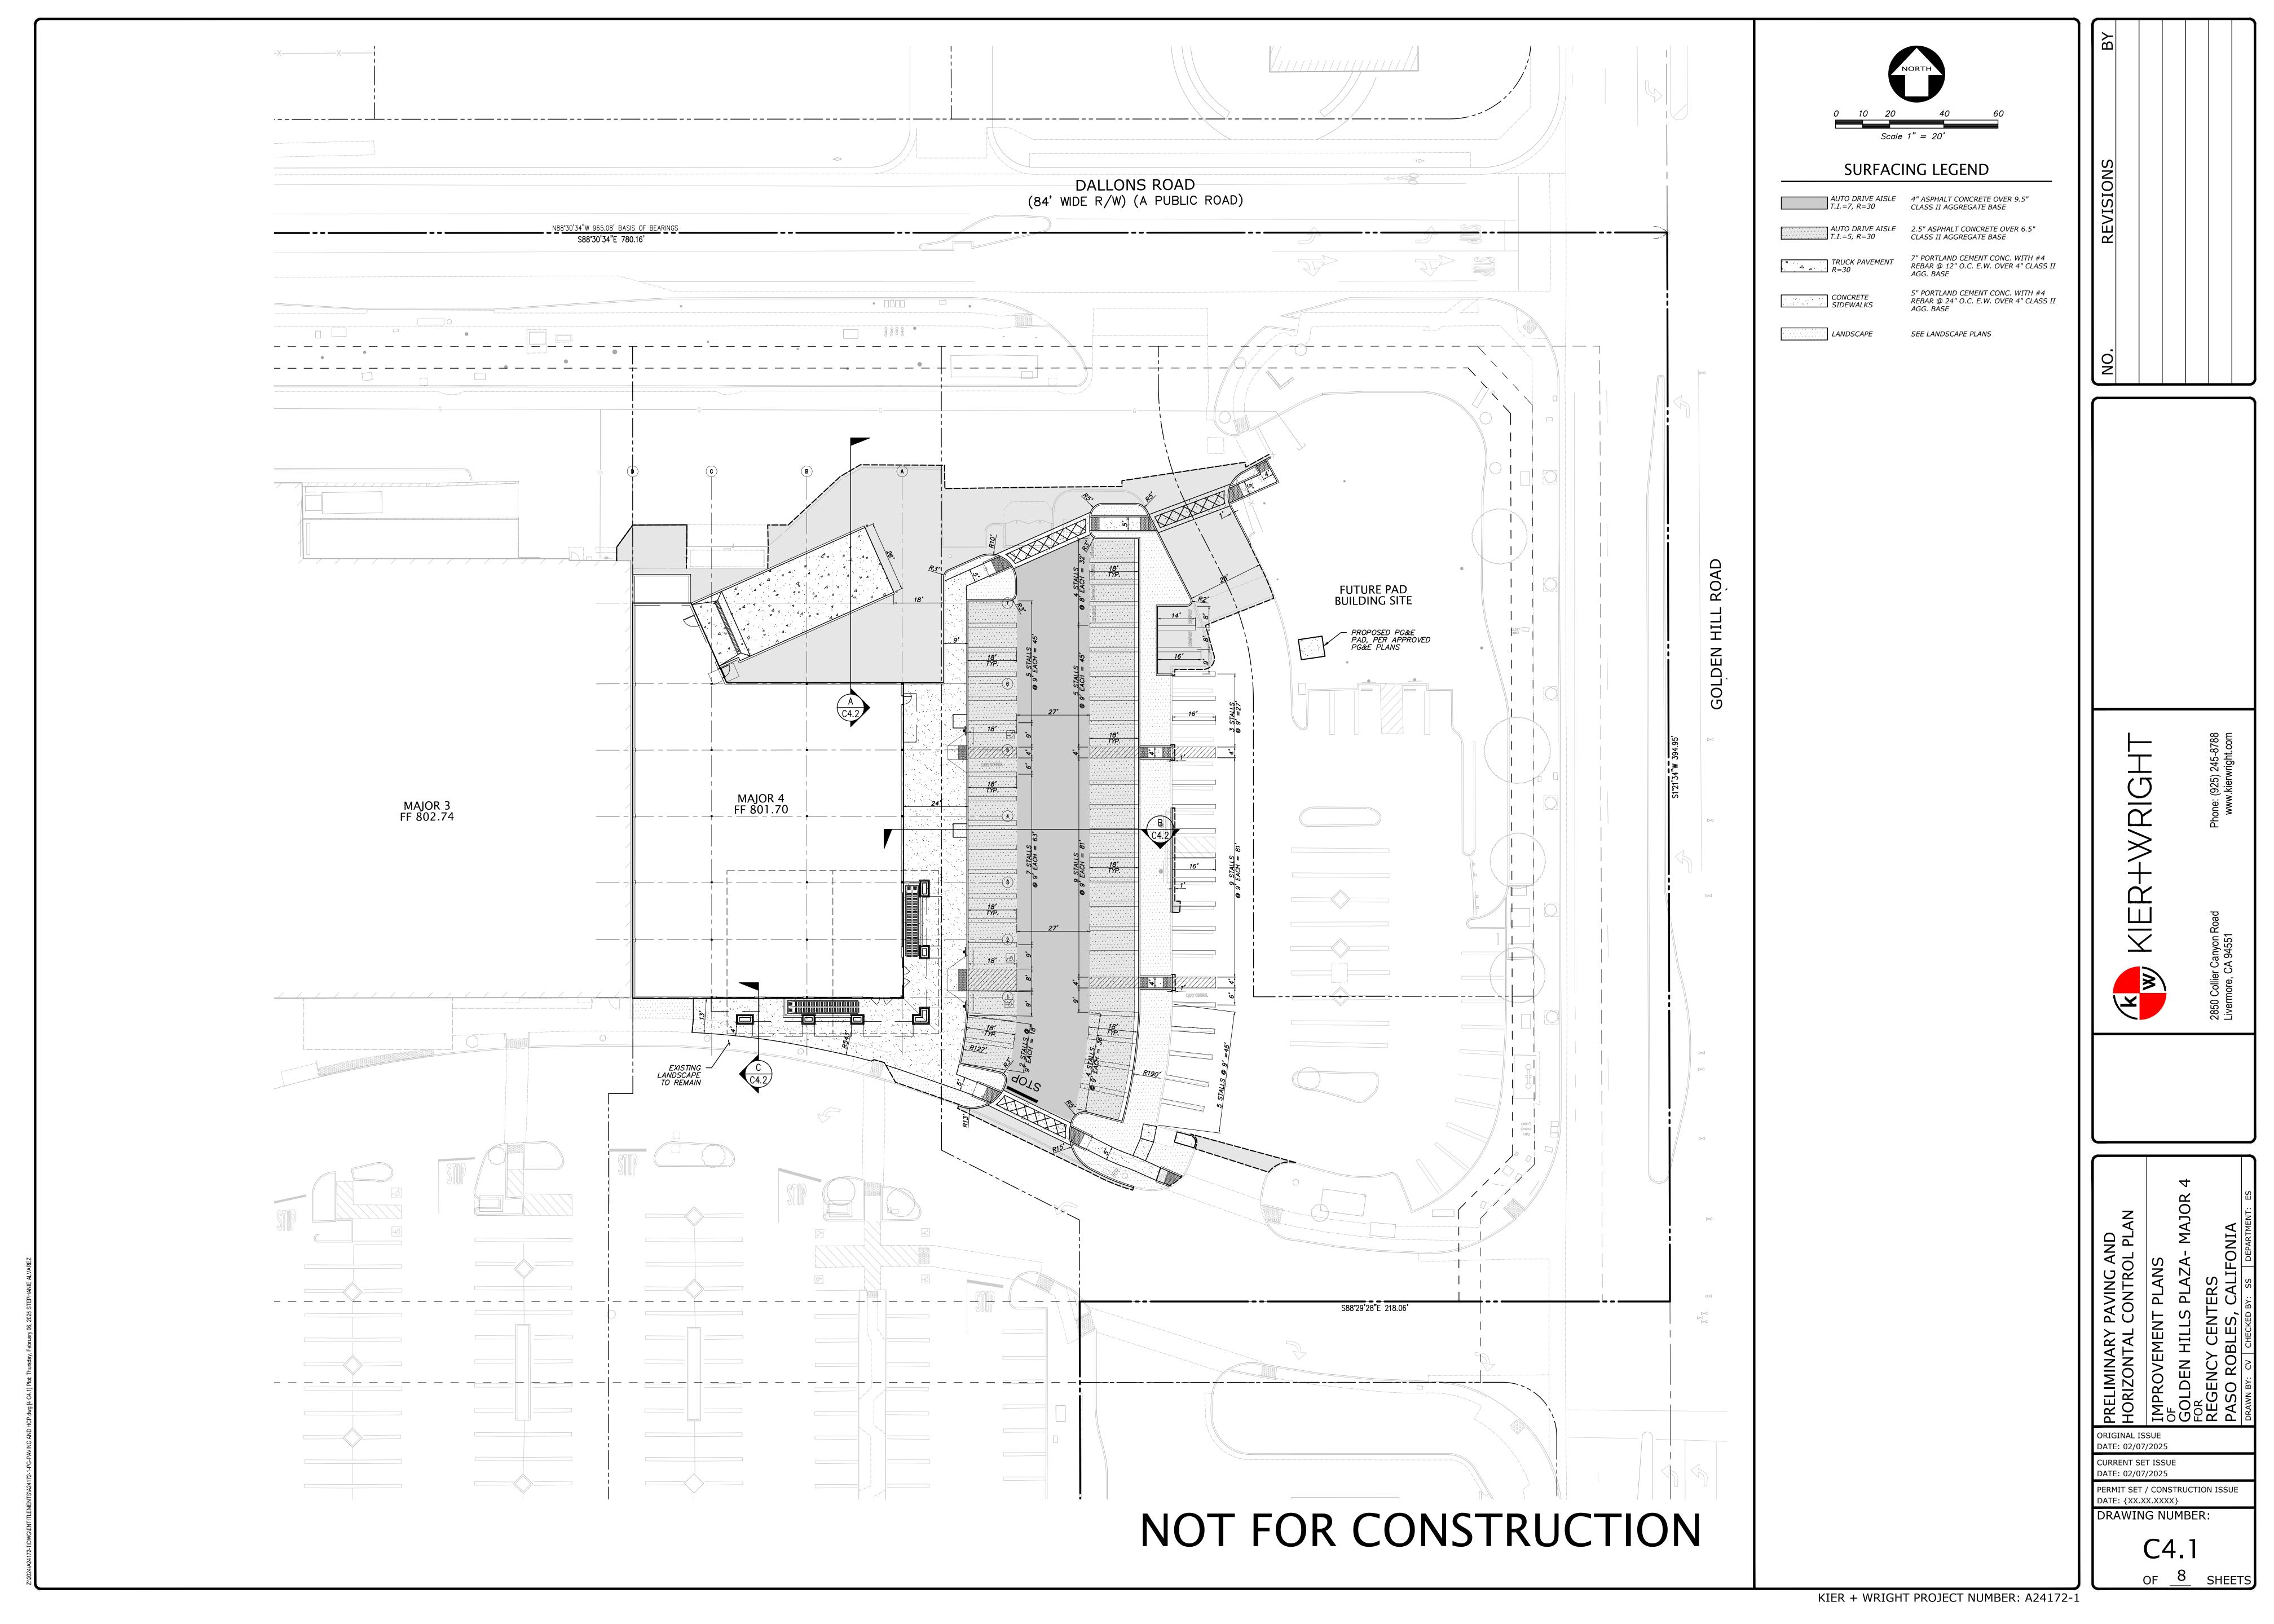

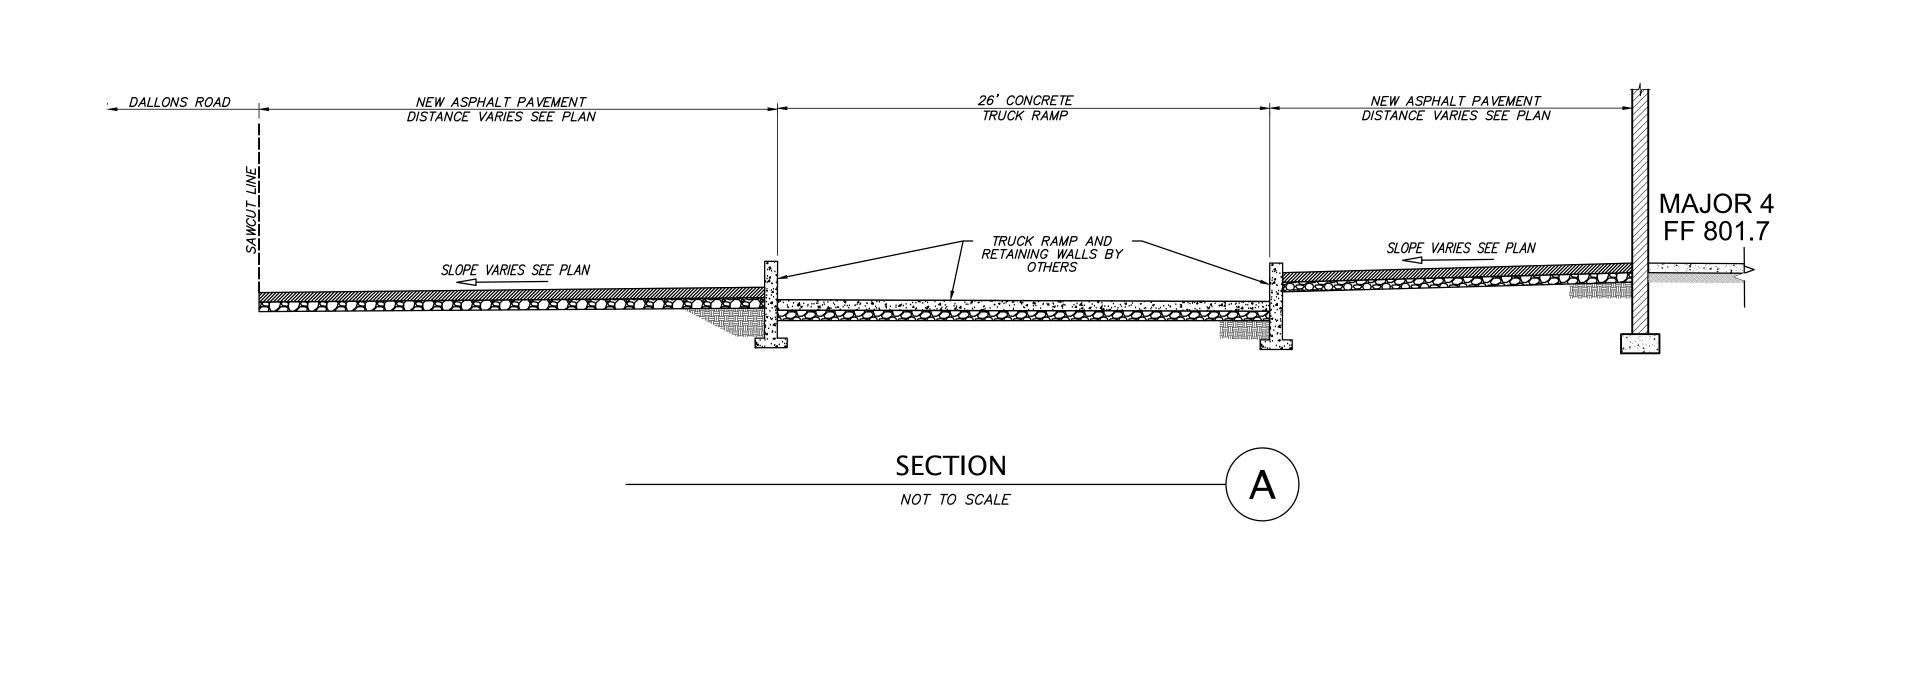

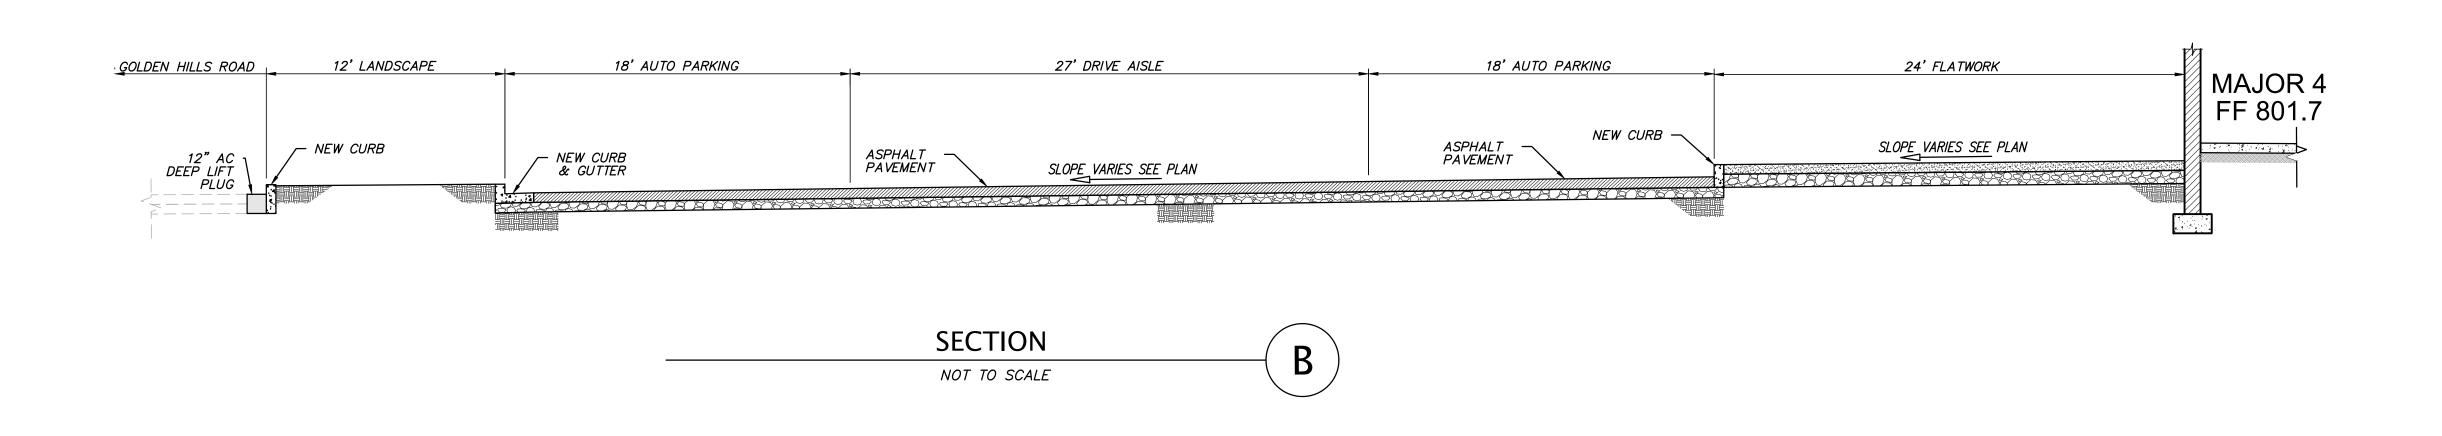

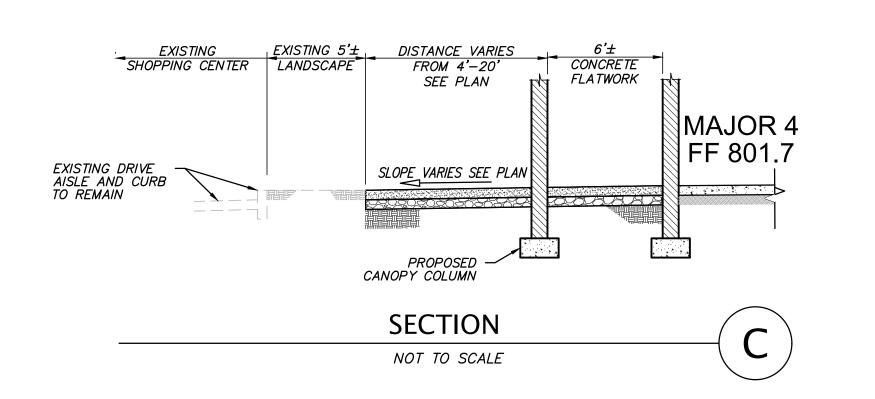

NOT FOR CONSTRUCTION

NO. REVISIONS BY

KIER+WRIGHT


ELIMINARY TYPICAL SECTIONS
IPROVEMENT PLANS
SLDEN HILLS PLAZA- MAJOR 4
EGENCY CENTERS
ASO ROBLES, CALIFONIA

ORIGINAL ISSUE DATE: 02/07/2025

CURRENT SET ISSUE
DATE: 02/07/2025
PERMIT SET / CONSTRUCT

RAWING NUMBER

C4.Z

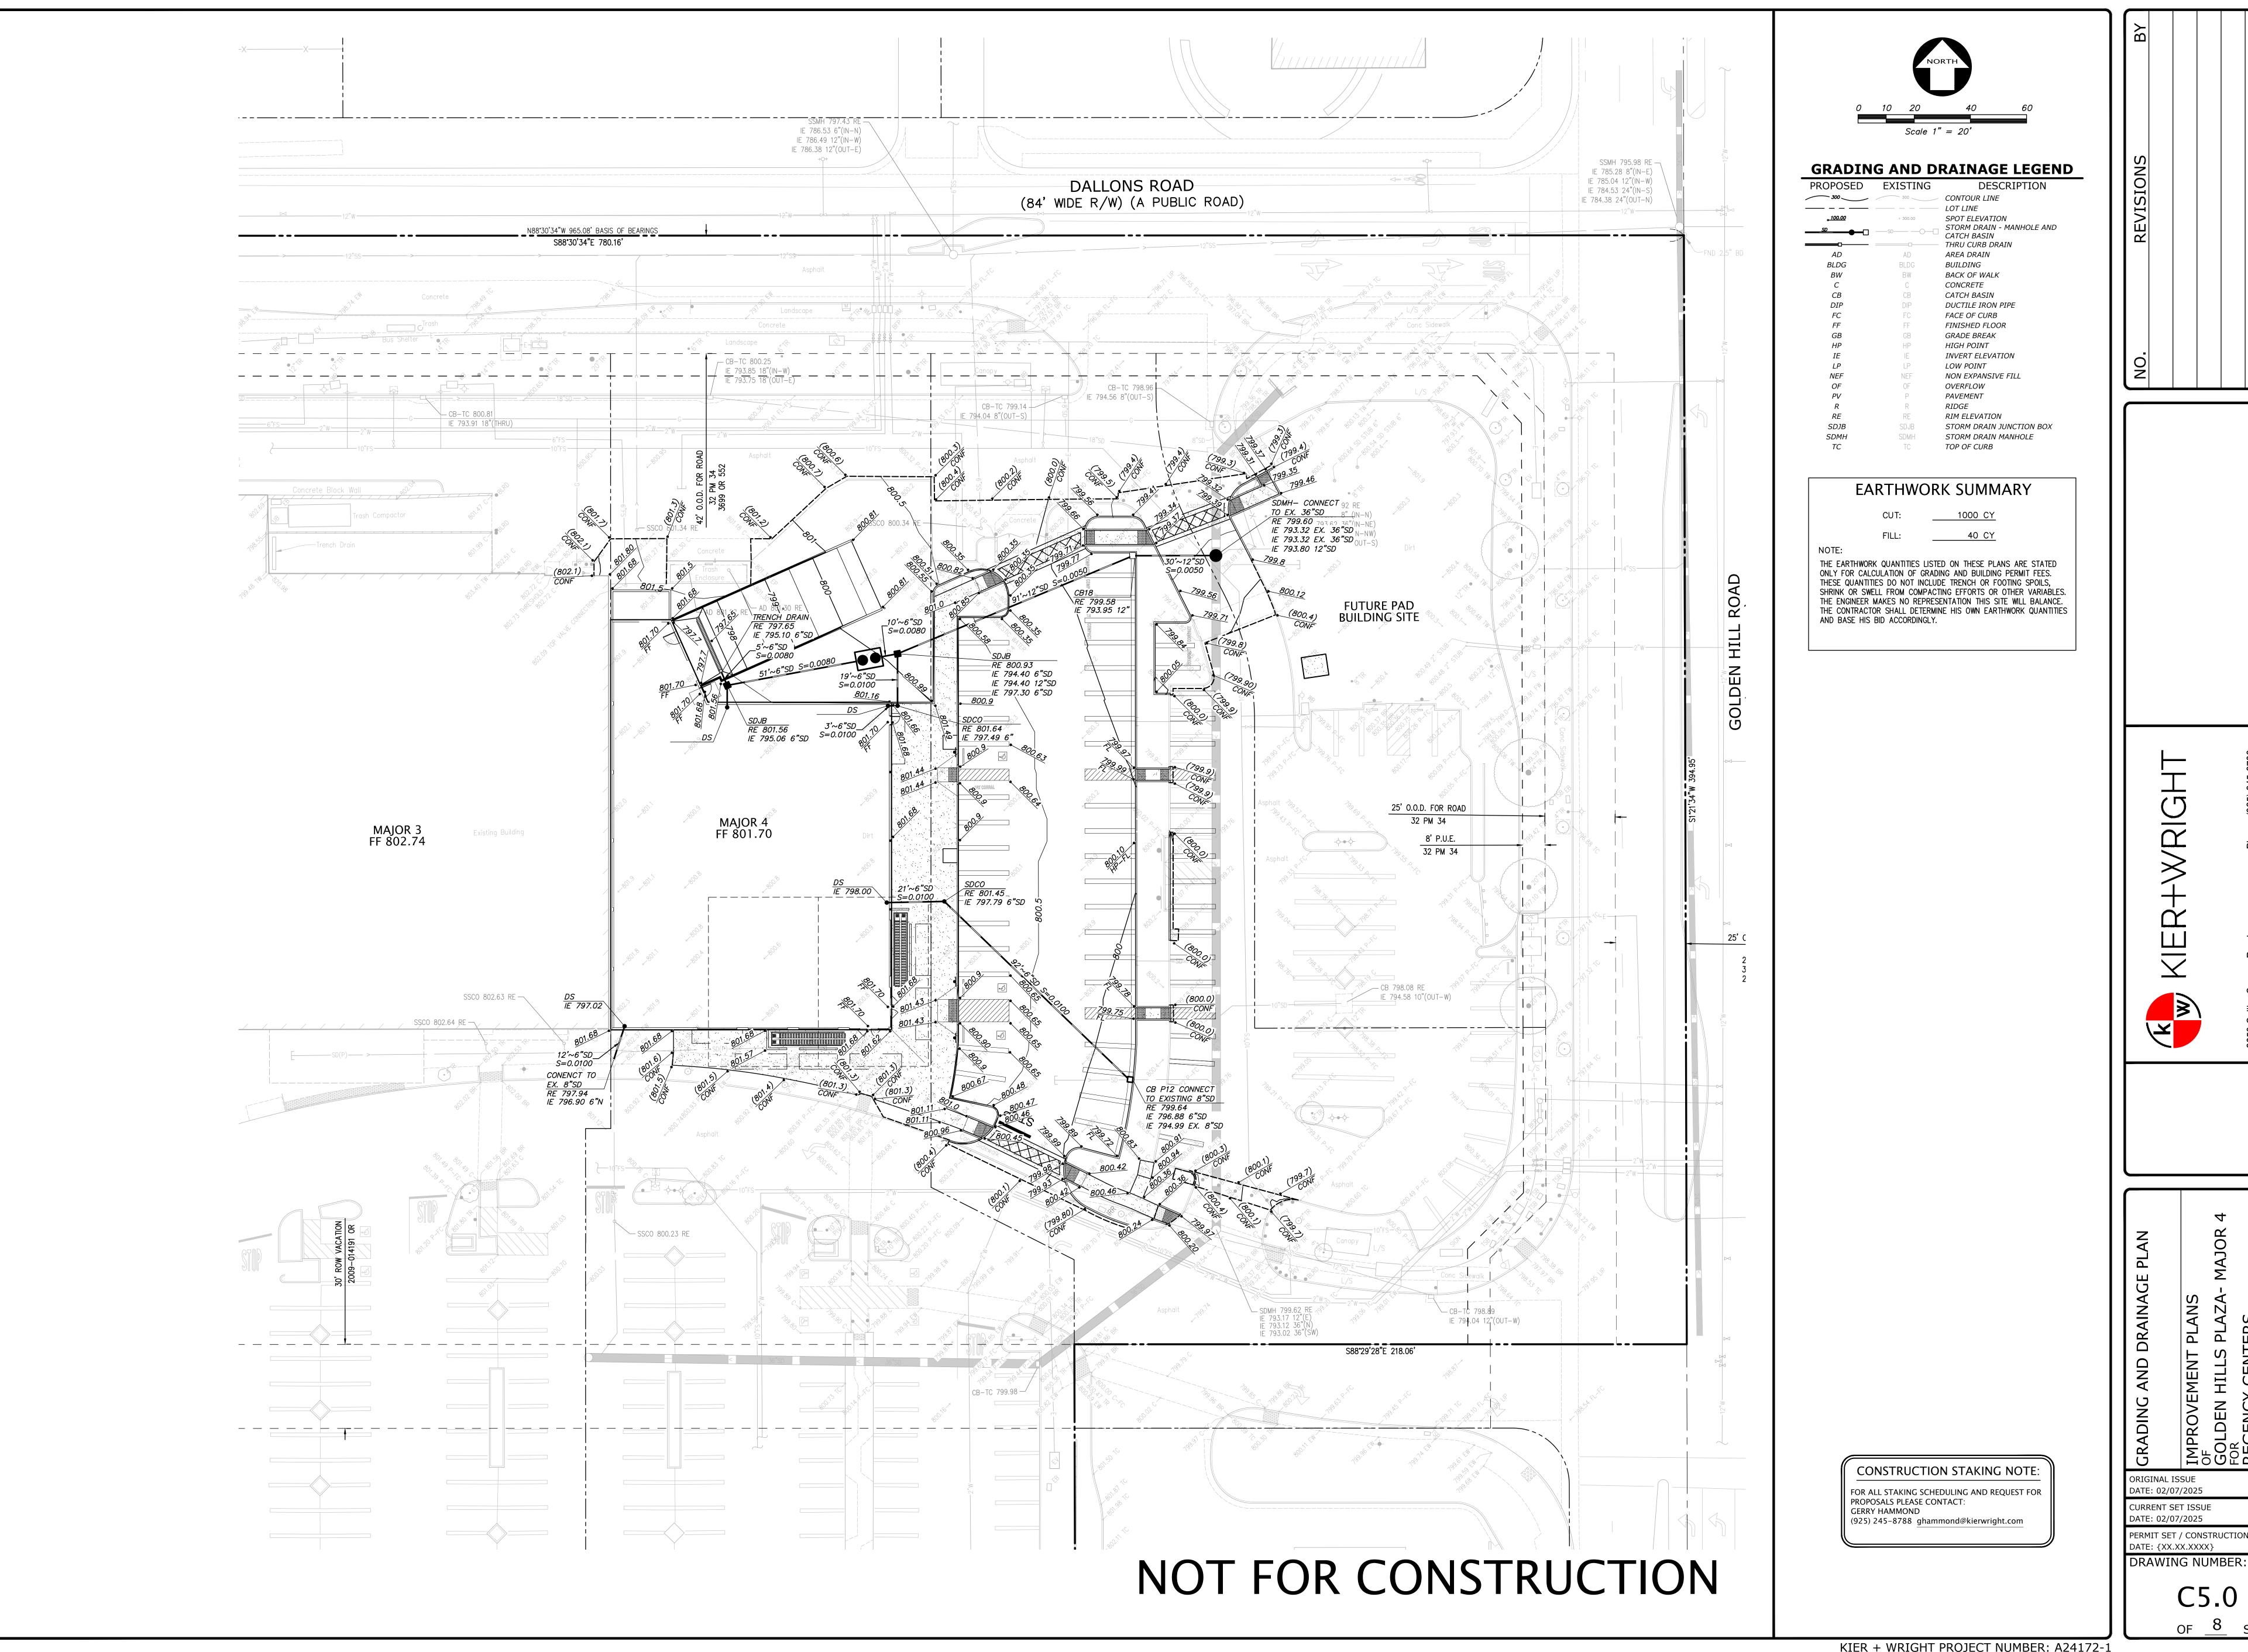


KIER+WRIGH


ORIGINAL ISSUE


DATE: 02/07/2025


DATE: 02/07/2025 PERMIT SET / CONSTRUCTION ISSUE DATE: {XX.XX.XXXX}


C5.0

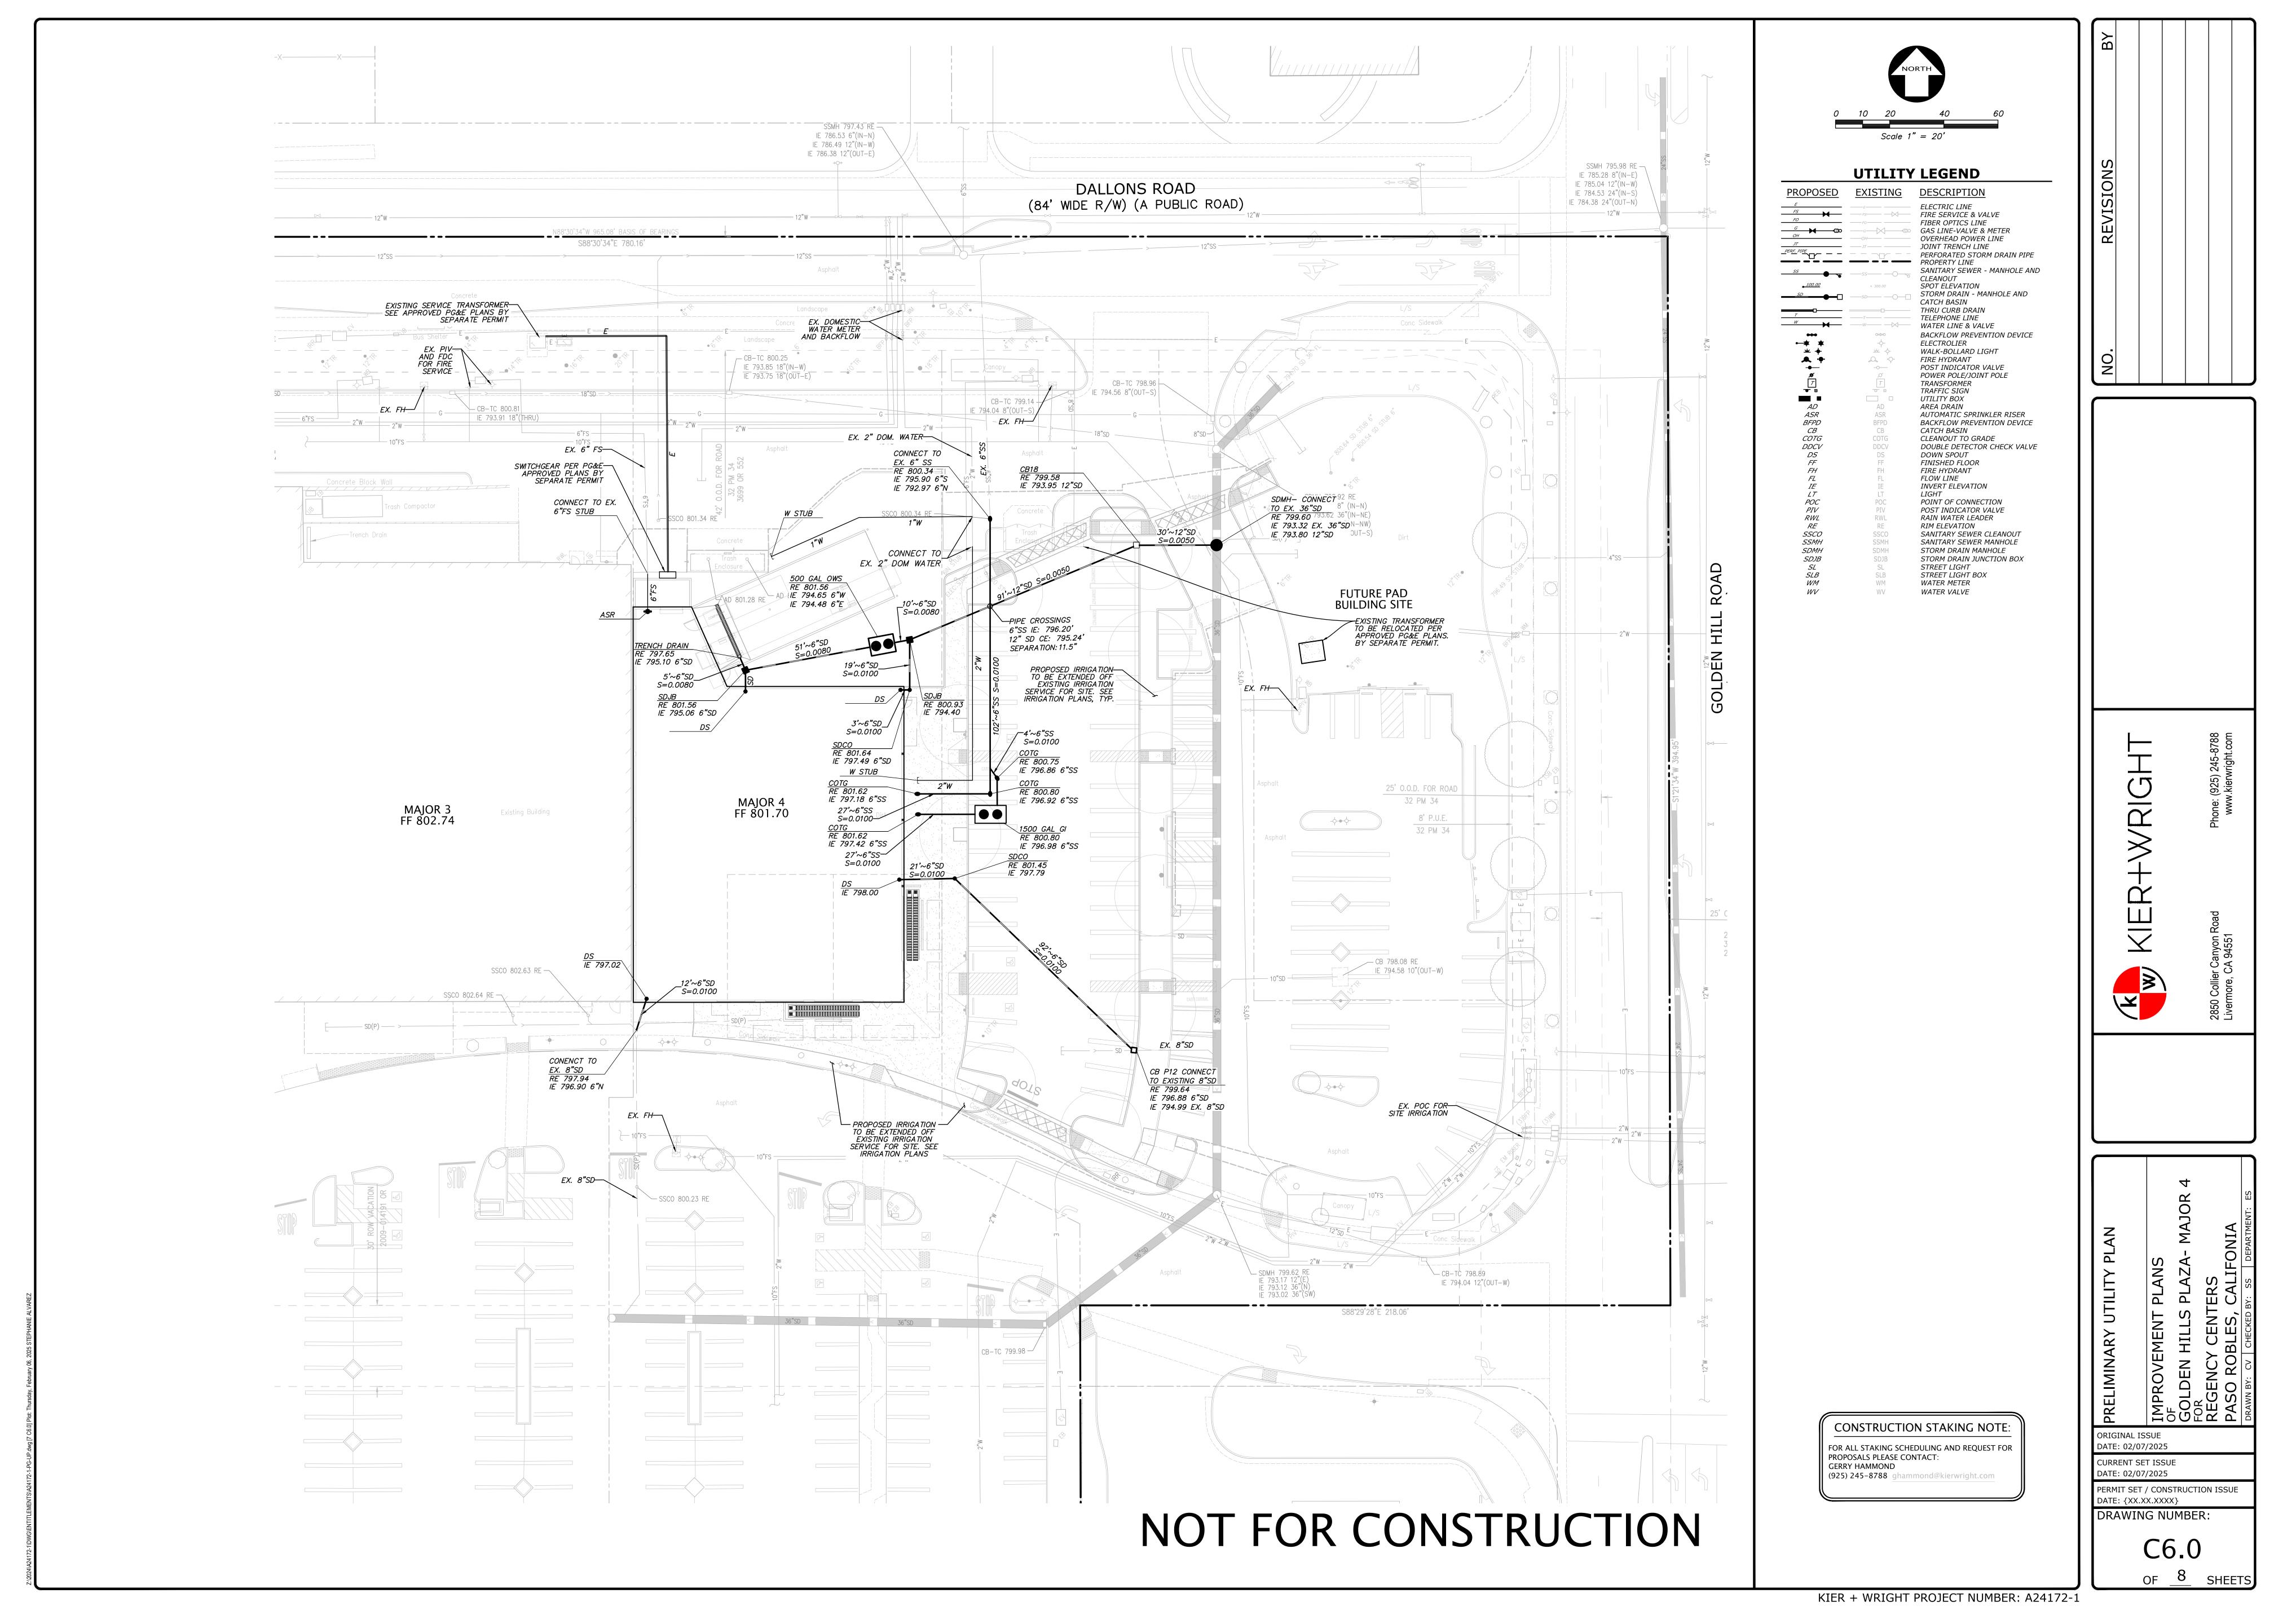

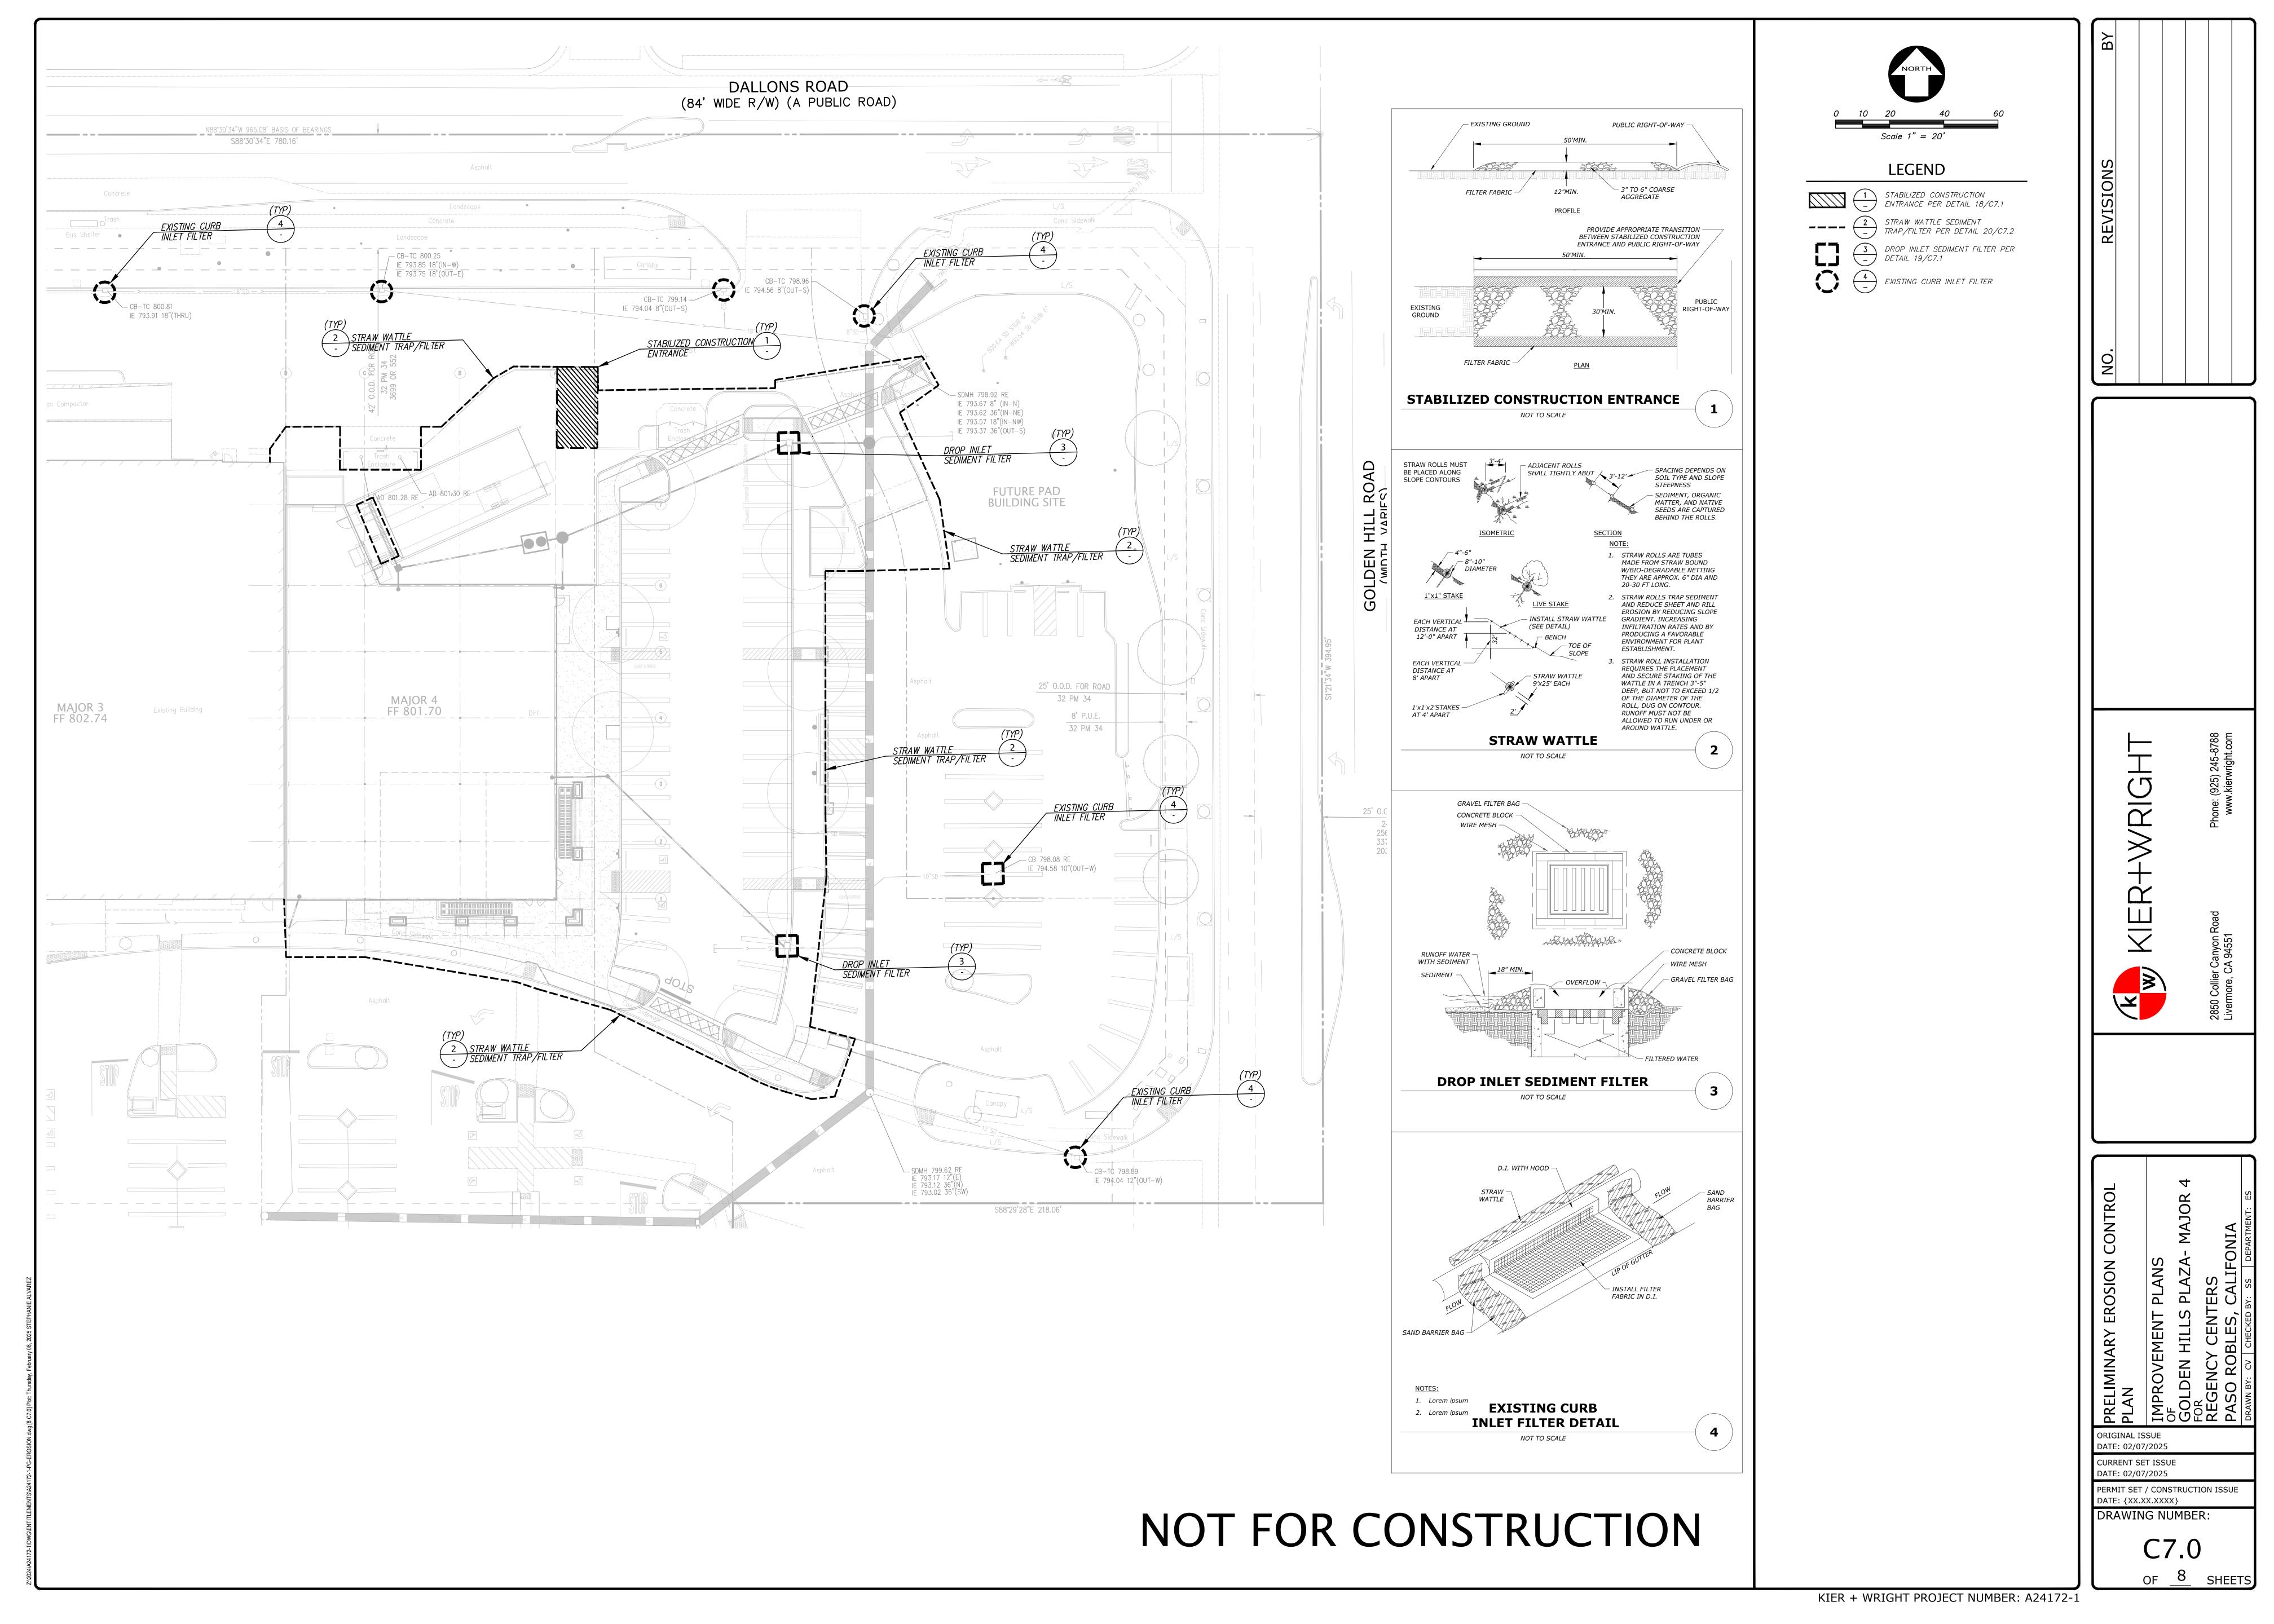

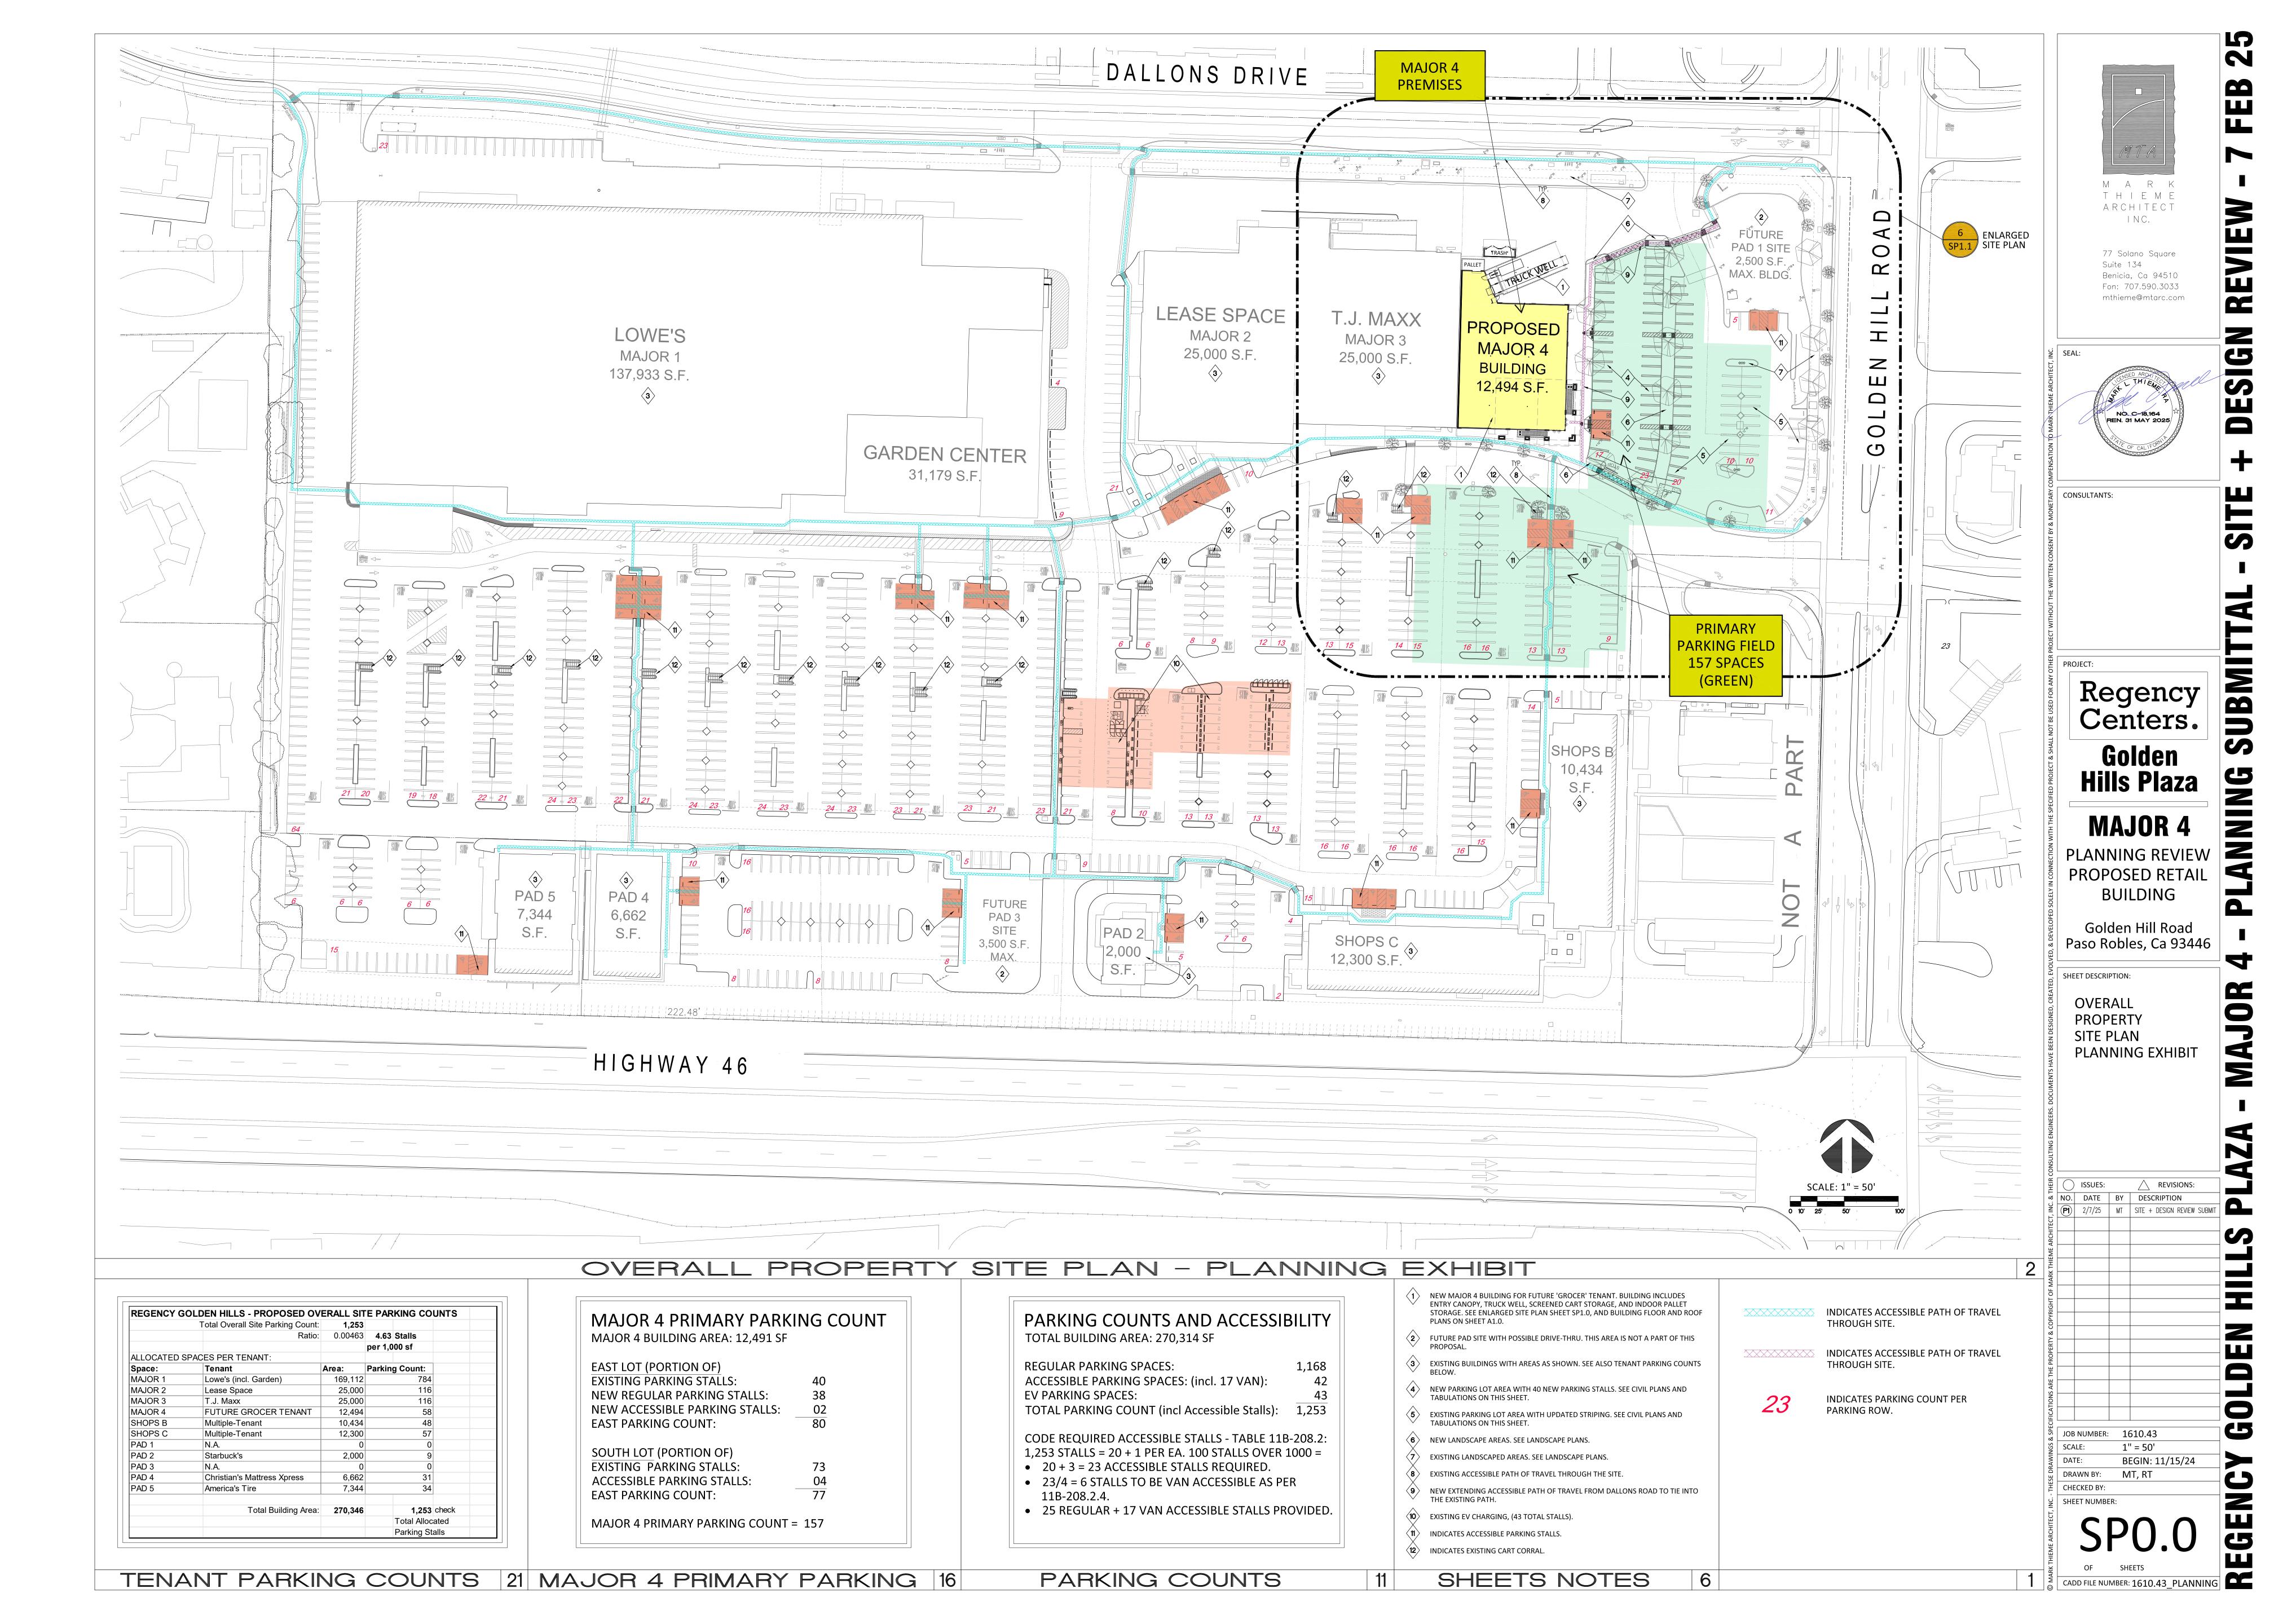

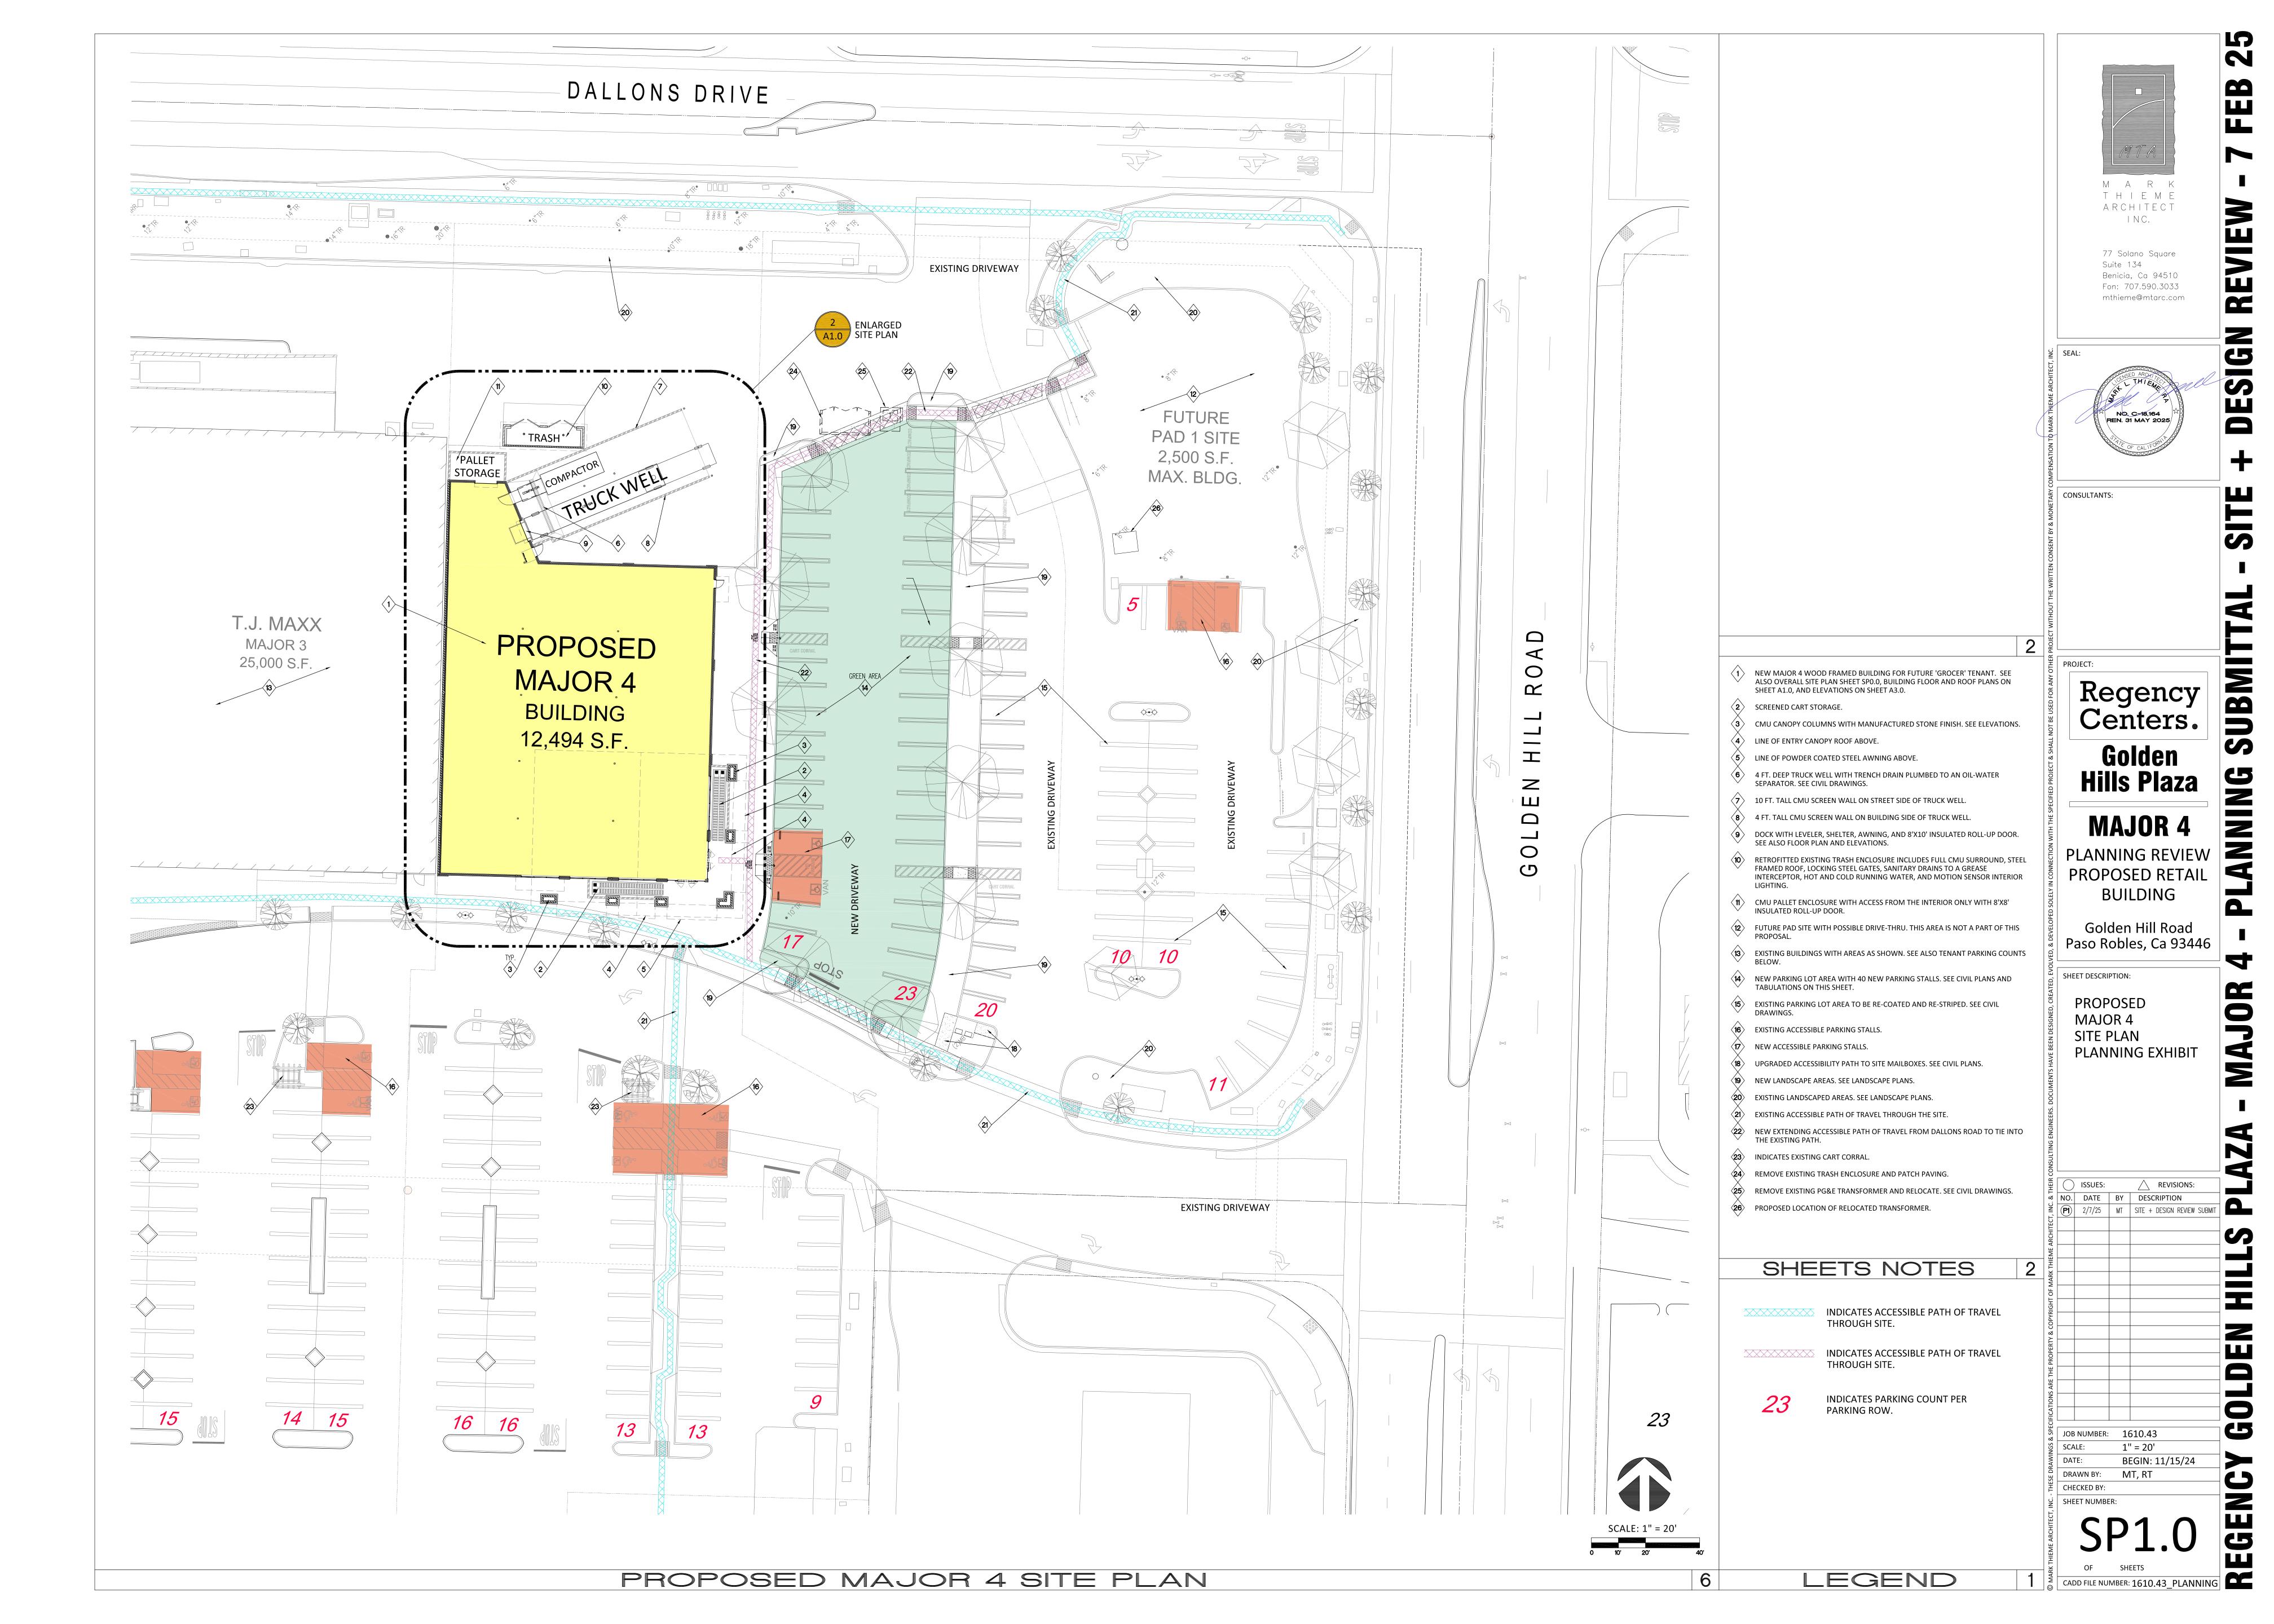

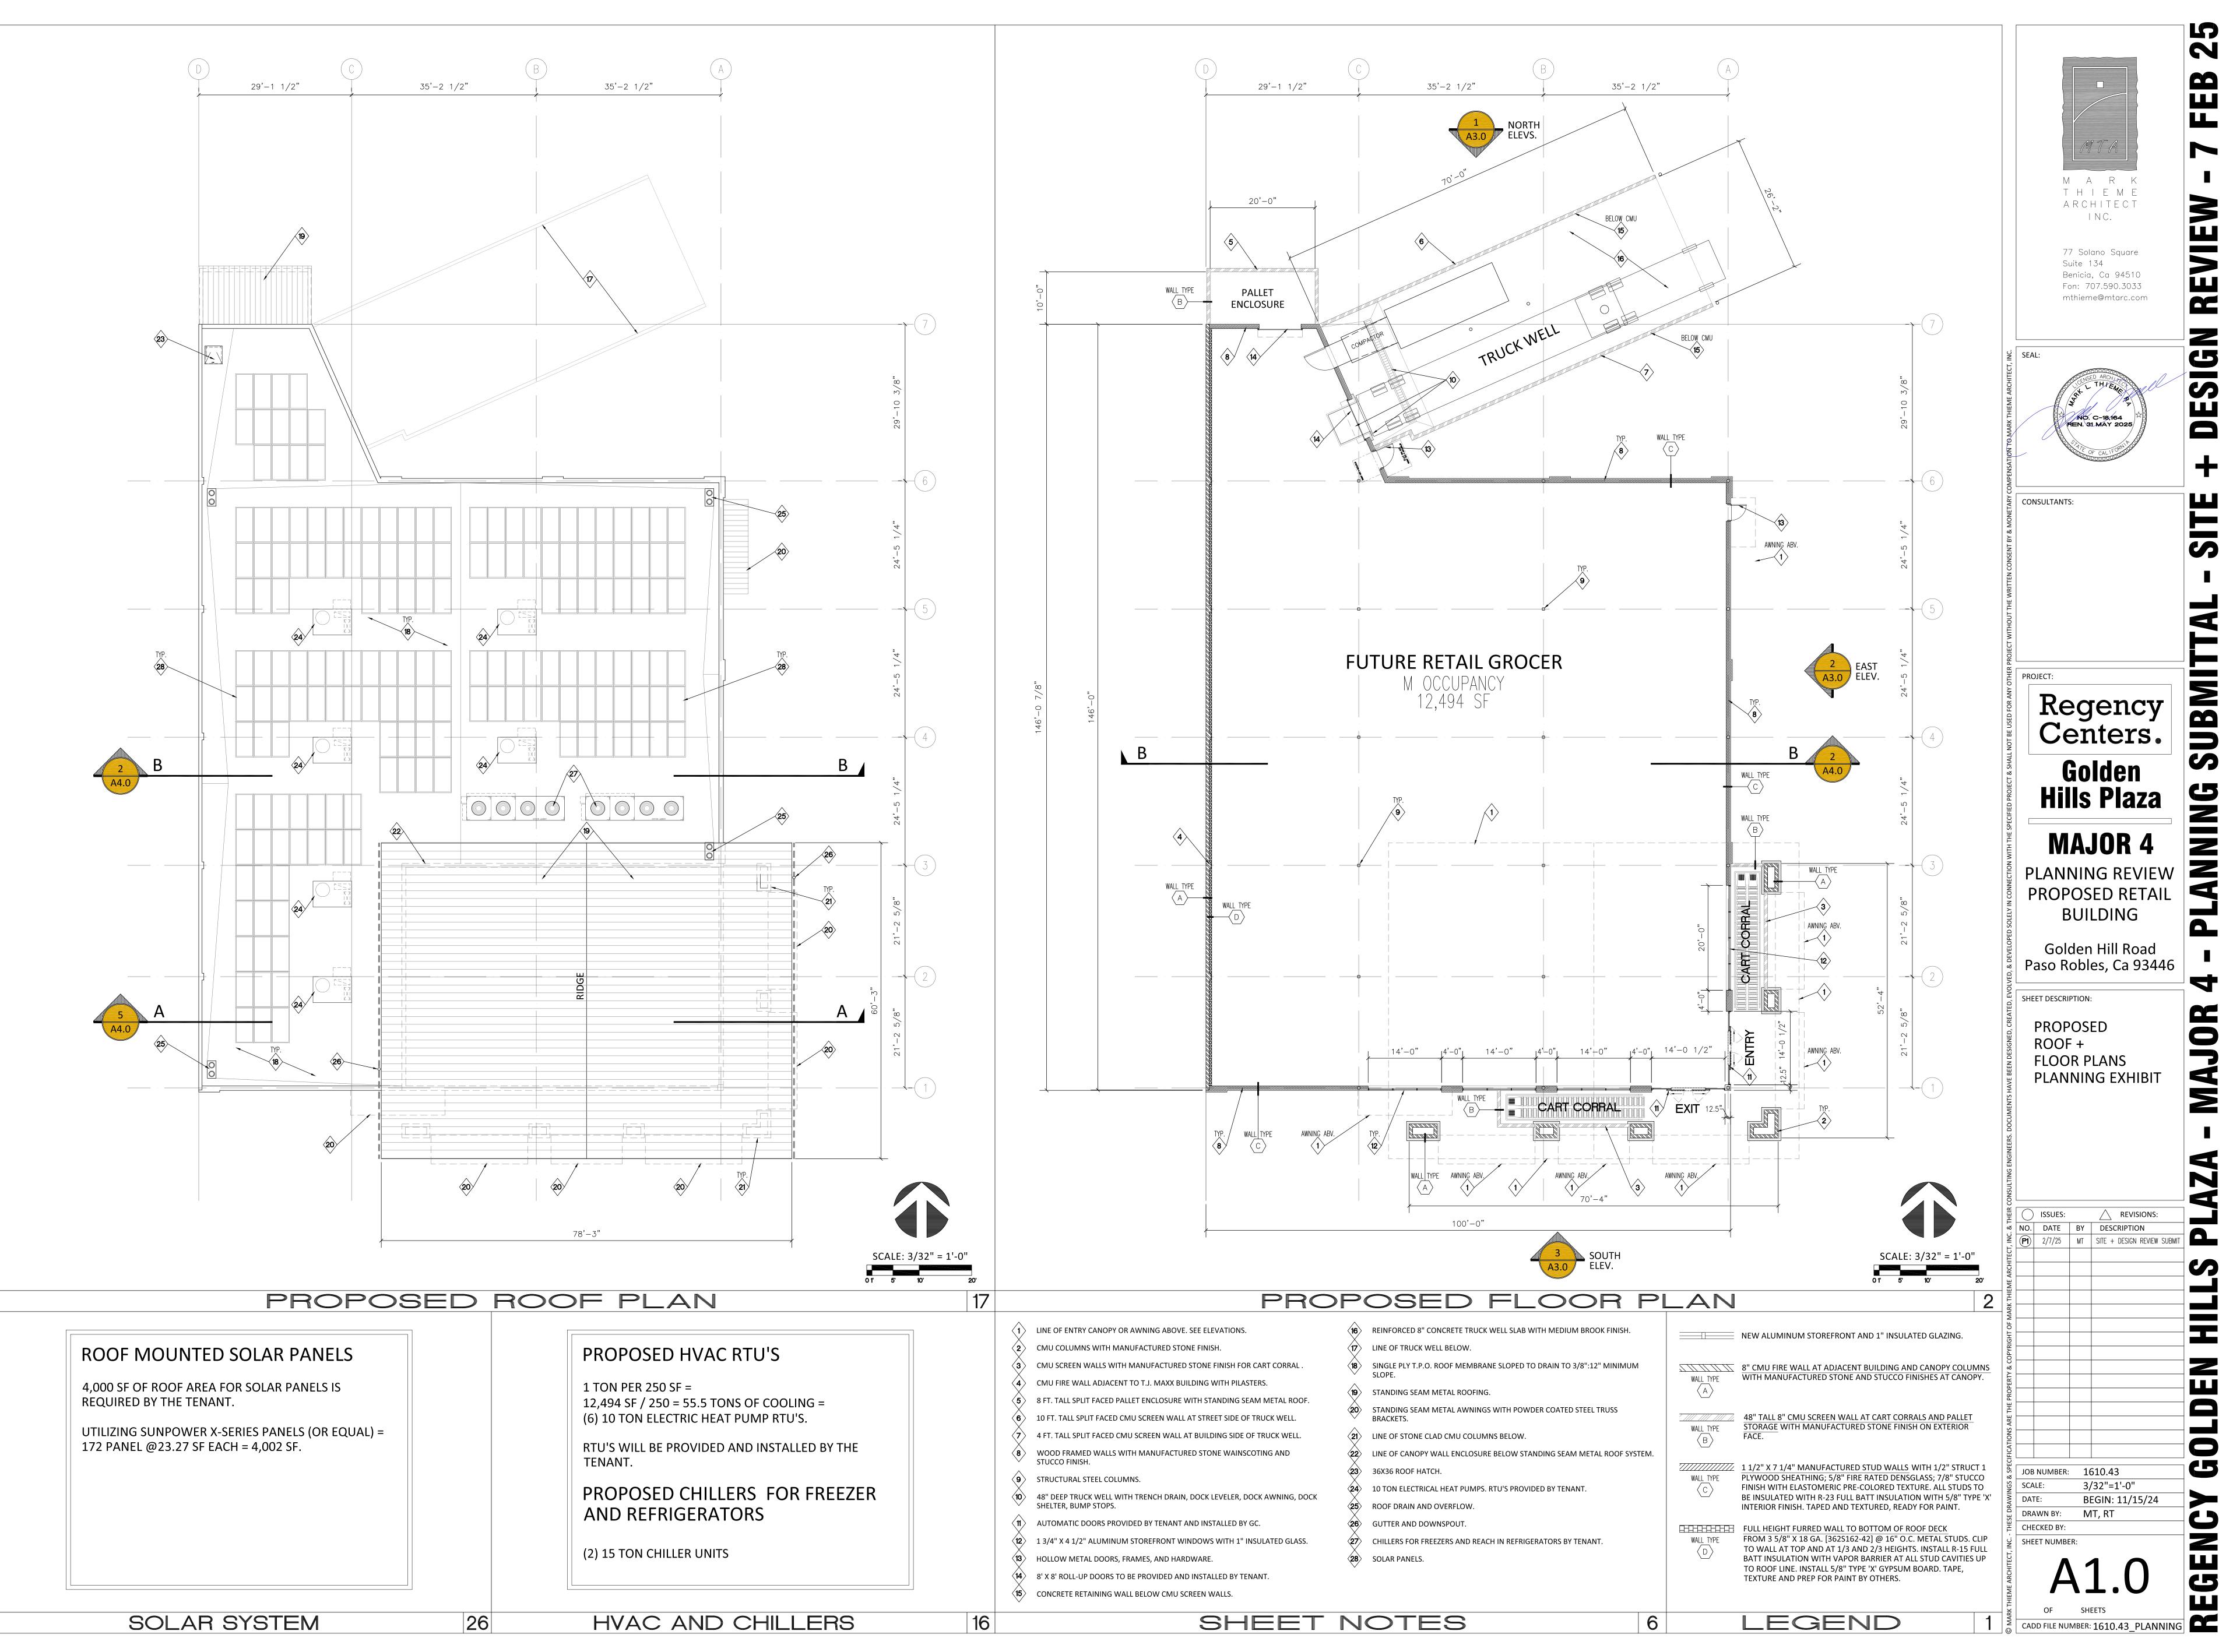

M A R K THIEME ARCHITECT INC.



Regency Centers.

Golden Hills Plaza

MAJOR 4

PLANNING REVIEW PROPOSED RETAIL BUILDING

Golden Hill Road Paso Robles, Ca 93446

SHEET DESCRIPTION:


PROPOSED ROOF + FLOOR PLANS


NO. DATE BY DESCRIPTION


| P1 | 2/7/25 | MT | SITE + DESIGN REVIEW SUBMIT


JOB NUMBER: 1610.43 3/32"=1'-0" BEGIN: 11/15/24 MT, RT




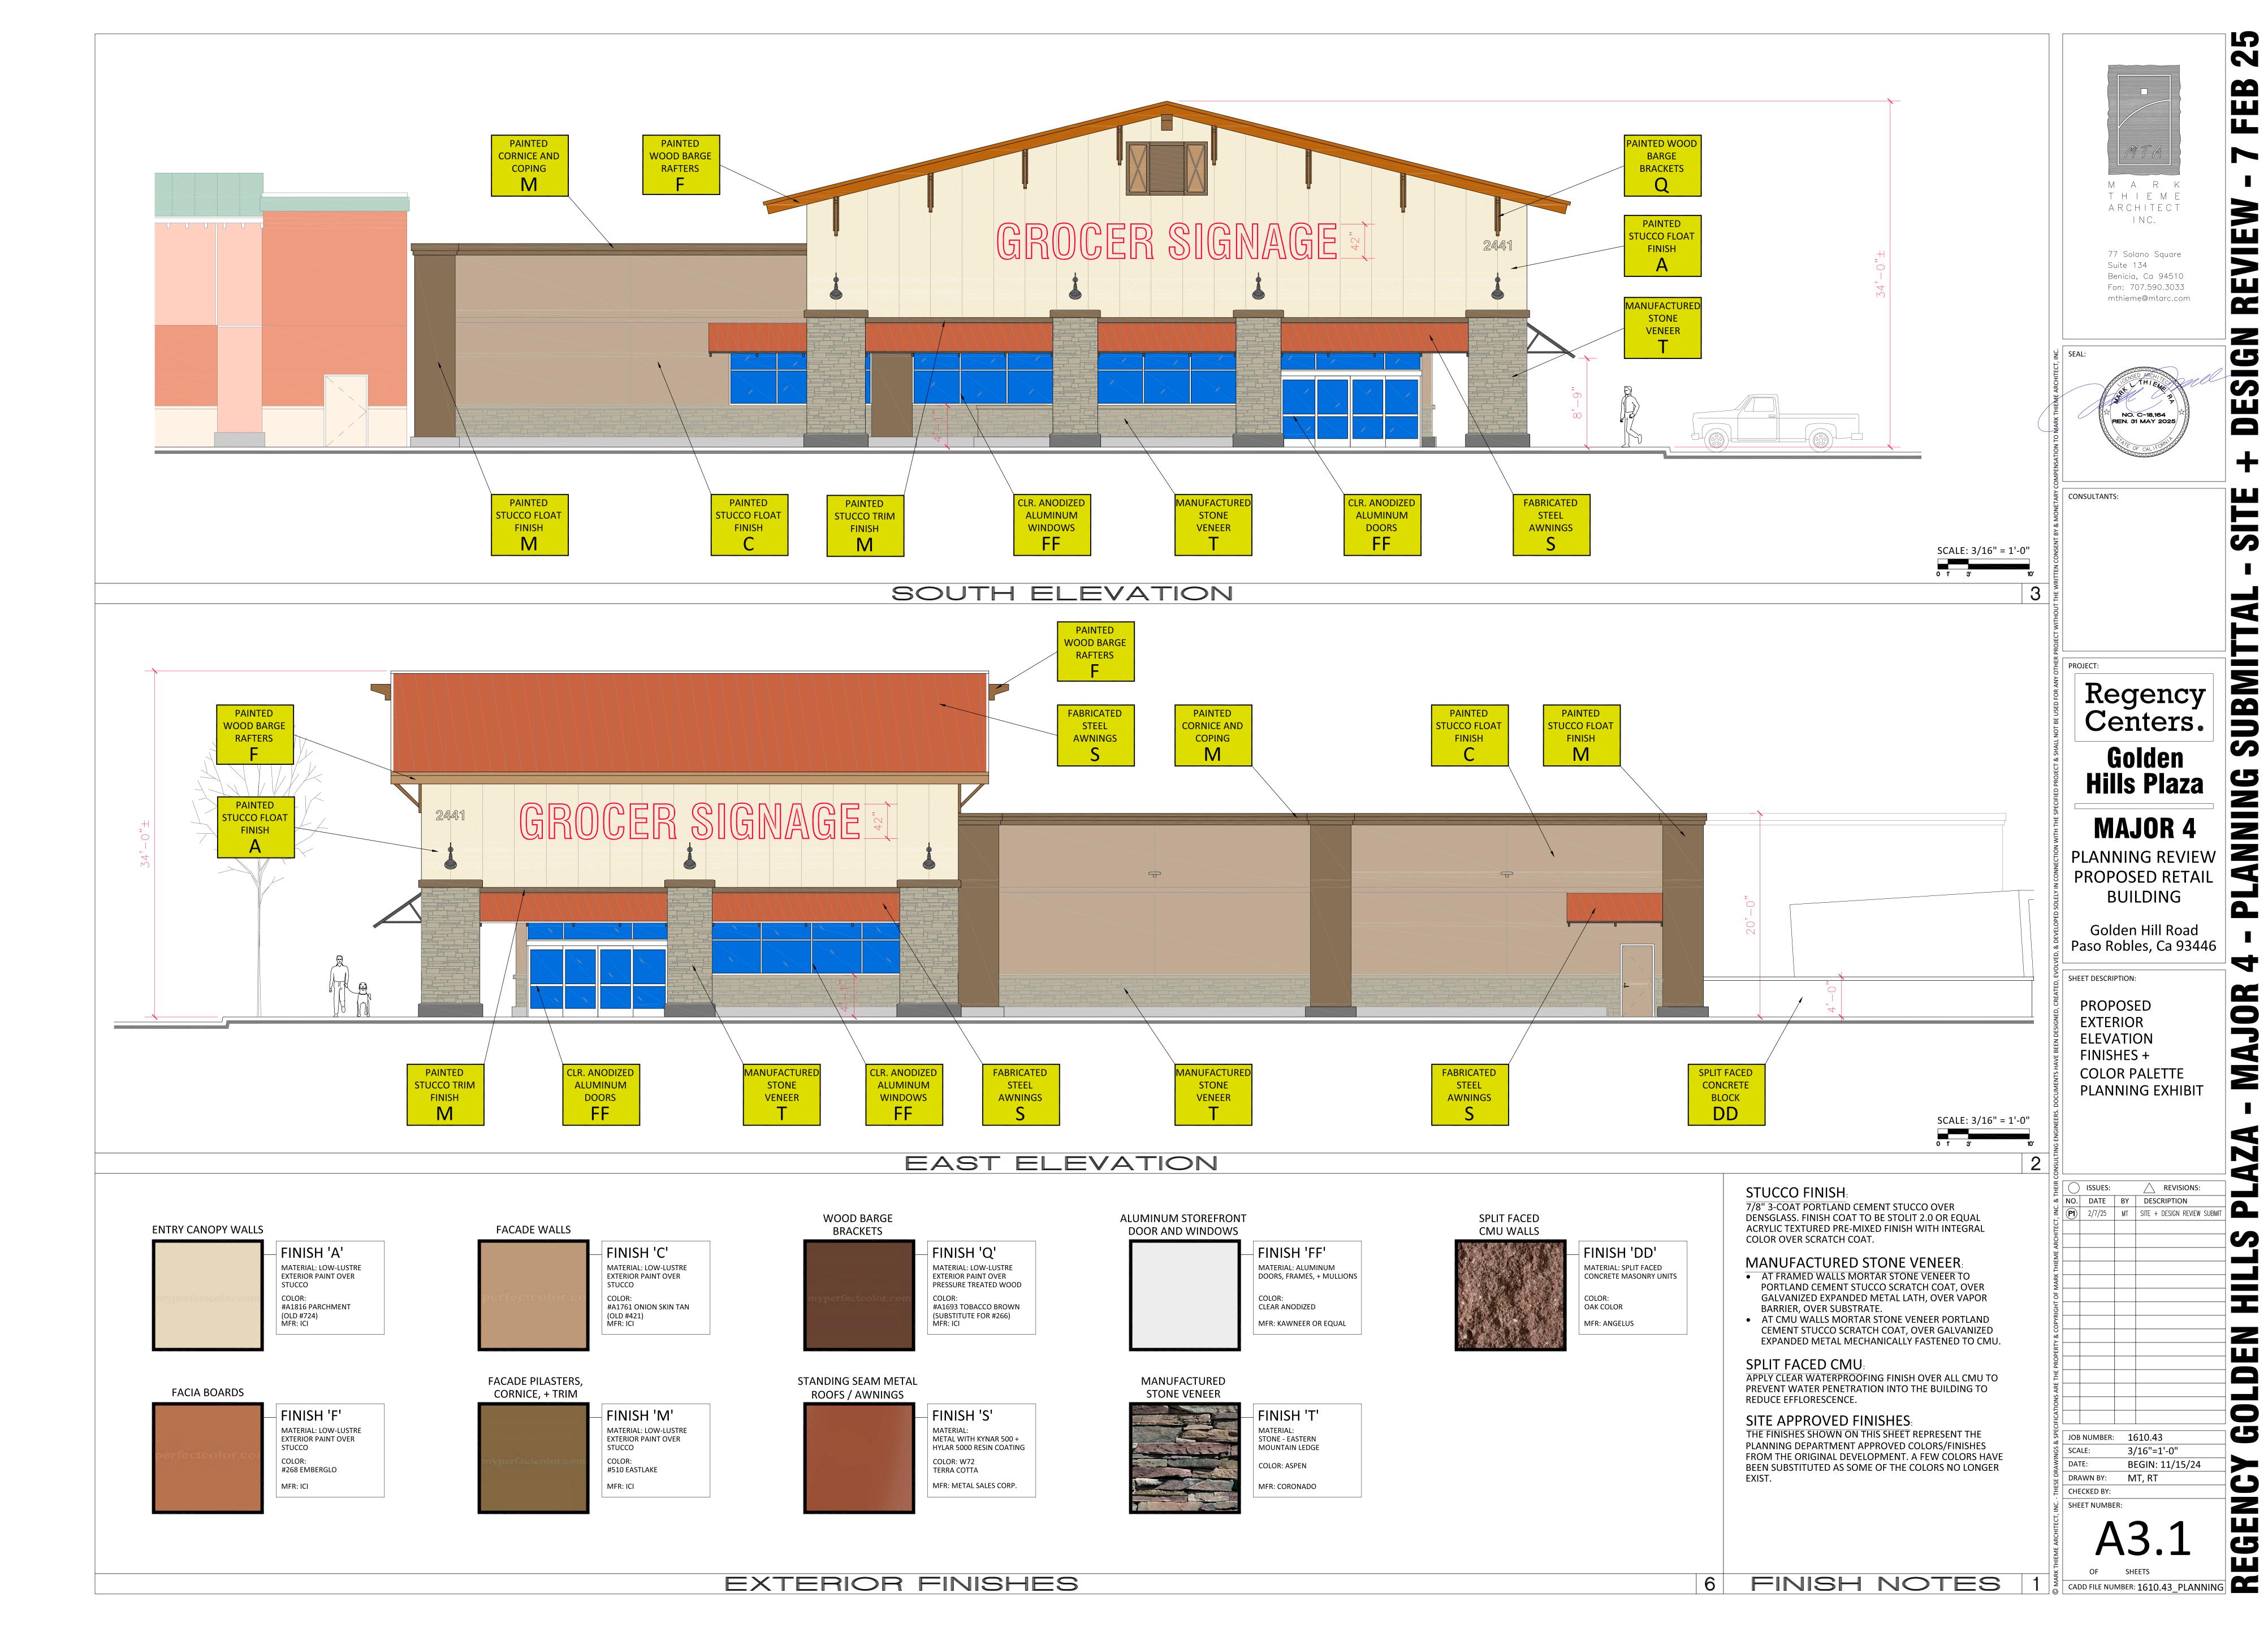

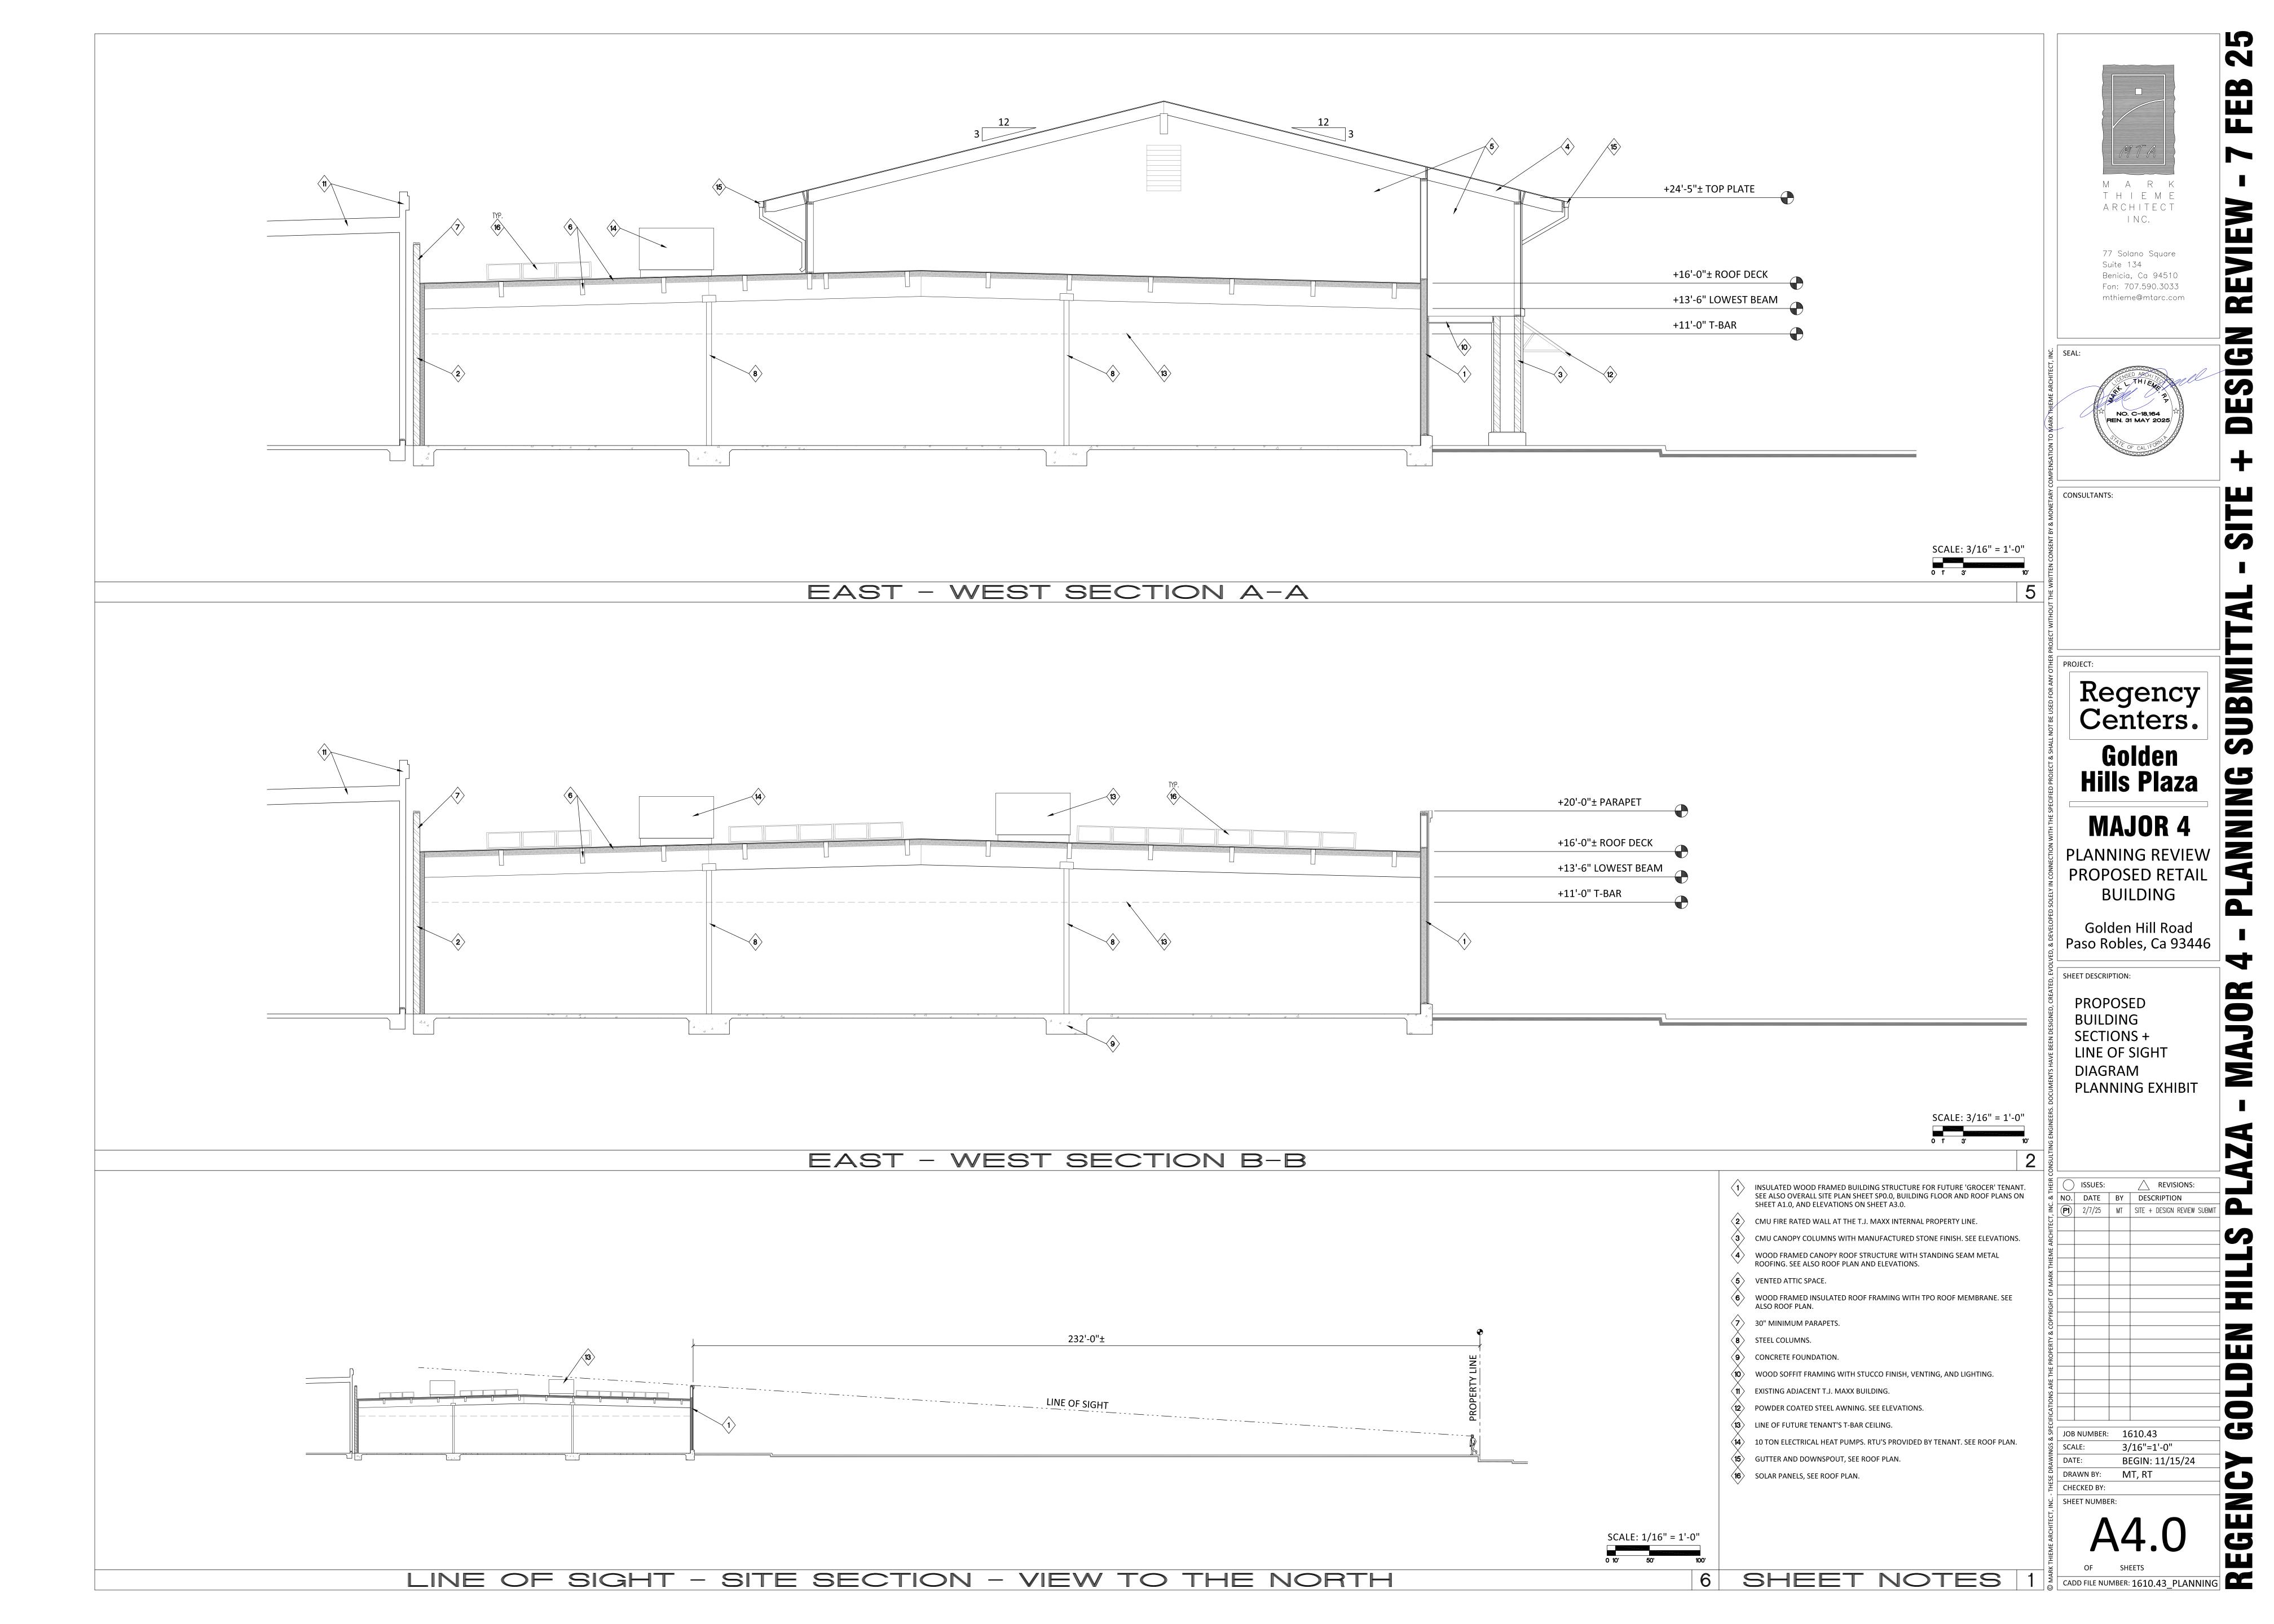

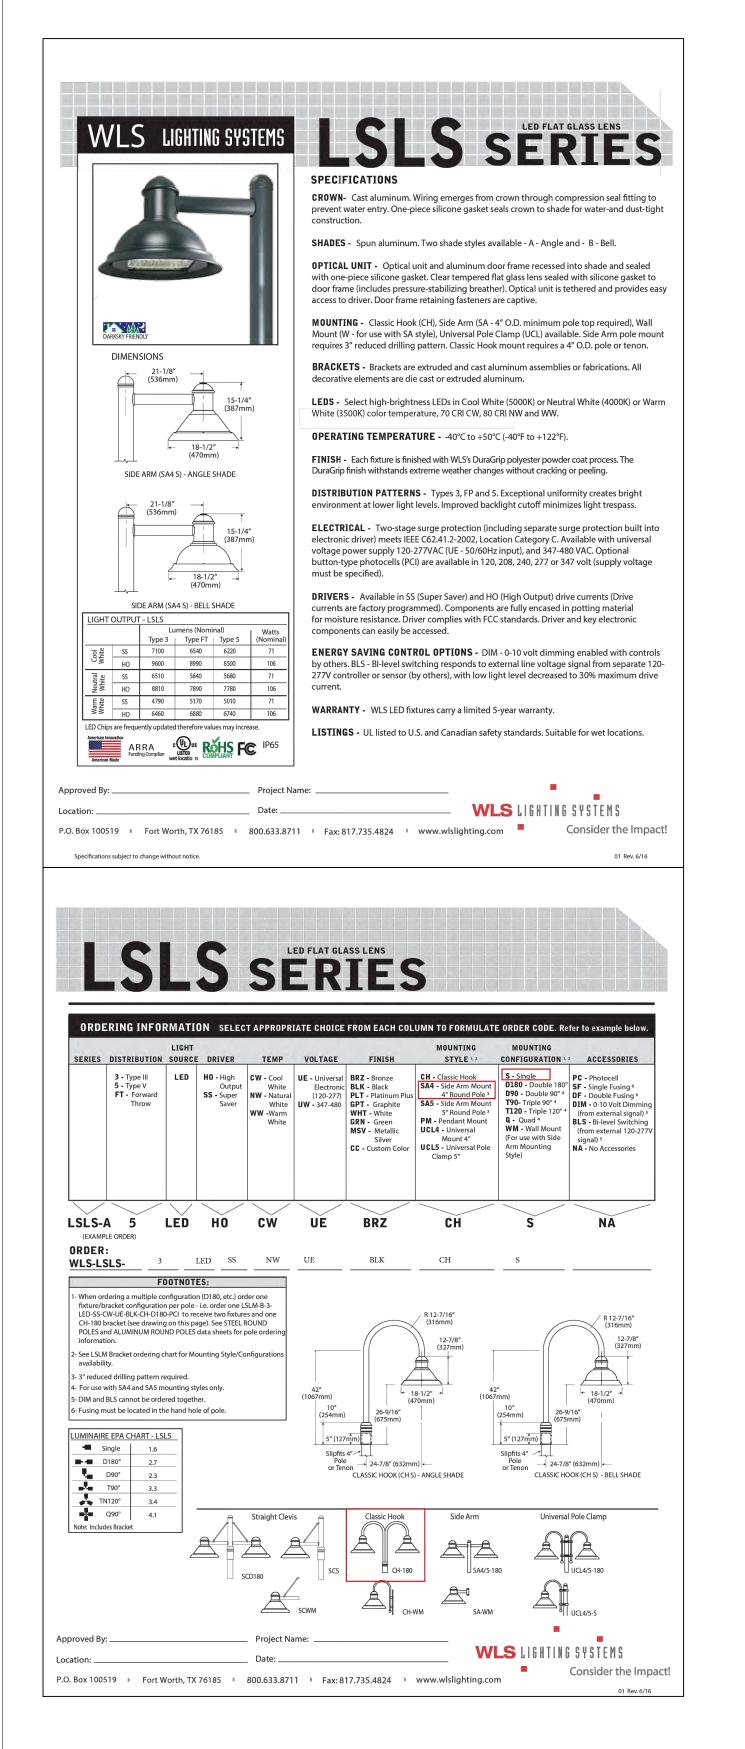

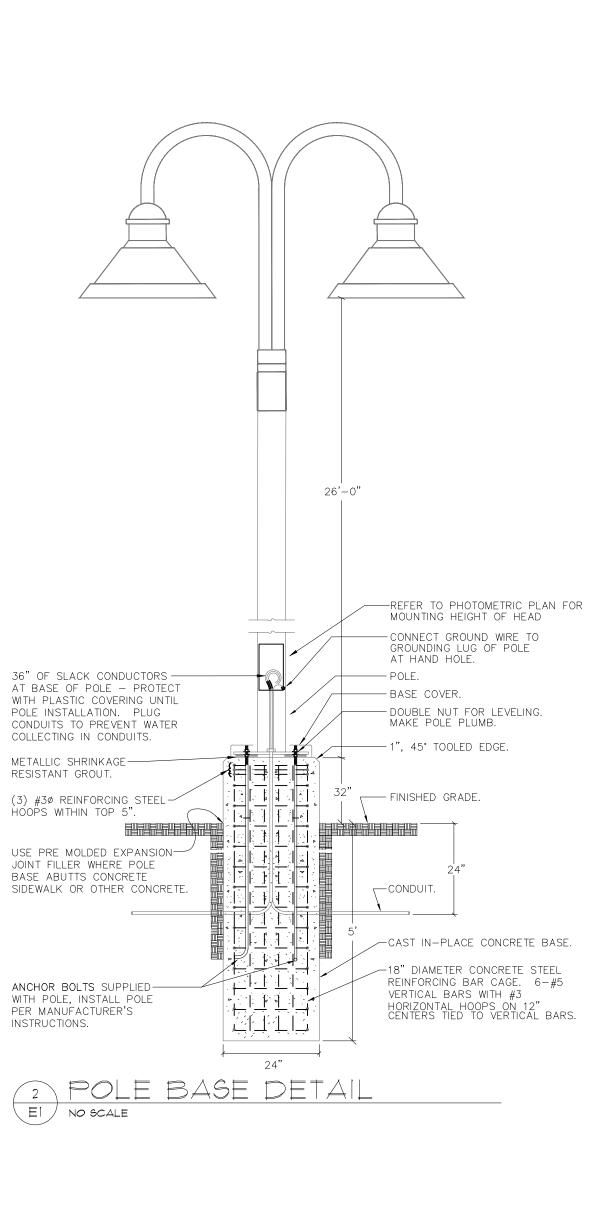

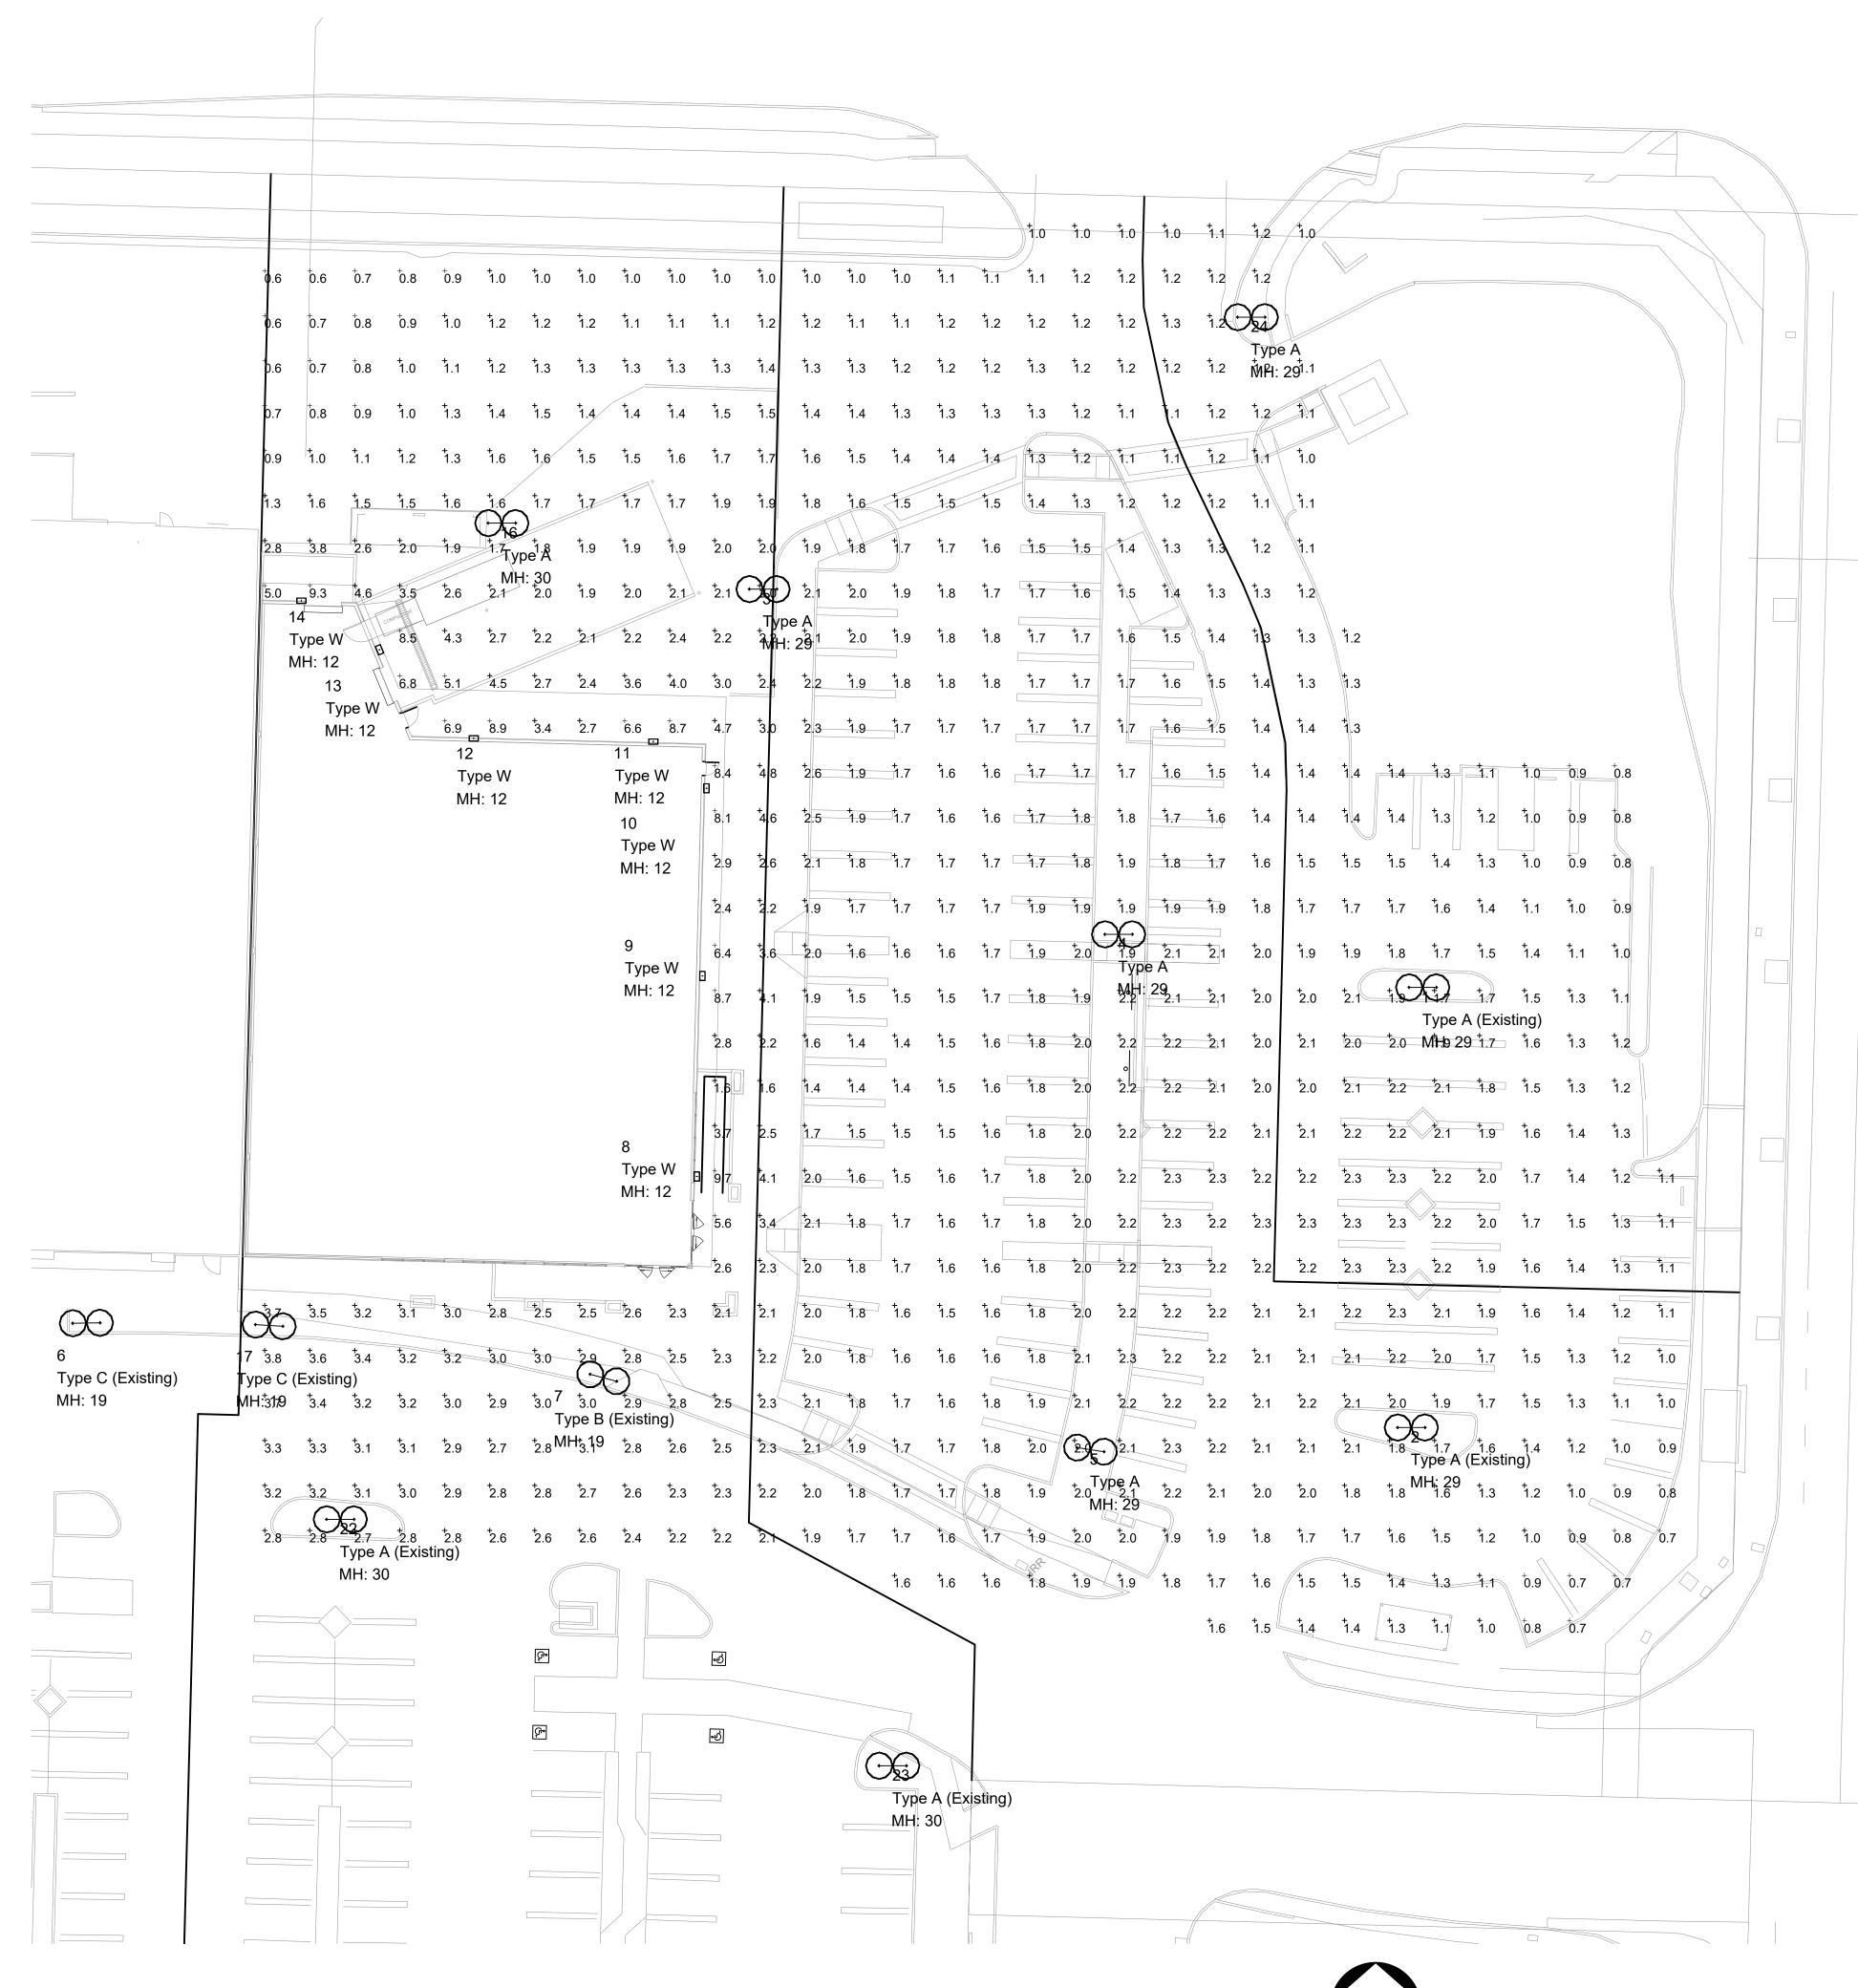

E1 SCALE: 1" = 20' - 0"

alculation Summary							
Label	CalcType	Max	Min	Max/Min	Avg		
CalcPts_1	Illuminance	9.7	0.6	16.17	1.92		

Luminaire Sch	Luminaire Schedule							
Symbol	Label	Lum. Lumens	Lum. Watts	Qty	Description	BUG Rating		
$\overline{}$	Type W	3133	22.55	11	Lithonia - WDGE2 LED P3 40K 80CRI VF	B1-U0-G0		
(Type A	10358	67.79	5	WLS Lighting - LSLS-A 5 LED HO NW UE BZX SA4 D180	B4-U0-G2		
()	Type A (Ex	10358	67.79	4	WLS Lighting - LSLS-A 5 LED HO NW UE BZX SA4 D180	B4-U0-G2		
\odot	Type B (Ex	8056	50.9	1	WLS Lighting - LSLS-A 5 LED HO NW UE BZX SA4 D180	B4-U0-G2		
\odot	Type C (Ex	8056	50.9	2	WLS Lighting - LSLS-A 5 LED HO NW UE BZX SA4 D180	B4-U0-G2		



SCALE: 1" = 20'



77 Solano Square Suite 134 Benicia, Ca 94510 Fon: 707.590.3033 mthieme@mtarc.com

CONSULTANTS:



PROJECT: Regency Centers.

Golden Hills Plaza

MAJOR 4

PLANNING REVIEW PROPOSED RETAIL BUILDING

Golden Hill Road Paso Robles, Ca 93446

SHEET DESCRIPTION:


PROPOSED MAJOR 4 **PHOTOMETRIC** PLAN

\bigcap	ISSUES:		↑ REVISIONS:
NO.	DATE	BY	DESCRIPTION
(PI)	11/17/24	MT	SITE + DESIGN REVIEW SUBMIT
	<u> </u>		

JOB NUMBER: 25002 BEGIN: 11/15/24 DRAWN BY: WVN

CHECKED BY: SHEET NUMBER:

CADD FILE NUMBER: 25002

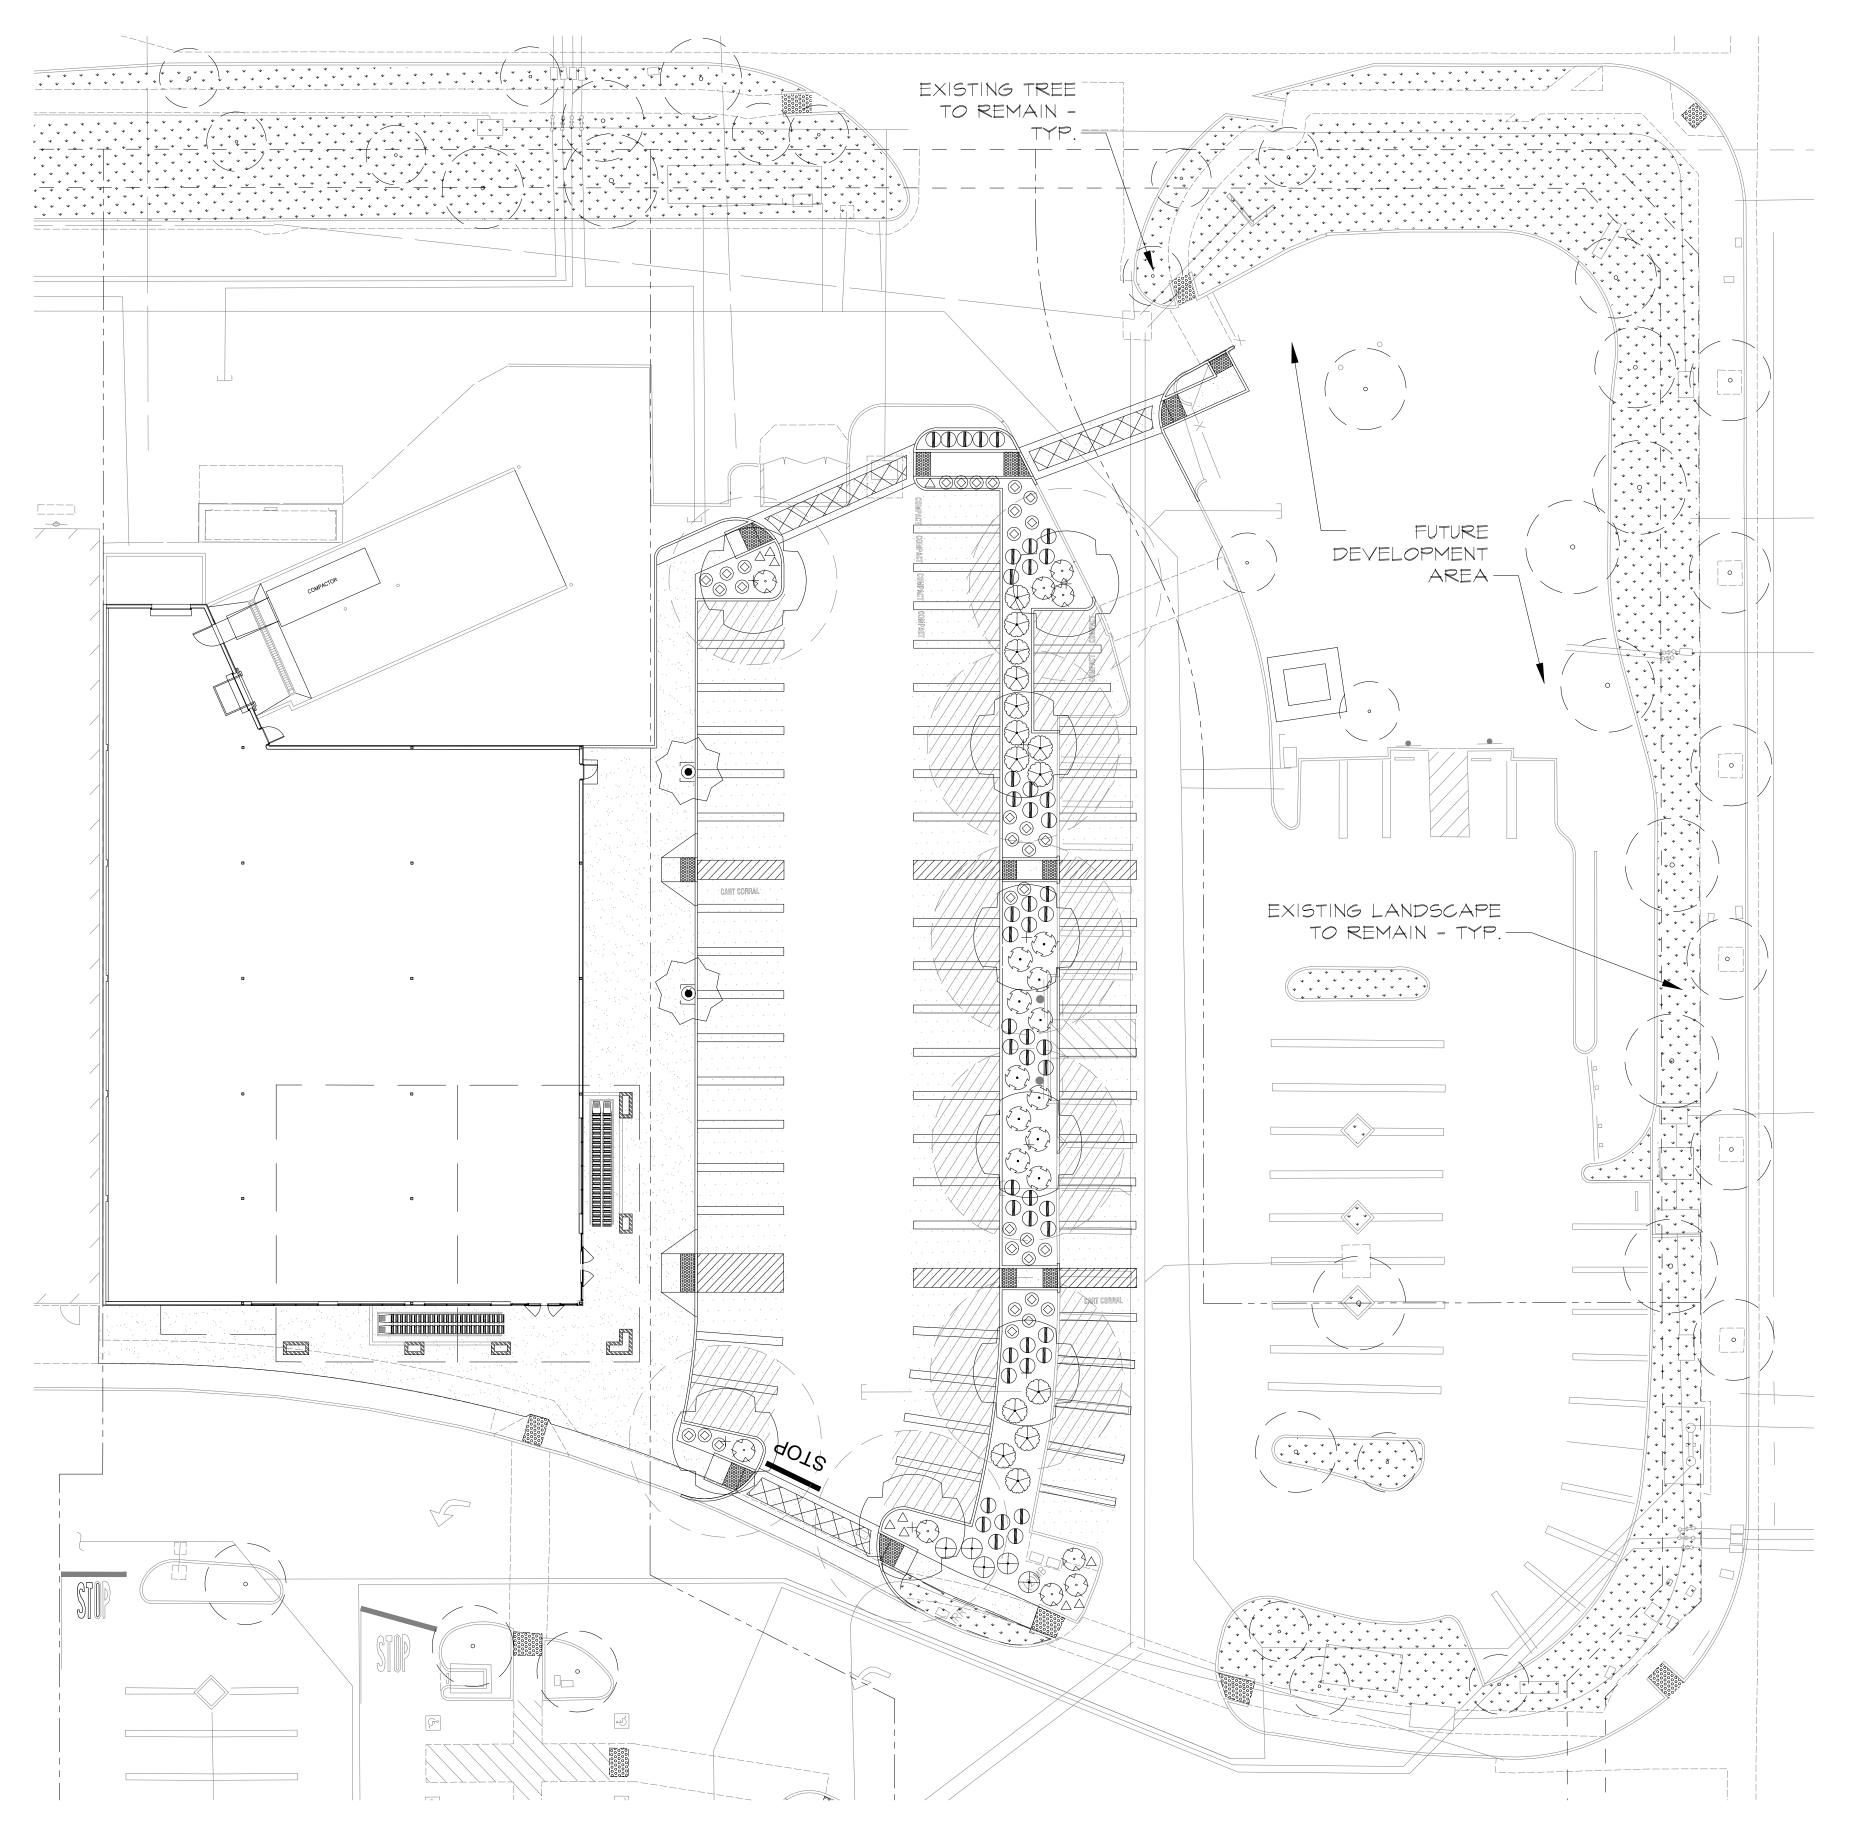

	PLANT LIST				
	SYM. NO, BOTANICAL NAM	IE COMMON NAME	SIZE	WATER REGIME HYDROZONE	MATURE HABIT H X W
	8 PISTACIA C. 'KEITH D	AVEY' CHINESE PISTACHE	24" B0×0r B\$B	L	50' × 30'
_/	2 LAGERSTROEMIA 'DY	NAMITE RED' CRAPE MYRTLE STD. T	RUNK 24" BOX or B&B	L	15' $ imes$ 15' SINGLE TRUNK
	GRASSES				
	1 47 LOMANDRA L. 'BREE	ZE' BREEZE MAT RUSH	1 GAL.	L	3' × 3'
	DROUGHT TOLER	ANT SHRUBS			
	14 NERIUM OLEANDER	PETITE SALMON' PETITE OLEANDER	5 GAL.	L	5' × 5'
	5 ROSA MEIDILAND F	RE' FIRE MEIDILAND ROSE	5 GAL.	Μ	$2' \times 4'$
	() 11 CALLISTEMON 'LITTL	E JOHN' DW. BOTTLE BRUSH	5 GAL.	L	3' × 3'
	9 LANTANA SPREADIN	IG SUNSET' LANTANA	5 GAL.	L	2' × 5'
	PERENNIALS				
	A 10 ACHILLEA 'MOONSH	NE YARROW	IGAL.	L	2 × 2
		TA' FORT NIGHT LILY	I GAL.	L	3' × 3'

NOTE: ROOT BARRIERS SHALL BE INSTALLED PER TREE PLANTING DETAIL SHEET L3.1 WHERE TREES ARE WITHIN 10' OF PAVEMENT.

LEGEND

BARK MULCH-ALL PLANTERS ORGANIC RECYCLED CHIPPED WOOD MULCH- PLACE 3" MIN. DEPTH 1/2"- 3" LENGTH DECORATIVE BARK COLORED BROWN TO MATCH EXISTING NO VISIBLE CONTAMINANTS, PLACE 3" MIN, DEPTH OF BARK IN ALL PLANT BASINS



EXISTING LANDSCAPE TO REMAIN. PROTECT IN PLACE. EXISTING LANDSCAPE DAMAGED DURING CONSTRUCTION TO BE REPLACED WITH LIKE OR EQUAL VALUE.



EXISTING TREE TO REMAIN

LANDSCAPE NOTES: THE CONTRACTOR SHALL GUARANTEE ALL PLANT MATERIALS FOR ONE FULL YEAR UPON FINAL ACCEPTANCE OF THE PROJECT. THE CONTRACTOR SHALL MAINTAIN THE SITE , INCLUDING WATER SCHEDULING AND MOWING, FOR THE ONE YEAR GUARANTEE PERIOD. ANY PLANTS REPLACED UNDER THIS GUARANTEE SHALL BE GUARANTEED FOR ONE FULL YEAR TAG ALL REPLACED PLANT MATERIAL WITH REPLACEMENT DATE.

SOIL IN THE PLANTER AREAS SHALL BE AMENDED PER A SOIL ANALYSIS REPORT AND RECOMMENDATIONS PREPARED BY AN AGRICULTURAL SUITABILITY SOIL TESTING SERVICE AFTER PLANTERS ARE BROUGHT TO GRADE PER CIVIL GRADING PLAN. ALL SOIL ANALYSIS AND REPORTS SHALL SATISFY THE REQUIREMENTS OF 492.5 IN THE CALIFORNIA WATER EFFICIENT LANDSCAPE ORDINANCE FOR A SOIL MANAGEMENT REPORT. THE RESPONSIBILITY OF PREPARATION THIS REPORT SHALL BE THE LANDSCAPE CONTRACTOR'S RESPONSIBILITY. THE CONTRACTOR SHALL SUBMIT THE REPORT TO THE GENERAL CONTRACTOR FOR SUBMITTAL TO THE CITY. SHRUB PLANTERS: COLLECT A MINIMUM OF 16 SOIL SAMPLES FROM ONSITE PLANTER AREAS AFTER PLANTERS HAVE BEEN BROUGHT TO GRADE. THOROUGHLY MIX THE COLLECTED SAMPLES AND SUBMIT ONE MIXED SAMPLE FOR ANALYSIS WITH RECOMMENDATIONS FOR ORGANIC SOIL AMENDMENT. PLANTER AREA SOILS SHALL BE AMENDED PER THE SOIL ANALYSIS RECOMMENDATIONS TO A MIN. DEPTH OF 6" PRIOR TO PLANTING. AT MINIMUM FOR SOILS LESS THAN 6% ORGANIC MATTER IN THE TOP 6 INCHES OF SOIL, COMPOST AT A RATE OF FOUR CUBIC YARDS PER 1,000 S.F. OF PERMEABLE AREA SHALL BE INCORPORATED TO A DEPTH OF SIX INCHES INTO EXISTING SOIL. PLANTER AREAS: LOOSEN SOIL TO A DEPTH OF 12" PRIOR TO AMENDING. SPREAD AMENDMENT AND INCORPORATE PER SOIL ANALYSIS RECOMMENDATIONS OR MIN. STATED WHICH EVER IS GREATER. RAKE OUT ALL ROCK AND DEBRIS GREATER THAN I 1/2" DIA. RAKE TO AN EVEN GRADE. SOIL REPORT SHALL INCLUDE SOIL INFILTRATION RATE FOR IRRIGATION SCHEDULING. PLANT BACKFILL SHALL BE AMENDED AT THE TIME OF PLANTING PER THE SOIL RECOMMENDATIONS. IN ROCK MULCH AREAS WHERE SHRUBS AND OR TREES ARE AT A MINIMUM OF 10' OC, SOIL AMENDING MAY BE PROVIDED PER INDIVIDUAL PLANT PIT BACKFILL ONLY. ALL PLANTS SHALL BE SPRAYED WITH VERMA-PLEX OR EQUAL ORGANIC FOLIAR FERTILIZER AFTER INSTALLATION. SOIL SHALL NOT BE TILLED OR AMENDED WITHIN THE DRIP LINE OF EXISTING TREES IF PRESENT ONSITE. A COPY OF THE SOIL ANALYSIS AND SOIL AMENDMENTS INCORPORATED SHALL BE SUBMITTED THE OWNER AND THE CITY AS PART OF THE PROJECT

THE CONTRACTOR IS RESPONSIBLE FOR PROVIDING PLANT MATERAIL PER SYMBOLS AND SPACING INDICATED ON THE PLAN. SYMBOLS PREVAIL OVER QUANTITIES LISTED IN THE PLANT LEGEND.

24 HR. MIN. NOTICE TO THE OWNER REPRESENTATIVE REQUIRED FOR PLANT MATERIAL REVIEW PRIOR TO PLANTING. ALL PLANT SUBSTITUTIONS SHALL BE APPROVED BY THE LANDSCAPE ARCHITECT.

LANDSCAPE DOCUMENTATION PACKAGE.

ALL PLANTS NOT MEETING OR EXCEEDING REQUIREMENTS AND RECOMMENDA-TIONS OF ANSI 260.1 "AMERICAN STANDARD FOR NURSERY STOCK" SHALL BE REJECTED. THE CONTRACTOR SHALL RECEIVE ON-SITE APPROVAL OF PLANT MATERIAL BY THE OWNER'S REPRESENTATIVE PRIOR TO PLANTING. FAILURE TO RECEIVE APPROVAL PRIOR TO PLANTING MAY RESULT IN REJECTION AND THE CONTRACTOR SHALL REPLACE ALL REJECTED PLANT MATERIAL AT HIS EXPENSE. THE OWNER RESERVES THE RIGHT TO INSPECT AND EVALUATE PLANT MATERIAL THROUGHOUT THE CONSTRUCTION AND MAINTENANCE PERIOD.

A MIN. OF 48 HOURS IN ADVANCE FOR THE FOLLOWING SITE OBSERVATIONS AND/OR MEETINGS. A. PRECONSTRUCTION MEETING WITH ALL PARTIES. B. PLANT MATERIAL ON SITE, PRIOR TO INSTALLATION. C. PLANT LOCATIONS STAKED, PRIOR TO PLANTING. D. FINAL PROJECT WALK-THROUGH E. ADDITIONAL SITE OBSERVATIONS DETERMINED BY THE OWNER'S REPRESENTATIVE OR CONTRACTOR.

IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO LOCATE AND PRO-VIDE PLANT MATERIAL AS SPECIFIED ON THIS PLAN. THE CONTRACTOR MAY SUBMIT A REQUEST TO PROVIDE SUBSTITUTIONS FOR THE SPECIFIED PLANT MATERIAL UNDER THE FOLLOWING CONDITIONS: A. ANY SUBSTITUTIONS PROPOSED SHALL BE SUBMITTED TO THE OWNER'S REPRESENTATIVE WITHIN TWO WEEKS OF THE AWARD OF CONTRACT. SUBSTITUTIONS MUST MEET EQUIVALENT DESIGN AND FUNCTIONAL GOALS OF THE ORIGINAL PLANT MATERIAL AS DETERMINED BY THE OWNER'S REPRESENTATIVE. ANY CHANGES MUST HAVE THE APPROVAL OF THE OWNER'S REPRESENTATIVE. B. THE REQUEST MUST BE ACCOMPANIED BY AT LEAST THREE NOTICES FROM PLANT SUPPLIERS THAT THE PLANT MATERIAL SPECIFIED IS NOT AVAILABLE PRIOR TO THE CONSTRUCTION


SUBMIT I DIGITAL COPY OF ALL LANDSCAPE MATERIALS FOR APPROVAL PRIOR TO CONSTRUCTION. SUBMIT DIGITAL PHOTOS OF ALL PLANT MATERIAL WITH A STANDARD MEASURING DEVICE CLEARLY VISIBLE FOR APPROVAL AND RECORD PRIOR TO DELIVERY TO THE SITE.

THE CONTRACTOR SHALL COORDINATE WITH THE OWNER'S SITE SUPERINTENDENT IN VARIFIYING ELEVATION OF FINISHED GRADE PER CIVIL IS COMPLETE AND IN PLACE PRIOR TO START OF WORK.

THE LANDSCAPE CONTRACTOR SHALL INSURE POSITIVE DRAINAGE IN ALL PLANTER AREAS PER CIVIL ENGINEERS GRADING PLAN AFTER MOUNDING/LANDSCAPE IMPROVEMENTS ARE COMPLETE.

LANDSCAPE CALCULATIONS

TOTAL PARKING STALLS =60 PARKING AREA LANDSCAPE REQUIRED (8 S.F. / 1 STALL) = 480 S.F. PARKING AREA LANDSCAPE PROVIDED = 2,170 S.F. - TOTAL PARKING AREA = 10,260 S.F. PARKING AREA SHADE REQUIRED (25%) = 2,565 S.F. - PARKING AREA SHADE PROVIDED (41%) = 4,285 S.F.

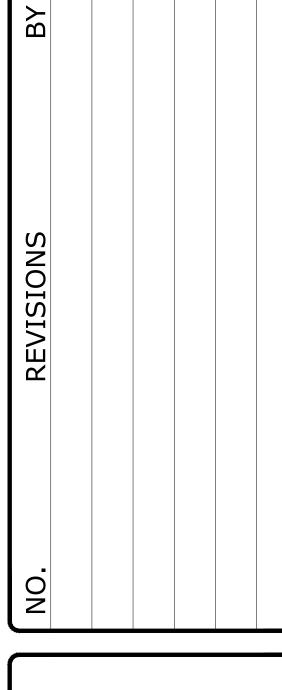



区

 A

ORIGINAL ISSUE

CURRENT SET ISSUE DATE: {01.06.2025}


DRAWING NUMBER:

PERMIT SET / CONSTRUCTION ISSUE

LANDSCAPE PLAN

SCALE: 1" = 20'-0"

KIER + WRIGHT PROJECT NUMBER: A23349-1

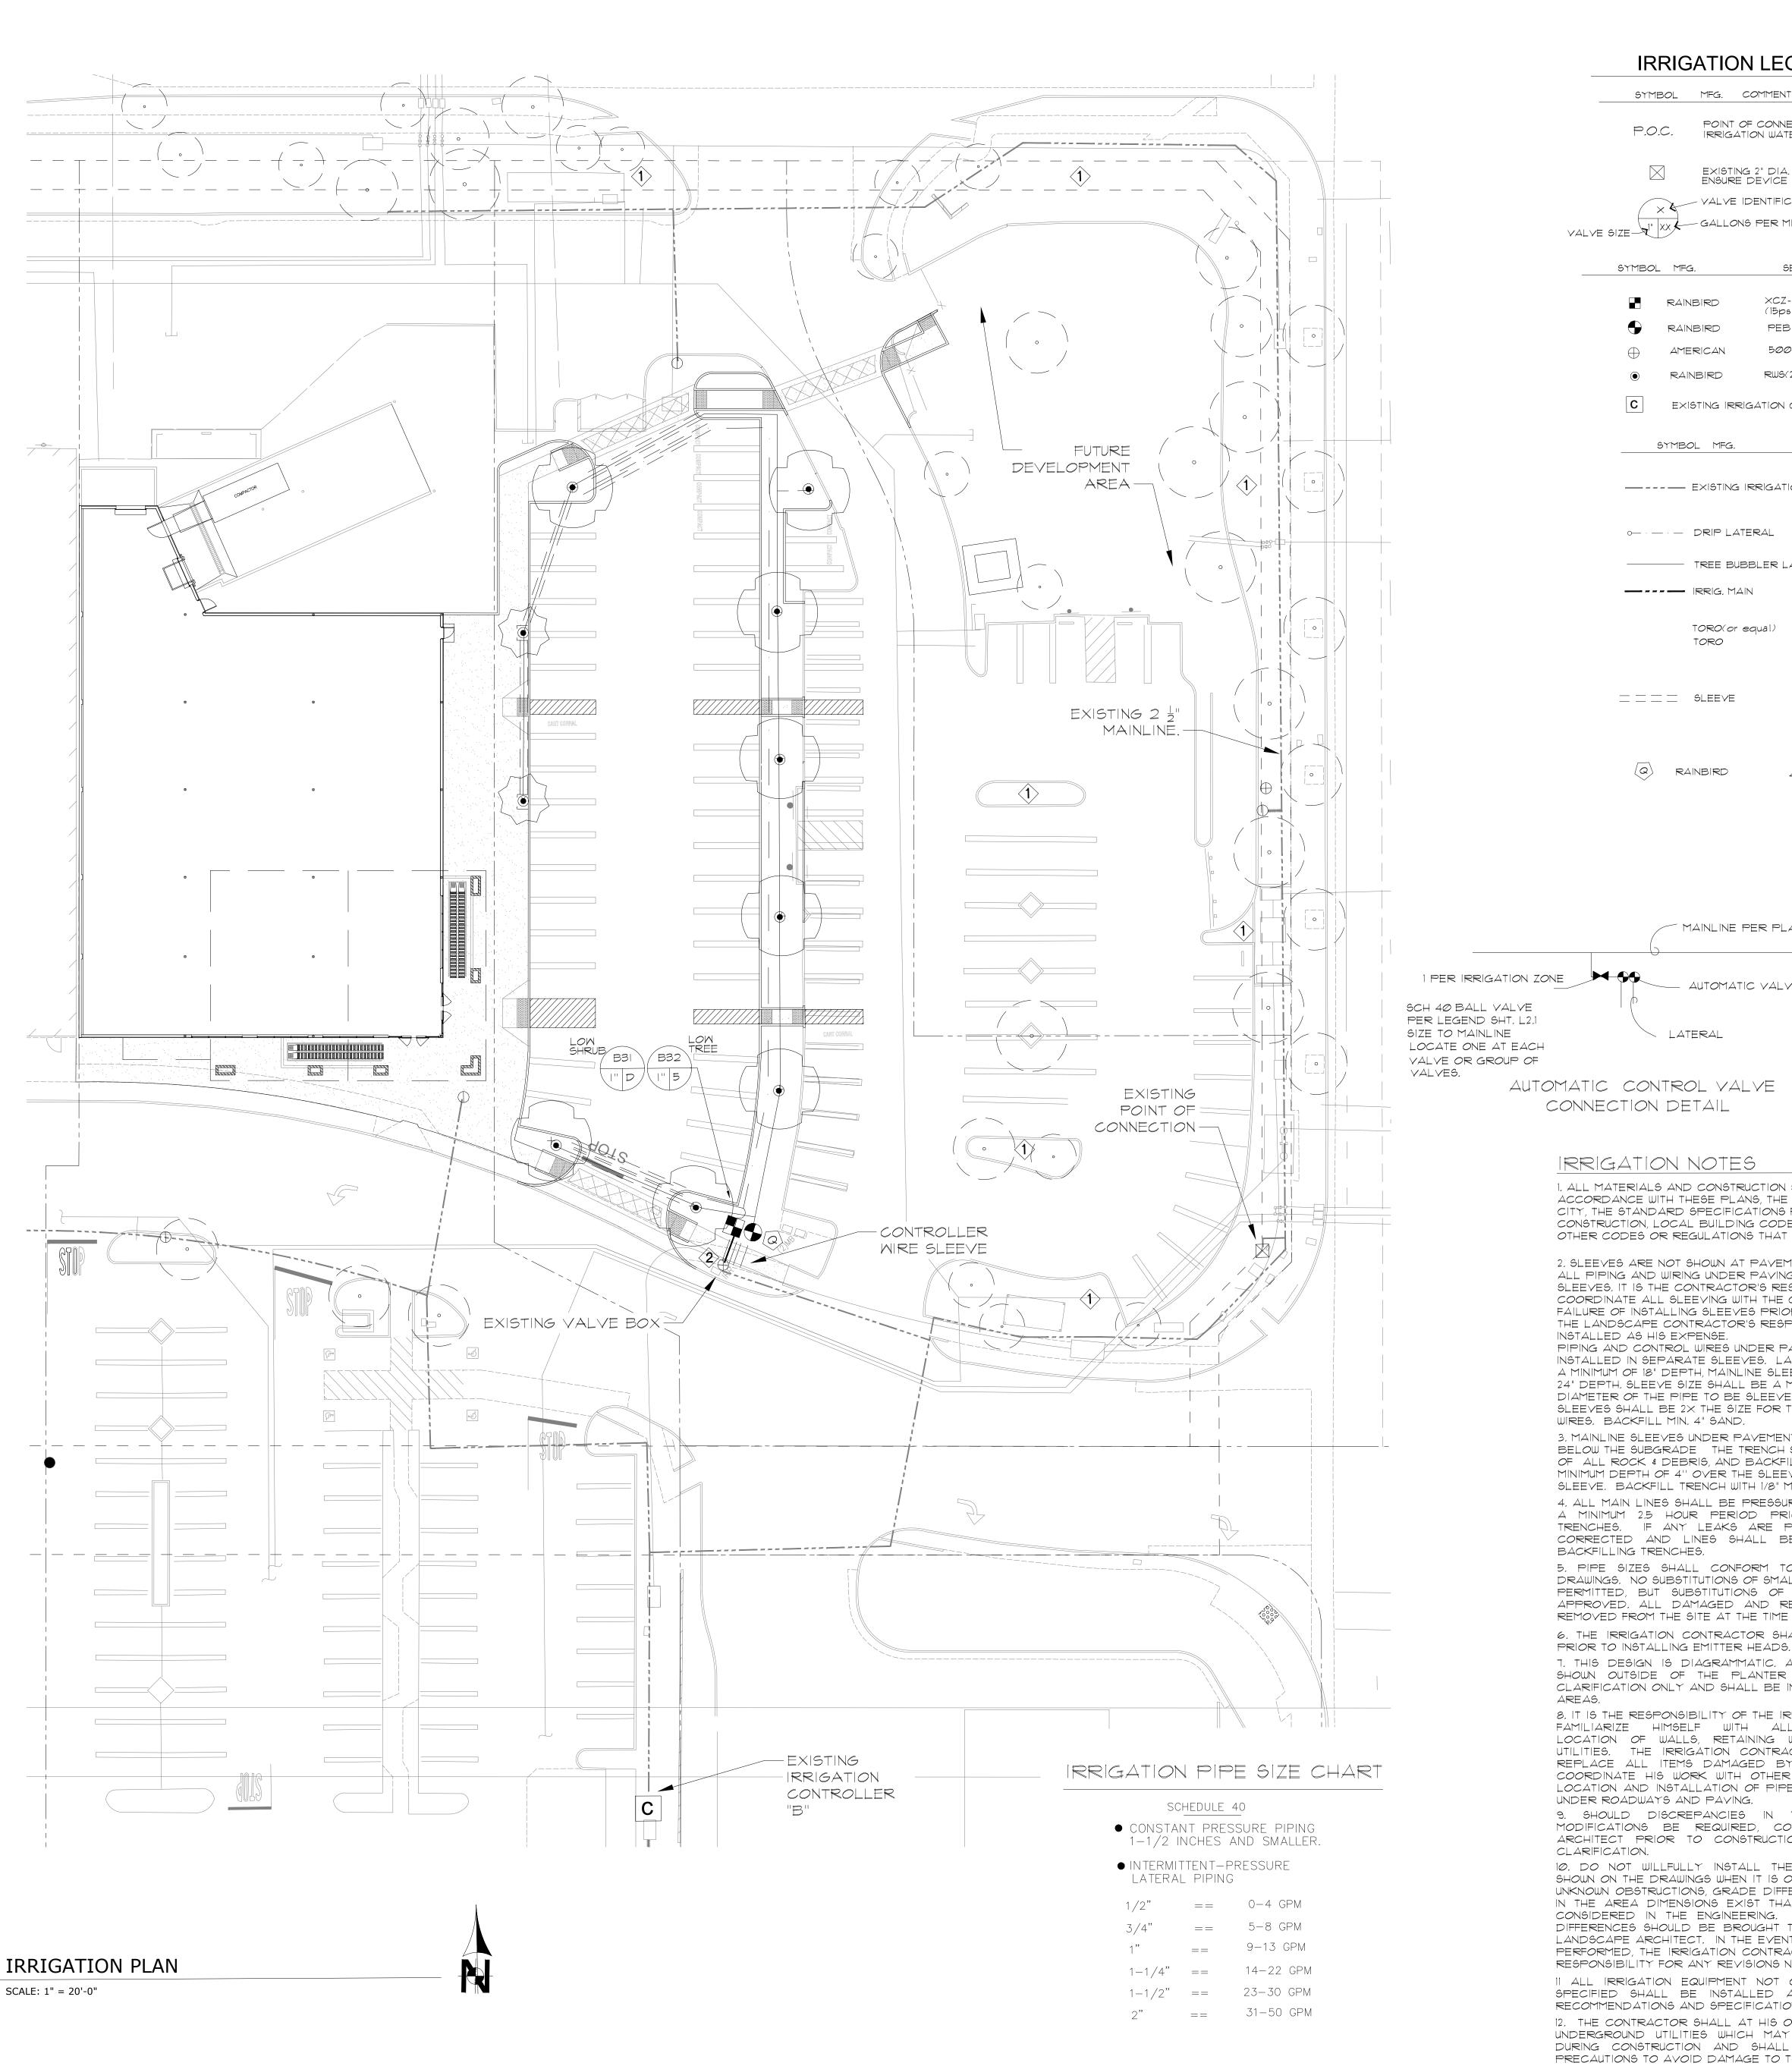

IRRIGATION LEGEND:

SYMBOL MFG. COMMENTS

POINT OF CONNECTION (CONNECT TO IRRIGATION WATER MAINLINE SUPPLY LINE) IRRIGATION WATER METER - EXISTING

EXISTING 2" DIA, 'FEBCO' R.P. BACKFLOW DEVICE. TO REMAIN, VERIFY LOCATION PRIOR TO INSTALLATION. ENSURE DEVICE COMPLIES WITH ALL LOCAL CODES/ORDINANCE.

- VALVE IDENTIFICATION NUMBER AND CONTROLLER LETTER IDENTIFICATION

-GALLONS PER MINUTE OR "D" FOR DRIP IRRIGATION

EXISTING IRRIGATION CONTROLLER "B"

---- EXISTING IRRIGATION MAINLINE.

500 SERIES

SERIES/MODEL COMMENTS SYMBOL MFG. XCZ-100-PRB-COM CONTROL ZONE/FILTER KIT - 1" (MAX. FLOW OF 20 GPM) RAINBIRD (15psi min.-.3 gpm min) PEB-R SERIES REMOTE CONTROL VALVE FOR TREE BUBBLERS/SPRAY HEADS (SIZE AS NOTED) RAINBIRD

RWS(2) WITH (1)14Ø1 BUBBLER EA. PRESS. COMP. BUBBLERS 20-90 PSI G.P.M. - .25 ea.

GATE VALVE / ISOLATION VALVE (SIZE PER MAINLINE)

SERIES/MODEL COMMENTS SYMBOL MFG.

3/4" SCH. 40 PVC INSTALL @ 18" MIN. BELOW FINISH GRADE (NOT SHOWN) O · · · · · DRIP LATERAL RUN LATERAL TO ALL INDIVIDUAL PLANTER AREAS PER VALVE. TREE BUBBLER LATERAL INSTALL @ 8" MIN. BELOW FINISH GRADE INSTALL @ 36" MIN. BELOW FINISH GRADE ADD WARNING TAPE @ 6" DEPTH ABOVE PIPE. **— - - - —** IRRIG. MAIN 1" SCH 40 PVC 3/4" FLEXIBLE TUBING TORO(or equal) INSTALL @ 8" MIN. BELOW FINISH GRADE (NOT SHOWN) TURBO-SC TORO SINGLE OUTLET PRESSURE EMITTERS COMPENSATING - INSTALL DRIP TO ALL PLANTS @ (2) | GPH/I GAL, (2) | GPH/5 GAL,

(3) 2 GPH/15 GAL, (4) 2 GPH/24" OR 36" BOX (NOT SHOWN) SCH. 40 PVC _ _ _ _ SLEEVE 2" (MIN.) LARGER THAN IRRIG. PIPE INSTALL @ SPECIFIED DEPTH PER MAIN LINE OR LATERAL PIPE, EXTEND SLV. 12" BEYOND PAVEMENT, STAKE TO MARK. (NOT SHOWN FOR LATERALS UNDER PARKING PAVEMENT)

(Q) RAINBIRD I" QUICK COUPLER VALVE, 2 PIECE BODY W/ LOCKING COVER

IRRIGATION LEGEND NOTES

LOCAL CODES AND ORDINANCES.

EXISTING LANDSCAPE IRRIGATION SYSTEM TO REMAIN. ENSURE PROPER OPERATION AND COVERAGE OF IRRIGATION DURING AND AFTER NEW CONSTRUCTION.

NEW IRRIGATION VALVE CIRCUIT CONNECTION TO (E) IRRIGATION MAINLINE. CONNECT NEW IRRIGATION MAINLINE AT THE SAME SIZE DIAMETER OR GREATER OF EXISTING IRRIGATION MAINLINE. CONNECT NEW IRRIGATION CONTROL WIRES TO SPARE/EXTRA CONTROL WIRE. IF EXTRA CONTROL WIRE IS NOT AVAILABLE, ADD IRRIGATION CONTROL 'DOUBLER/EXPANDER' TO ADJACENT EXISTING CONTROL VALVE. (BY -TRANSITIONAL SYSTEMS MFG. AT "EASYIRRIGATIONREPAIR.COM" OR EQUAL). VERIFY SYSTEM CAPACITY PRIOR TO CONSTRUCTION. ENSURE ENTIRE IRRIGATION SYSTEM IS COMPLIANT WITH ALL

IRRIGATION NOTES

1. ALL MATERIALS AND CONSTRUCTION SHALL BE IN ACCORDANCE WITH THESE PLANS, THE REQUIREMENTS OF THE CITY, THE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, LOCAL BUILDING CODES, ORDINANCES, AND OTHER CODES OR REGULATIONS THAT APPLY.

MAINLINE PER PLAN

AUTOMATIC VALVE

LATERAL

2. SLEEVES ARE NOT SHOWN AT PAVEMENT CROSSINGS. ALL PIPING AND WIRING UNDER PAVING SHALL BE INSTALLED IN SLEEVES. IT IS THE CONTRACTOR'S RESPONSIBILITY TO COORDINATE ALL SLEEVING WITH THE GENERAL CONTRACTOR. FAILURE OF INSTALLING SLEEVES PRIOR TO PAVING SHALL BE THE LANDSCAPE CONTRACTOR'S RESPONSIBILITY AND SHALL BE INSTALLED AS HIS EXPENSE PIPING AND CONTROL WIRES UNDER PAYEMENT SHALL BE INSTALLED IN SEPARATE SLEEVES. LATERAL SLEEVES SHALL BE A MINIMUM OF 18" DEPTH, MAINLINE SLEEVES SHALL BE A MINIMUM 24" DEPTH. SLEEVE SIZE SHALL BE A MINIMUM OF TWICE (2X) O.D. DIAMETER OF THE PIPE TO BE SLEEVED. CONTROLLER WIRE SLEEVES SHALL BE 2X THE SIZE FOR THE REQUIRED NUMBER OF

WIRES. BACKFILL MIN. 4" SAND. 3. MAINLINE SLEEVES UNDER PAVEMENT SHALL BE INSTALLED 24" BELOW THE SUBGRADE THE TRENCH SHALL BE CLEANED FREE OF ALL ROCK & DEBRIS, AND BACKFILLED WITH SAND TO A MINIMUM DEPTH OF 4" OVER THE SLEEVE OVER AND UNDER THE SLEEVE. BACKFILL TRENCH WITH 1/8" MINUS.

4. ALL MAIN LINES SHALL BE PRESSURE TESTED AT 120 PSI FOR A MINIMUM 2.5 HOUR PERIOD PRIOR TO BACKFILLING OF TRENCHES. IF ANY LEAKS ARE PRESENT THEY SHALL BE CORRECTED AND LINES SHALL BE RE-TESTED PRIOR TO BACKFILLING TRENCHES.

5. PIPE SIZES SHALL CONFORM TO THOSE SHOWN ON THE DRAWINGS. NO SUBSTITUTIONS OF SMALLER PIPE SIZES SHALL BE PERMITTED, BUT SUBSTITUTIONS OF LARGER SIZES MAY BE APPROVED. ALL DAMAGED AND REJECTED PIPE SHALL BE REMOVED FROM THE SITE AT THE TIME OF SAID REJECTION. 6. THE IRRIGATION CONTRACTOR SHALL FLUSH ALL LATERALS

7. THIS DESIGN IS DIAGRAMMATIC. ALL PIPING, VALVES, ETC., SHOWN OUTSIDE OF THE PLANTER AREAS IS FOR DESIGN CLARIFICATION ONLY AND SHALL BE INSTALLED IN THE PLANTER

8. IT IS THE RESPONSIBILITY OF THE IRRIGATION CONTRACTOR TO FAMILIARIZE HIMSELF WITH ALL GRADE DIFFERENCES, LOCATION OF WALLS, RETAINING WALLS, STRUCTURES AND UTILITIES. THE IRRIGATION CONTRACTOR SHALL REPAIR OR REPLACE ALL ITEMS DAMAGED BY HIS WORK. HE SHALL COORDINATE HIS WORK WITH OTHER CONTRACTORS, FOR THE LOCATION AND INSTALLATION OF PIPE SLEEVES AND LATERALS UNDER ROADWAYS AND PAVING.

9. SHOULD DISCREPANCIES IN THE PLANS OR FIELD MODIFICATIONS BE REQUIRED, CONTACT THE LANDSCAPE ARCHITECT PRIOR TO CONSTRUCTION FOR RESOLUTION OR CLARIFICATION.

10. DO NOT WILLFULLY INSTALL THE IRRIGATION SYSTEM AS SHOWN ON THE DRAWINGS WHEN IT IS OBVIOUS IN THE FIELD THAT UNKNOWN OBSTRUCTIONS, GRADE DIFFERENCES OR DIFFERENCES IN THE AREA DIMENSIONS EXIST THAT MIGHT NOT HAVE BEEN CONSIDERED IN THE ENGINEERING. SUCH OBSTRUCTIONS OR DIFFERENCES SHOULD BE BROUGHT TO THE ATTENTION OF THE LANDSCAPE ARCHITECT. IN THE EVENT THIS NOTIFICATION IS NOT PERFORMED, THE IRRIGATION CONTRACTOR SHALL ASSUME FULL RESPONSIBILITY FOR ANY REVISIONS NECESSARY.

II ALL IRRIGATION EQUIPMENT NOT OTHERWISE DETAILED OR SPECIFIED SHALL BE INSTALLED AS PER MANUFACTURER'S RECOMMENDATIONS AND SPECIFICATIONS. 12. THE CONTRACTOR SHALL AT HIS OWN EXPENSE, LOCATE ALL UNDERGROUND UTILITIES WHICH MAY AFFECT HIS OPERATION DURING CONSTRUCTION AND SHALL TAKE ALL NECESSARY PRECAUTIONS TO AVOID DAMAGE TO THE SAME.

13. THE CONTRACTOR SHALL USE EXTREME CAUTION WHEN WORKING NEAR OVERHEAD OR UNDERGROUND POWER AND/OR TELEPHONE, WATER, GAS AND SEWER FACILITIES SO AS TO SAFELY PROTECT ALL UTILITIES, PERSONNEL, AND EQUIPMENT, AND SHALL BE RESPONSIBLE FOR ALL COSTS AND LIABILITY IN CONNECTION THEREWITH.

14. THE CONTRACTOR SHALL TAKE ALL PRECAUTIONARY MEASURES NECESSARY TO PROTECT EXISTING IMPROVEMENTS WHICH ARE TO REMAIN IN PLACE, FROM DAMAGE, AND ALL SUCH IMPROVEMENTS DAMAGED BY THE CONTRACTOR'S OPERATIONS SHALL BE REPAIRED OR RECONSTRUCTED SATISFACTORY TO THE OWNER AT THE EXPENSE OF THE CONTRACTOR. 15. AN OPEN TRENCH INSPECTION OF THE REDUCED PRESSURE

PRINCIPLE BACKFLOW DEVICE SHALL BE PERFORMED BY THE WATER PURVEYOR PRIOR TO OPERATING THE IRRIGATION 16. THE IRRIGATION CONTROLLER SHALL BE WIRED DIRECTLY TO THE POWER SOURCE. IT SHALL BE THE RESPONSIBILITY OF THE

LANDSCAPE CONTRACTOR TO BRING CONTROLLER WIRING TO THE CONTROLLER LOCATION. CONNECTING THE CONTROLLER TO THE POWER SOURCE SHALL BE THE RESPONSIBILITY OF A LICENSED ELECTRICAL CONTRACTOR. THE INSTALLATION SHALL BE IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ANY LOCAL CODES OR ORDINANCES THAT APPLY. IT SHALL BE THE ELECTRICAL CONTRACTOR'S RESPONSIBILITY TO COORDINATE THE POWER SOURCE AND EXACT LOCATION OF THE CONTROLLER WITH OWNER'S REPRESENTATIVE. FINAL CONNECTION OF THE VALVE WIRES TO THE CONTROLLER SHALL

BE THE LANDSCAPE CONTRACTOR'S RESPONSIBILITY. 17. INSTALL REMOTE CONTROL VALVES, PRESSURE REGULATOR AND QUICK COUPLER VALVES AS DETAILED, INSTALL R.C.V. ID TAGS MANUFACTURED BY T. CHRISTY, ENT. STANDARD SIZE, 1 1/8" HOT STAMPED BLACK LETTERS ON YELLOW BACKGROUND ON SOLENOID WIRES. LETTERS TO CONFORM TO

CONTROLLER/STATION NUMBER. 18. ALL VALVE CONTROL WIRE SHALL BE SIZED PER CONTROLLER AND VALVE MANUFACTURER'S RECOMMENDATIONS, BUT NOT TO BE LESS THAN NO. 14 AWG COPPER UL APPROVED FOR DIRECT BURIAL IN GROUND. CONNECT WIRES AS DETAILED PER

MANUFACTURERS SPECIFICATIONS. 19. ALL BACKFILL MATERIAL, OTHER THAN SAND AROUND THE MAINLINE, SHALL BE FREE OF ROCKS, CLODS AND OTHER EXTRANEOUS MATERIALS, COMPACT BACKFILL TO ORIGINAL


20. AT JOB COMPLETION, SUPPLY OWNER WITH ONE (2) SETS OF MATCHING QUICK COUPLER VALVE KEY AND HOSE SWIVEL, AND TWO (2) KEYS FOR EACH CONTROLLER, ALL MANUFACTURERS


. ACCURATELY AND NEATLY MARK ALL FIELD CHANGES MADE DURING CONSTRUCTION ON A DAILY BASIS ON ONE PLAN SET. ALL DRAFTING TO BE DONE BY A COMPETENT DRAFTSMAN. SUBMIT TO OWNER FOR RECORD. DIMENSION MAINLINE OFF BACK OF CURB OR SIDE WALK FOR REFERENCE ON CONSTRUCTION PLAN SET. LOCATE ALL RAIN SENSORS, DRAINS ON THE PLAN. A DIAGRAM OF THE IRRIGATION PLAN SHOWING HYDROZONES SHALL BE KEPT WITH THE IRRIGATION CONTROLLER FOR SUBSEQUENT MANAGEMENT PURPOSES.

22. ALL IRRIGATION INSTALLATION AND EQUIPMENT SHALL GUARANTEED FOR A PERIOD OF ONE YEAR.

23. REUSE OR RECYCLE EXCESS CONSTRUCTION MATERIAL 24.PROVIDE (1) DIGITAL COPY OF SUBMITTAL PACKAGE OF ALL IRRIGATION COMPONENTS AND MATERIALS FOR APPROVAL BY LANDSCAPE ARCHITECT PRIOR TO COMMENCING WORK.

25. THE IRRIGATION CONTRACTOR SHALL FIELD VERIFY PRESSURE AT THE POINT OF CONNECTION, THE SYSTEM IS DESIGNED WITH A MINIMUM OF 50 PSI AT THE METER POINT OF CONNECTION. PRESSURE REGULATING DEVICES SHALL ARE REQUIRED IF THE WATER PRESSURE IS BELOW OR EXCEEDS THE RECOMMENDED PRESSURE OF THE SPECIFIED IRRIGATION DEVICES.

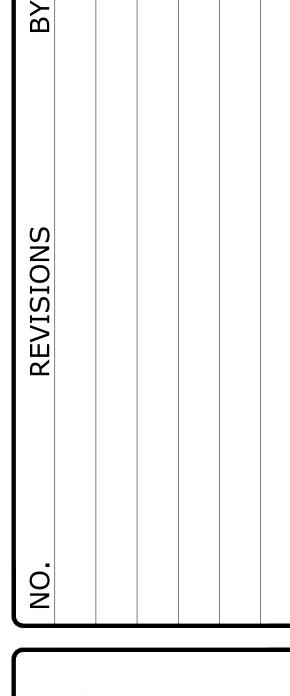



 A

ORIGINAL ISSUE


DRAWING NUMBER:

PERMIT SET / CONSTRUCTION ISSUE

CURRENT SET ISSUE


DATE: {01.06.2025}


OF X SHEETS

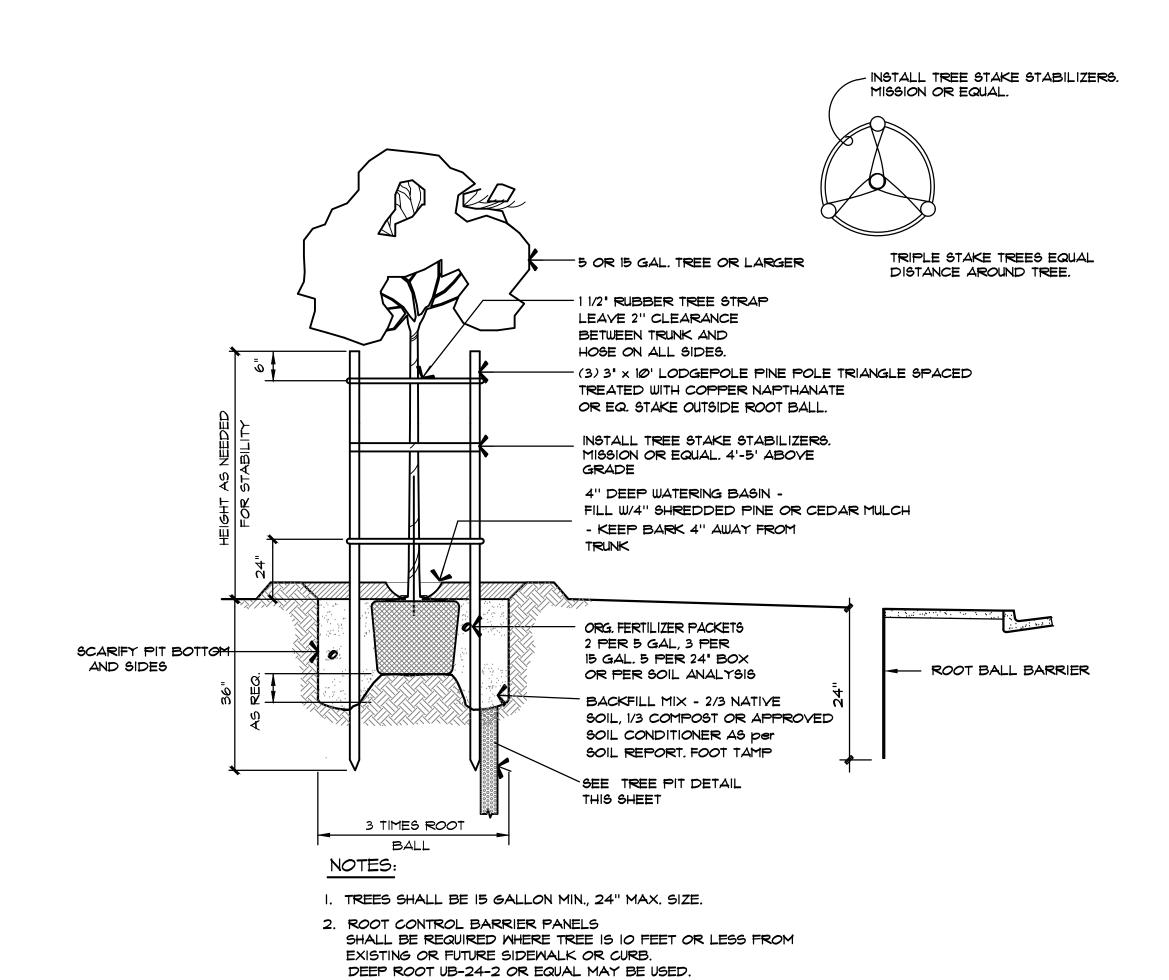

SET ROOT CROWN I" ABOVE SURROUNDING FINISH GRADE TEMPORARY EARTH BERM THROUGH
END OF MAINTENANCE PERIOD WHERE
BUBBLERS OR DRIP USED MAINTAIN A MINIMUM OF A 2' DIA. OPEN AREA IN SOD AT TREE WELL. FOR TREES IN LAWN AREAS TREE ROOTBALL BACKFILL: ORGANIC AMENDMENT PER SOILS ANALYSIS SOIL. INSTALL BACKFILL IN 6" LIFTS, WATER TO SETTLE. - SET ROOTBALL ON MOUND OF UNDISTURBED OR COMPACTED NATIVE SOIL - SCARIFY ROOTBALL AND PIT SIDES IF TREE HOLE DOES NOT DRAIN INSTALL A ROCK SUMP 12" DIAMETER DRILL 2'-6" DEEP BELOW BOTTOM OF PLANTER HOLE. FILL WITH 3/4" GRAVEL, COVER WITH FILTER FABRIC. 3 x ROOTBALL WIDTH

Tree Pit Detail-All Trees NOT TO SCALE

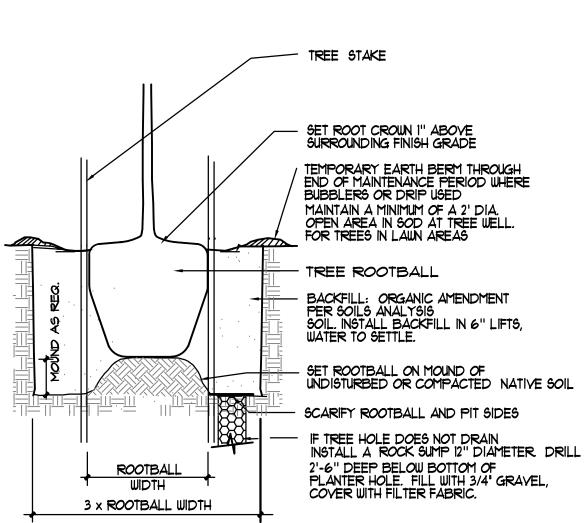

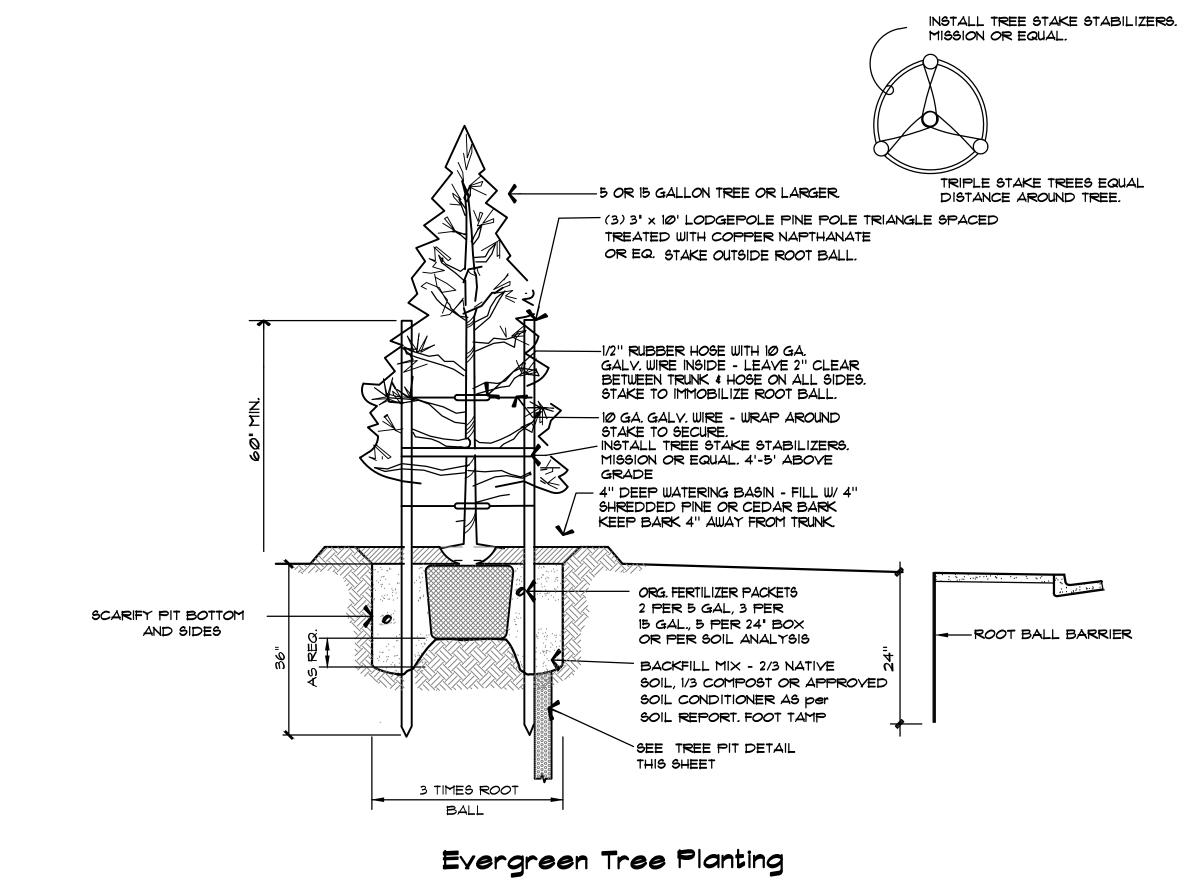


Deciduous Tree Planting NOT TO SCALE

4. ROOT BARRIERS SHALL NOT BE CUT.


LENGTH OF BARRIER = 8' CENTERED ON TREE.

(INDIVIDUAL BUBBLERS WITH WATERING BASIN).

3. TREES SHALL BE PROVIDED WITH AUTOMATIC IRRIGATION SYSTEMS

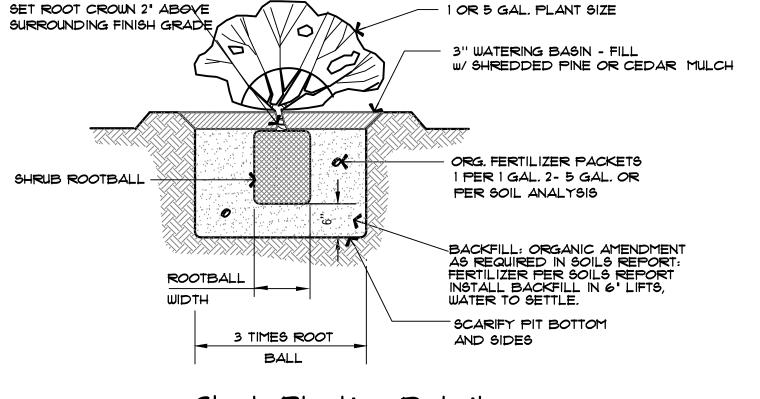

Shrub Planting Detail NOT TO SCALE

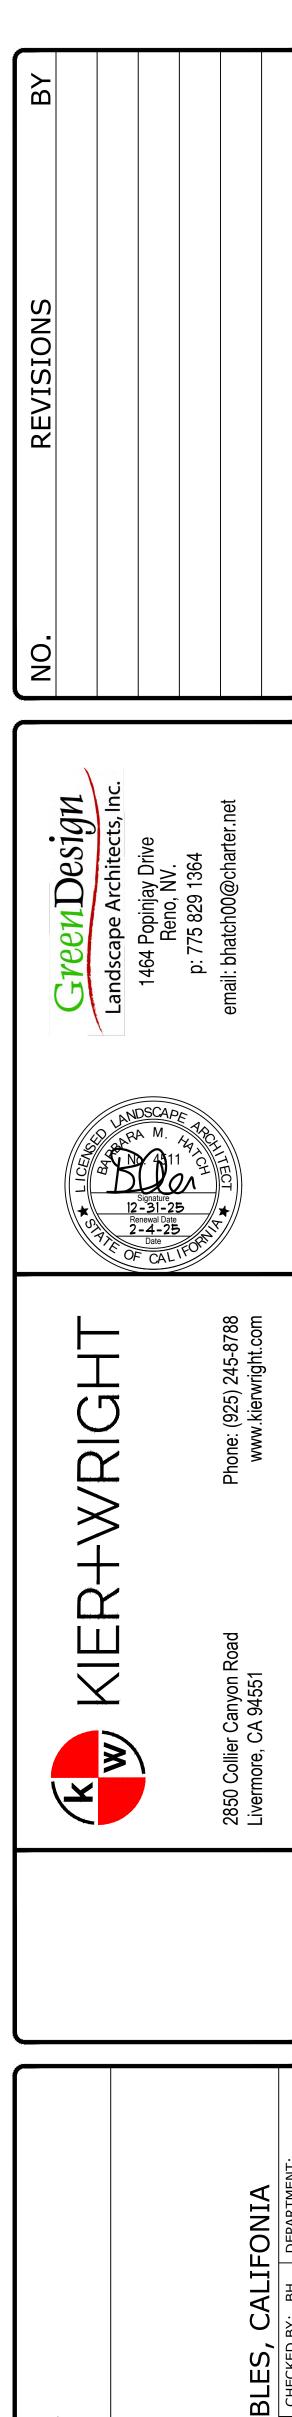


ORIGINAL ISSUE

CURRENT SET ISSUE DATE: {01.06.2025}

PERMIT SET / CONSTRUCTION ISSUE

OF X SHEETS

DRAWING NUMBER:

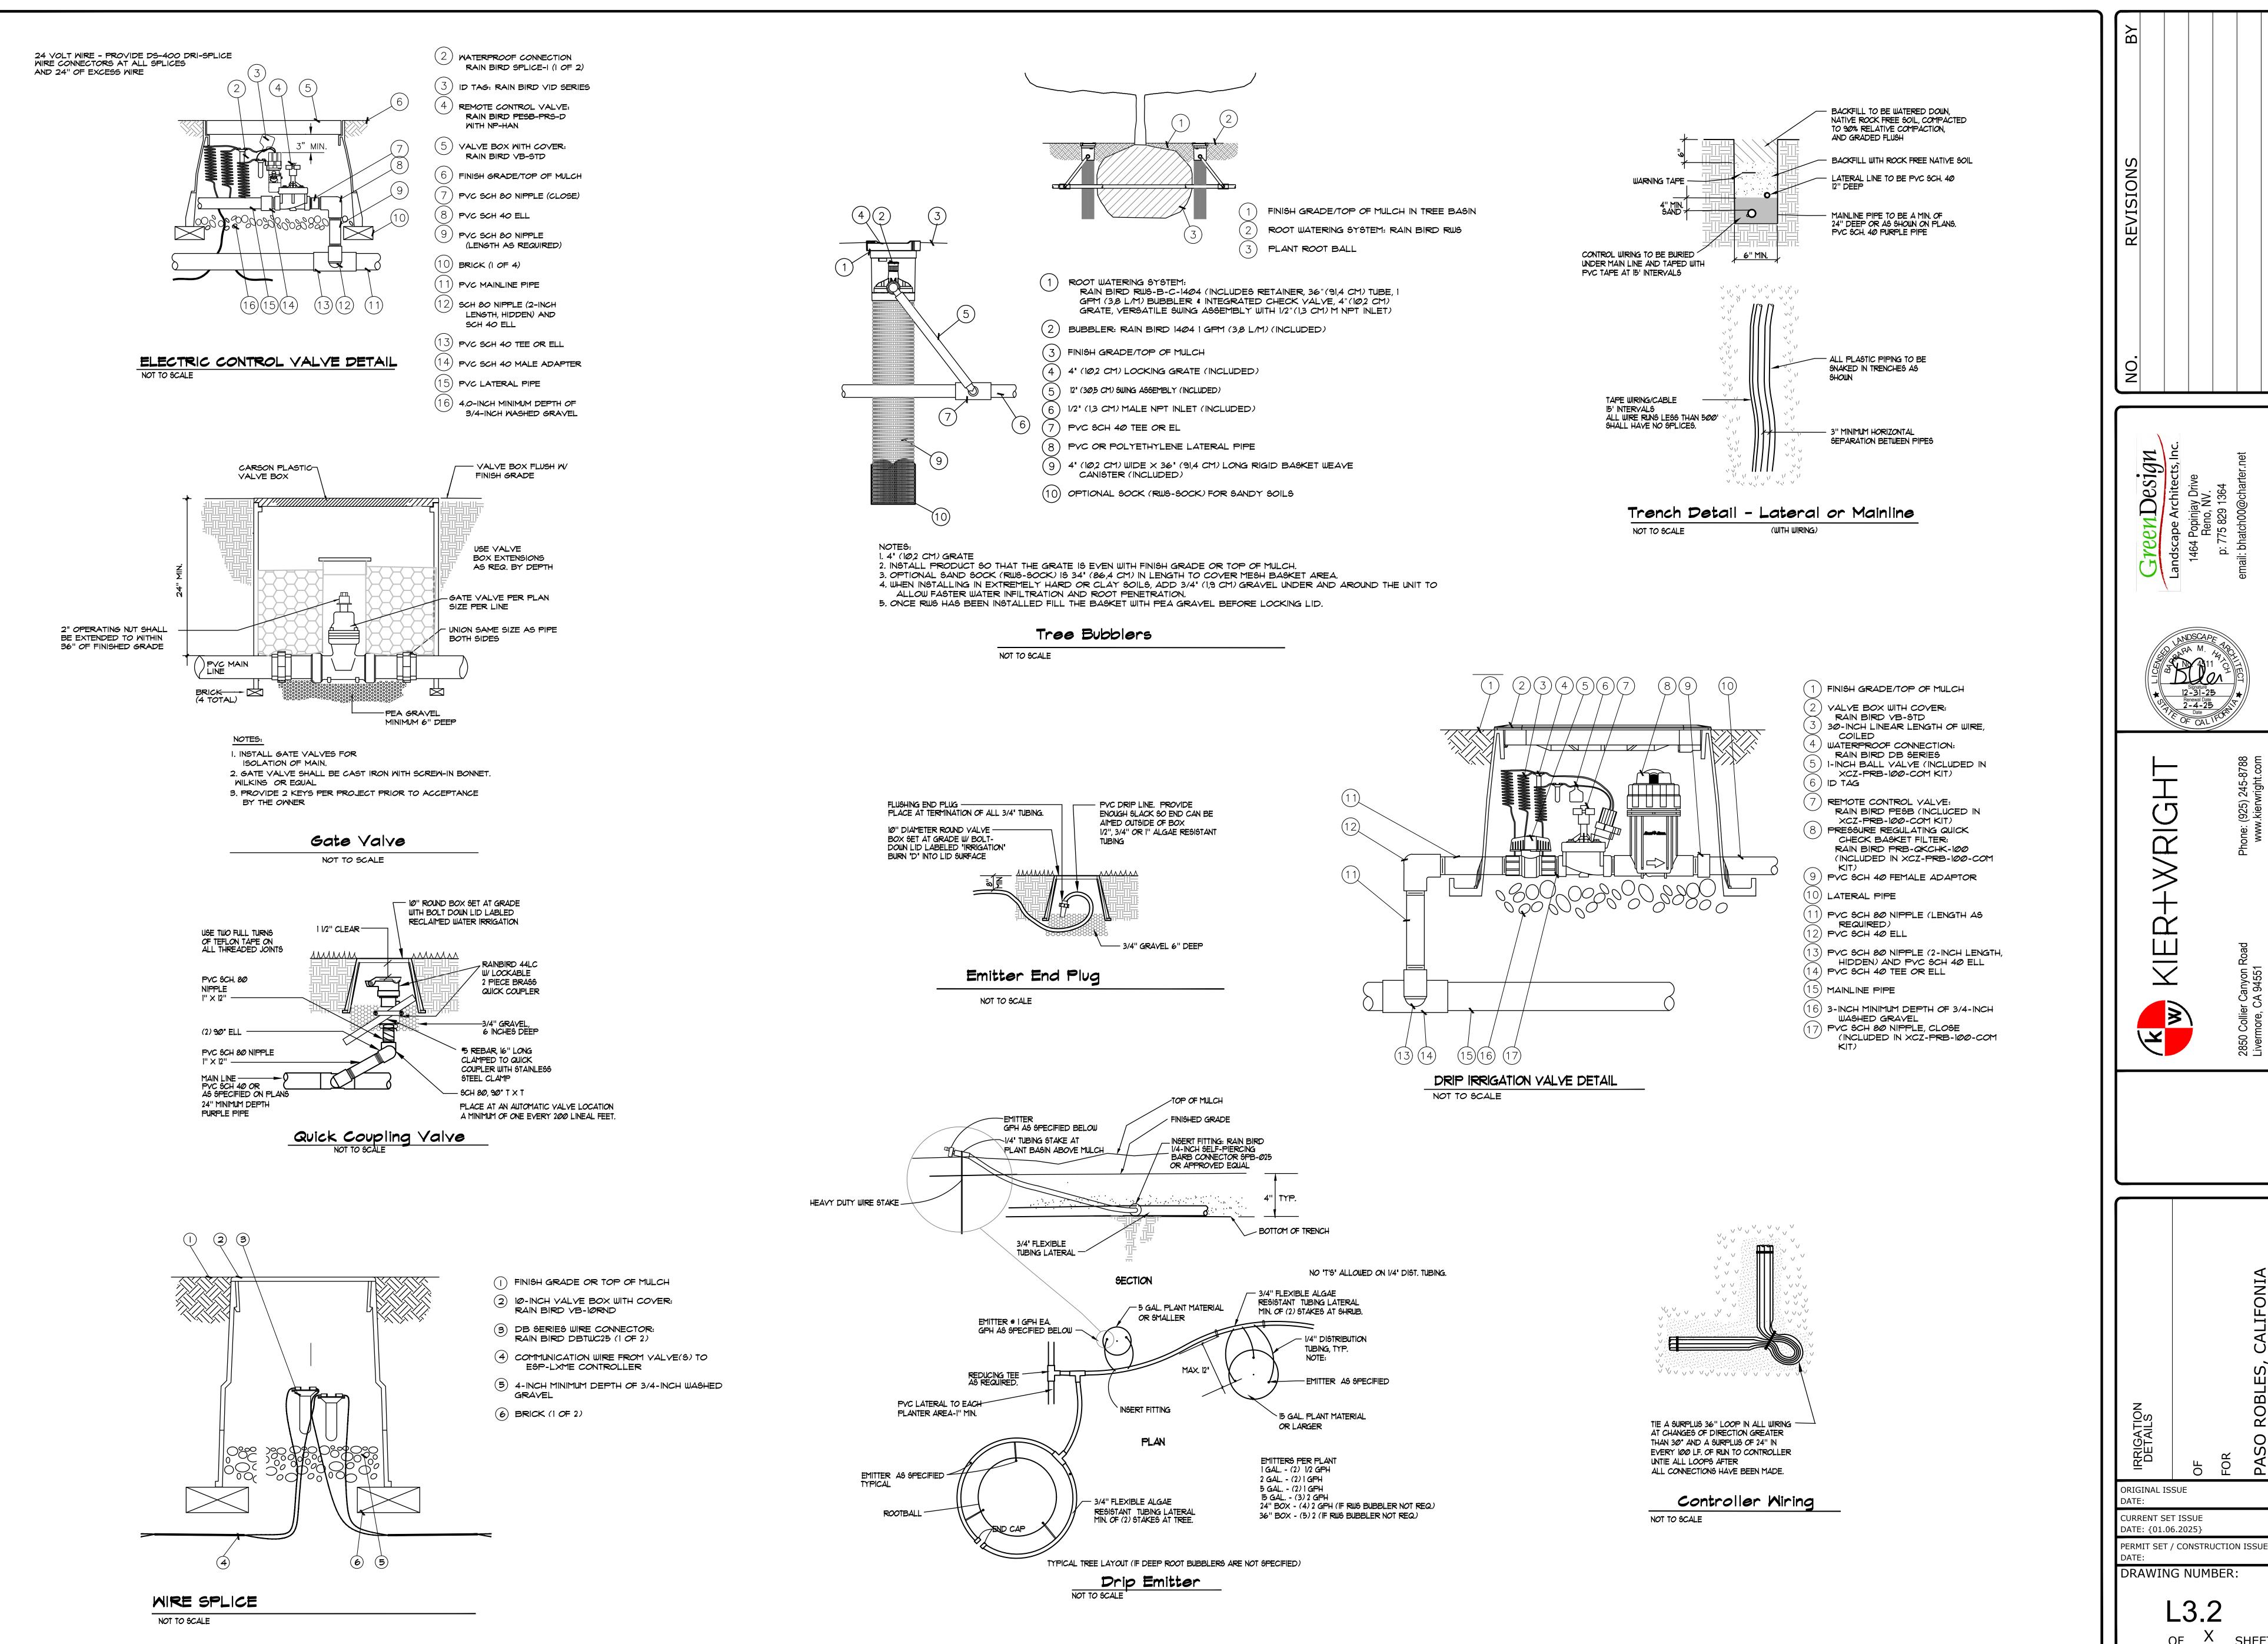

reenDesign

图图

M M

OF X SHEETS

Golden Hills Plaza

MAJOR 4 - SHELL BUILDING **EXTERIOR FINISHES**

Golden Hill Road, Paso Robles, Ca



ENTRY CANOPY WALLS



FINISH 'A'

MATERIAL: LOW-LUSTRE EXTERIOR PAINT OVER STUCCO

COLOR: #A1816 PARCHMENT (OLD #724) MFR: ICI

FACIA BOARDS



FINISH 'F'

MATERIAL: LOW-LUSTRE EXTERIOR PAINT OVER STUCCO

COLOR: #268 EMBERGLO

MFR: ICI

WOOD BARGE BRACKETS



FINISH 'Q'

MATERIAL: LOW-LUSTRE EXTERIOR PAINT OVER PRESSURE TREATED WOOD

COLOR: #A1693 TOBACCO BROWN (SUBSTITUTE FOR #266) MFR: ICI

STANDING SEAM METAL **ROOFS / AWNINGS**



FINISH 'S'

MATERIAL: METAL WITH KYNAR 500 + **HYLAR 5000 RESIN COATING**

COLOR: W72 **TERRA COTTA**

MFR: METAL SALES CORP.

SPLIT FACED CMU WALLS



FINISH 'DD'

MATERIAL: SPLIT FACED CONCRETE MASONRY UNITS

COLOR:

OAK COLOR

MFR: ANGELUS MFR: ICI

FACADE WALLS



FINISH 'C'

MATERIAL: LOW-LUSTRE EXTERIOR PAINT OVER STUCCO

COLOR: #A1761 ONION SKIN TAN (OLD #421) MFR: ICI

FACADE PILASTERS, CORNICE, + TRIM




FINISH 'M'

MATERIAL: LOW-LUSTRE EXTERIOR PAINT OVER **STUCCO**

COLOR: **#510 EASTLAKE**

MFR: ICI

ALUMINUM STOREFRONT DOOR AND WINDOWS



FINISH 'FF'

MATERIAL: ALUMINUM DOORS, FRAMES, + MULLIONS

COLOR:

CLEAR ANODIZED

MFR: KAWNEER OR EQUAL

MANUFACTURED STONE VENEER



FINISH 'T'

MATERIAL: STONE - EASTERN MOUNTAIN LEDGE

COLOR: ASPEN

MFR: CORONADO